


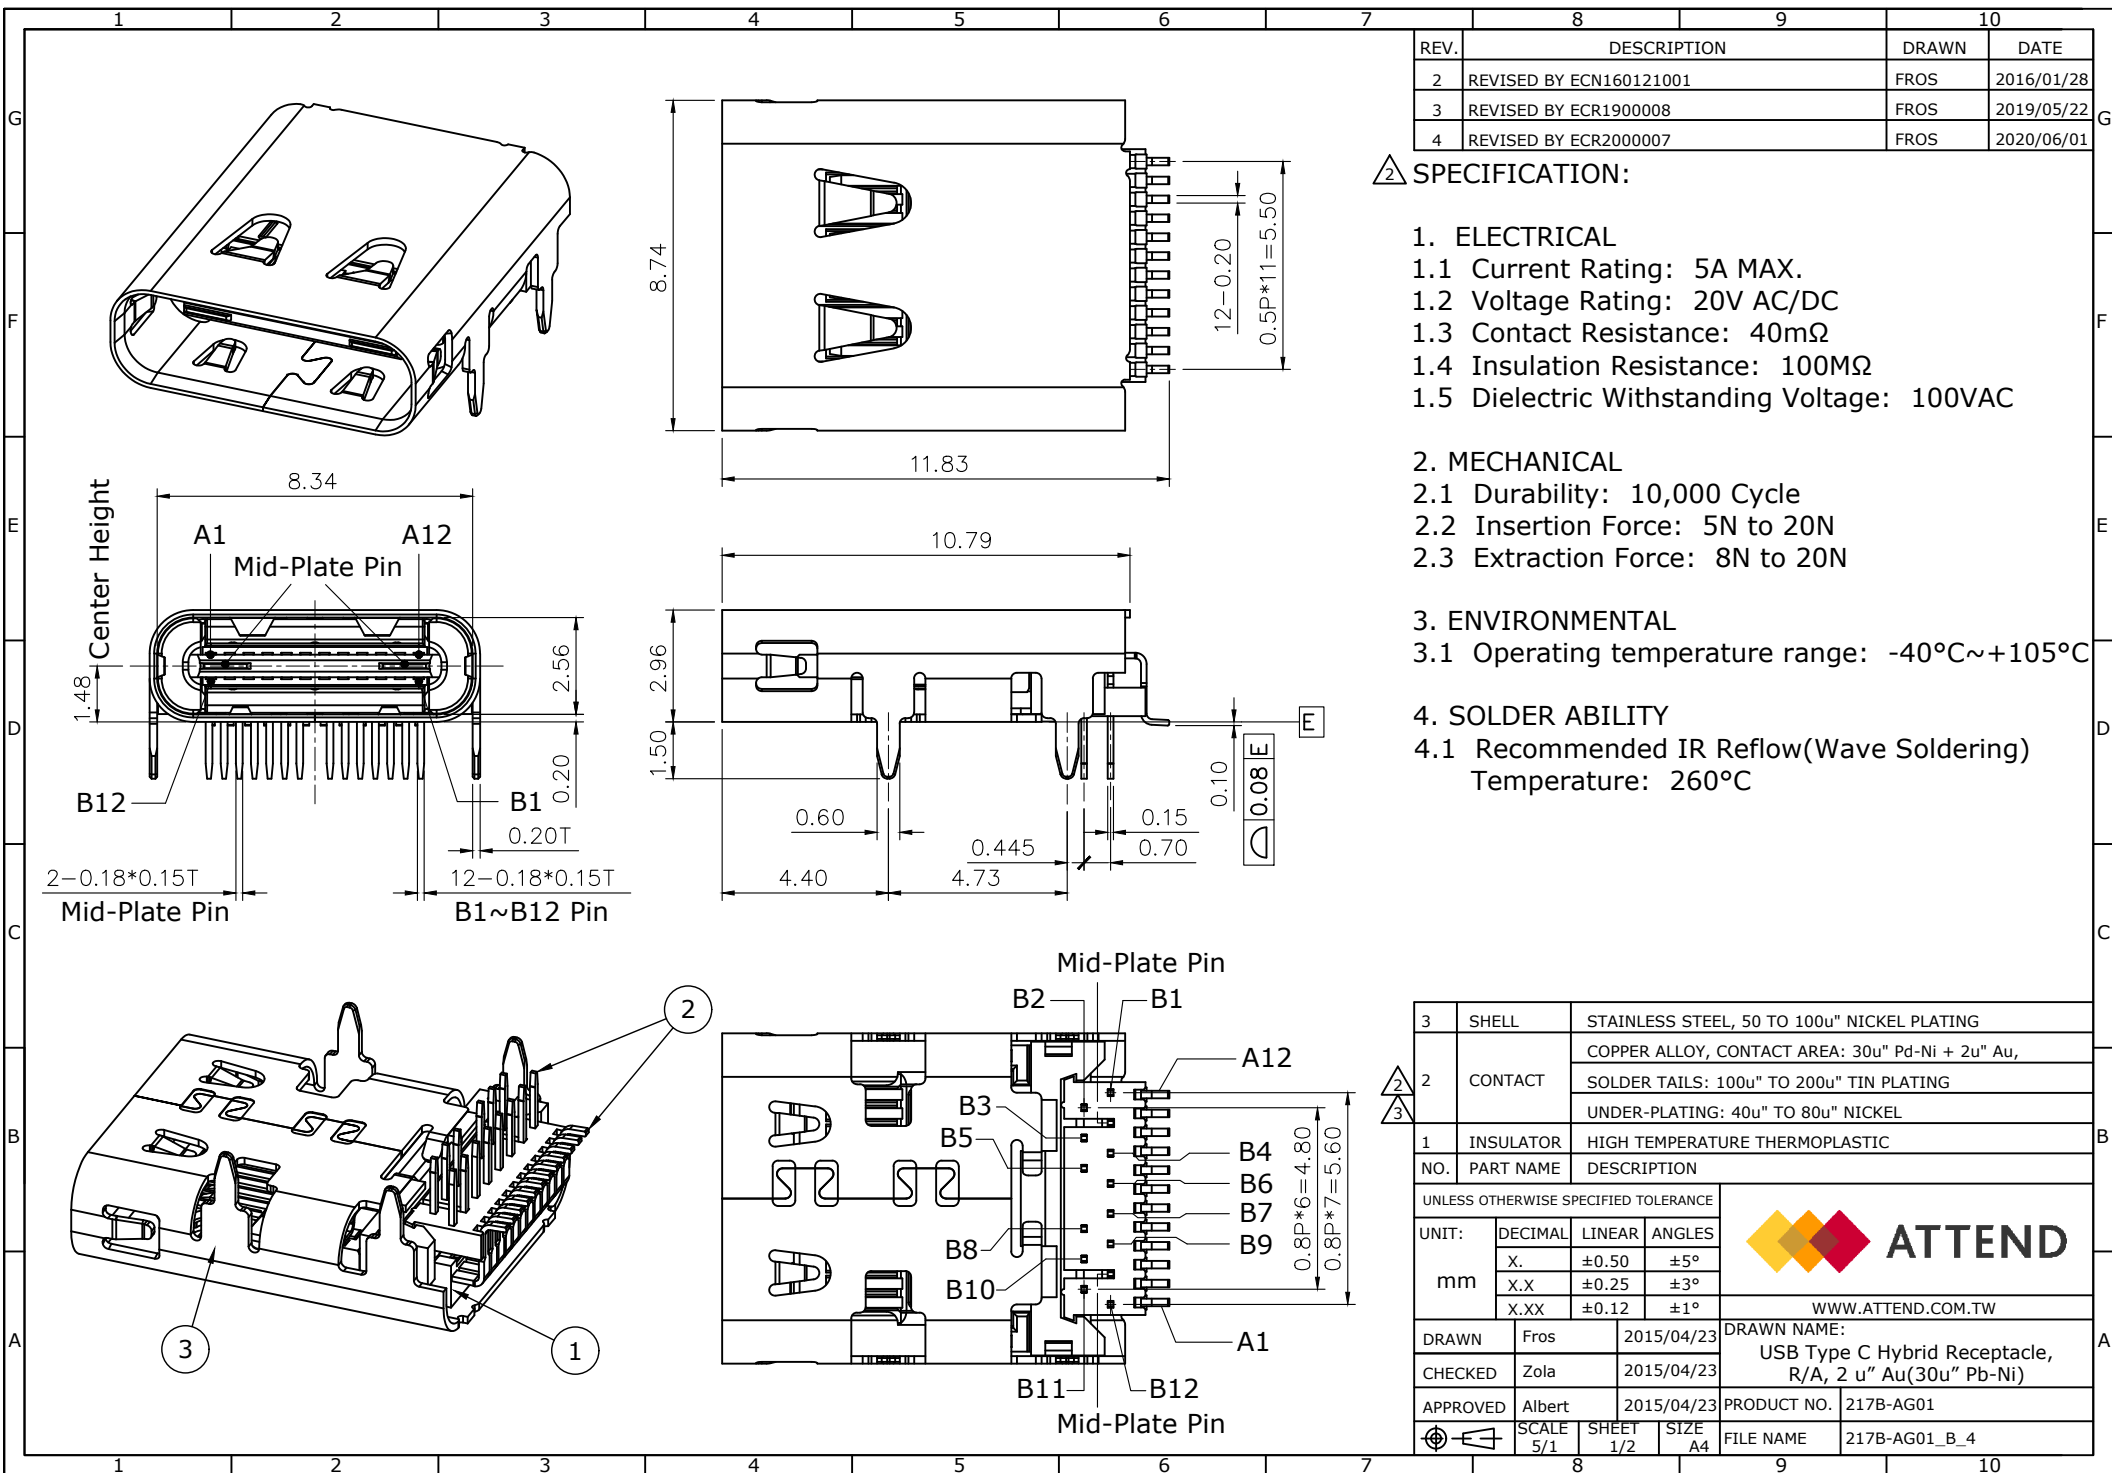

REV.	DESCRIPTION	DRAWN	DATE
2	REVISED BY ECN160121001	FROS	2016/01/28
3	REVISED BY ECR1900008	FROS	2019/05/22
4	REVISED BY ECR2000007	FROS	2020/06/01

2 SPECIFICATION:

- ELECTRICAL
 - Current Rating: 5A MAX.
 - Voltage Rating: 20V AC/DC
 - Contact Resistance: 40mΩ
 - Insulation Resistance: 100MΩ
 - Dielectric Withstanding Voltage: 100VAC
- MECHANICAL
 - Durability: 10,000 Cycle
 - Insertion Force: 5N to 20N
 - Extraction Force: 8N to 20N
- ENVIRONMENTAL
 - Operating temperature range: -40°C~+105°C
- SOLDER ABILITY
 - Recommended IR Reflow(Wave Soldering) Temperature: 260°C

3	SHELL	STAINLESS STEEL, 50 TO 100u" NICKEL PLATING	
2	CONTACT	COPPER ALLOY, CONTACT AREA: 30u" Pd-Ni + 2u" Au,	
		SOLDER TAILS: 100u" TO 200u" TIN PLATING	
		UNDER-PLATING: 40u" TO 80u" NICKEL	
1	INSULATOR	HIGH TEMPERATURE THERMOPLASTIC	
NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
mm			
		 ATTEND	
		WWW.ATTEND.COM.TW	
DRAWN	Fros	2015/04/23	DRAWN NAME: USB Type C Hybrid Receptacle, R/A, 2 u" Au(30u" Pb-Ni)
CHECKED	Zola	2015/04/23	
APPROVED	Albert	2015/04/23	
		PRODUCT NO.	217B-AG01
	SCALE 5/1	SHEET 1/2	SIZE A4
		FILE NAME	217B-AG01_B_4



WWW.ATTEND.COM.TW

