
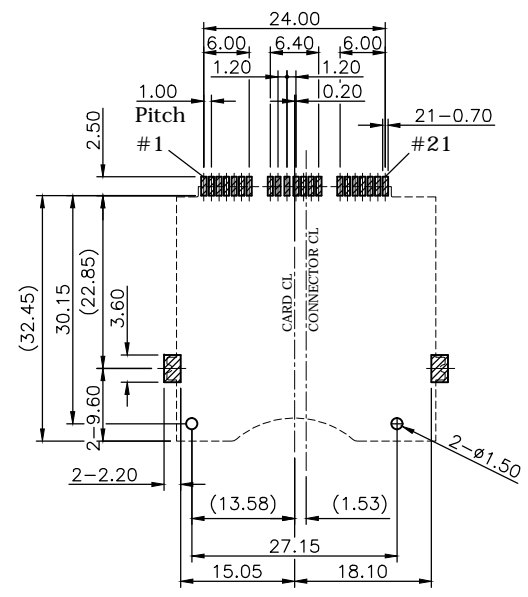
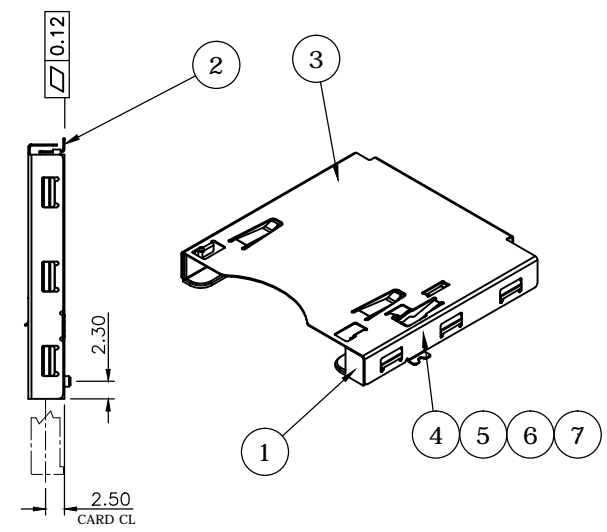


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2018/06/15

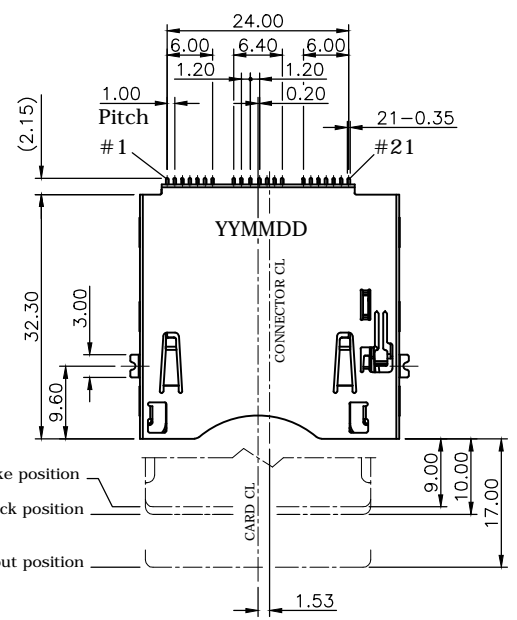



**RECOMMENDED LAYOUT(TOP VIEW)**  
**GENERAL TOLERANCE: ±0.05mm**

**SPECIFICATION:**

1. ELECTRICAL
  - 1.1 Current Rating: 0.5A
  - 1.2 Voltage Rating: 5VDC
  - 1.3 Contact Resistance: 30mΩ
  - 1.4 Insulation Resistance: 1000MΩ
  - 1.5 Dielectric Withstanding Voltage: 500VAC
2. ENVIRONMENTAL
  - 2.1 Operating temperature range: -25°C~+85°C
3. SOLDER ABILITY
  - 3.1 Recommended Reflow Temperature: 260°C

Pin NO.	SIGNAL	Pin NO.	SIGNAL	Pin NO.	SIGNAL
1	GND	8	Reserved	15	GND
2	PERn1	9	PERST#	16	PERn0
3	PERp1	10	+3.3V	17	PERp0
4	GND	11	CLKREQ#	18	GND
5	PETn1	12	INS#	19	PETn0
6	PETp1	13	REFCLK-	20	PETp0
7	Reserved	14	REFCLK+	21	GND

7	CARD LOCK	Stainless Steel
6	LINK	Stainless Steel
5	SPRING	SWP
4	SLIDER	LCP, UL94V-0, Black
3	SHELL	Stainless Steel
2	CONTACT	Phosphor Bronze, Gold plating over Nickel
1	HOUSING	LCP, UL94V-0, Black

NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES	 www.attend.com.tw	
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2018/06/15	DRAWN NAME:		
CHECKED	Tim	2018/06/15	CFexpress Type B Host Socket Push-Push Type, 15u"		
APPROVED	Ken	2018/06/15	PRODUCT NO.	101M-TE10	
	SCALE	SHEET	SIZE	FILE NAME	
	1/1	1/1	A4	101M-TE10_B_1	