





REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2018/06/15
2	ECR230726001	TIM	2023/07/26

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 0.5A
 - 1.2 Voltage Rating: 5VDC
 - 1.3 Contact Resistance: 30mΩ
 - 1.4 Insulation Resistance: 1000MΩ
 - 1.5 Dielectric Withstanding Voltage: 500VAC
2. ENVIRONMENTAL
 - 2.1 Operating temperature range: -25°C~+85°C
3. SOLDER ABILITY
 - 3.1 Recommended Reflow Temperature: 260°C

Pin NO.	SIGNAL	Pin NO.	SIGNAL	Pin NO.	SIGNAL
1	GND	8	Reserved	15	GND
2	PERn1	9	PERST#	16	PERn0
3	PERp1	10	+3.3V	17	PERp0
4	GND	11	CLKREQ#	18	GND
5	PETn1	12	INS#	19	PETn0
6	PETp1	13	REFCLK-	20	PETp0
7	Reserved	14	REFCLK+	21	GND

3	SHELL	Stainless Steel	
2	CONTACT	Phosphor Bronze, Gold plating over Nickel	
1	HOUSING	LCP, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN		Fros	2018/06/15
CHECKED		Tim	2018/06/15
APPROVED		Ken	2018/06/15
SCALE		1/1	SIZE A4
SHEET		1/1	FILE NAME
DRAWN NAME:		CFexpress Type B Host Socket Push-Pull Type, 15u"	
PRODUCT NO.		101M-TE20	
FILE NAME		101M-TE20_B_2	

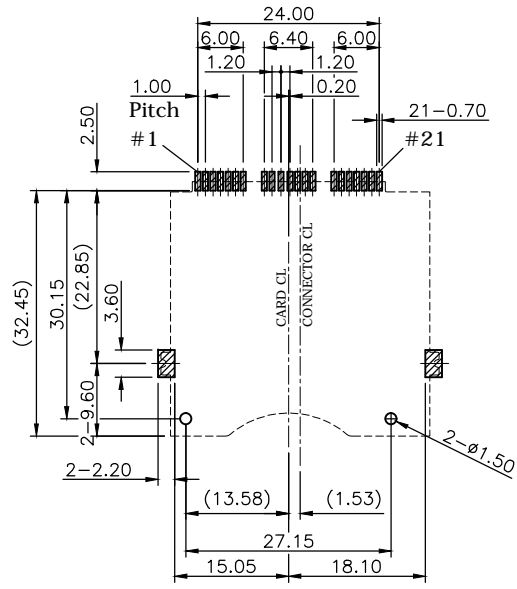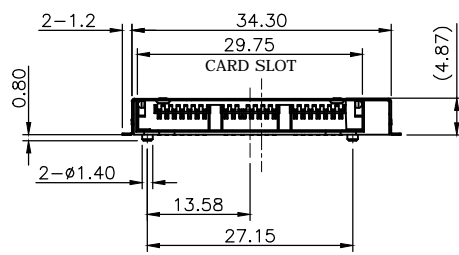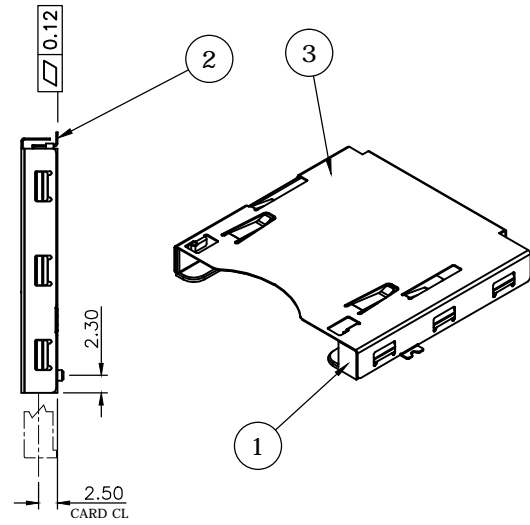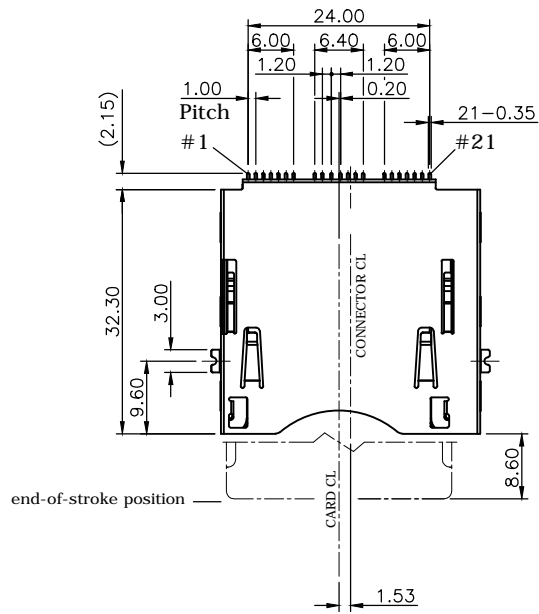

RECOMMENDED LAYOUT(TOP VIEW)
GENERAL TOLERANCE: ±0.05mm