



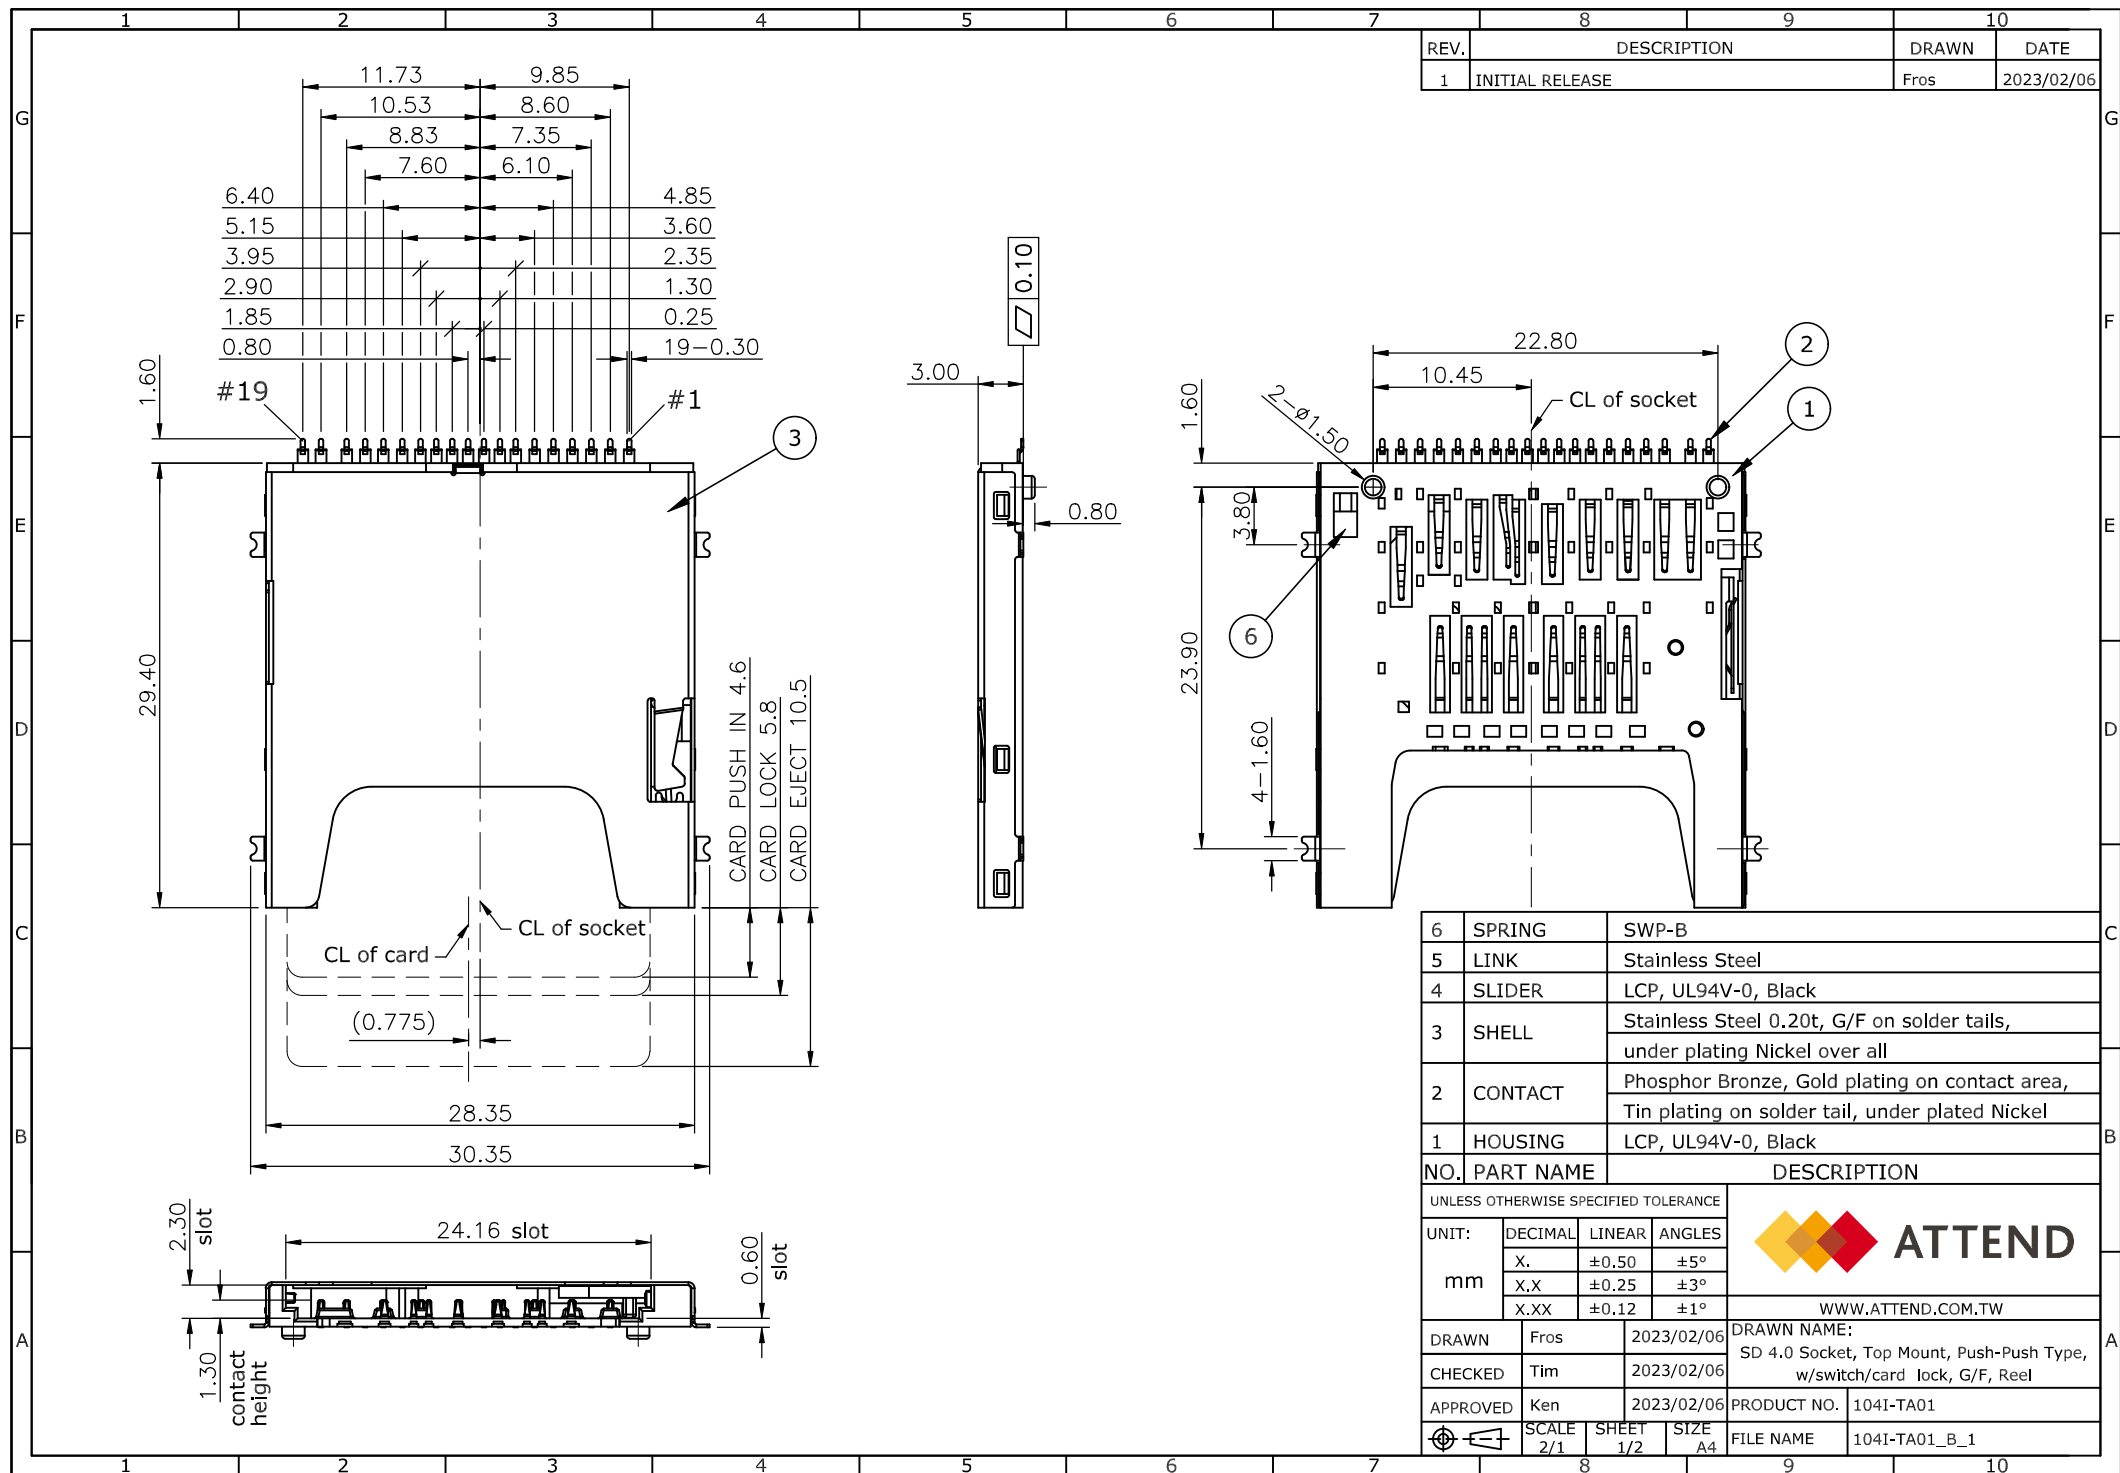

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2023/02/06

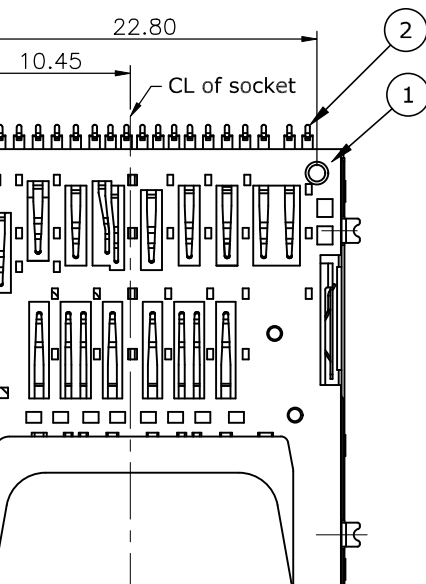

22.80

10.45

CL of socket

2

1


6	SPRING	SWP-B
5	LINK	Stainless Steel
4	SLIDER	LCP, UL94V-0, Black
3	SHELL	Stainless Steel 0.20t, G/F on solder tails, under plating Nickel over all
2	CONTACT	Phosphor Bronze, Gold plating on contact area, Tin plating on solder tail, under plated Nickel
1	HOUSING	LCP, UL94V-0, Black

NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
mm			
DRAWN Fros 2023/02/06			
CHECKED Tim 2023/02/06			
APPROVED Ken 2023/02/06			
SCALE 2/1			
SHEET 1/2			
SIZE A4			
DRAWN NAME: SD 4.0 Socket, Top Mount, Push-Push Type, w/switch/card lock, G/F, Reel			
PRODUCT NO. 104I-TA01			
FILE NAME 104I-TA01_B_1			



ATTEND

WWW.ATTEND.COM.TW



CARD OUT	CARD INSERT
#7  #8	#7  #8

WRITE PROTECTED	WRITE ENABLE
#19  GND	#19  GND

1. ELECTRICAL
 - 1.1 Current Rating: 1A MAX.
 - 1.2 Operating Voltage: 30V AC/DC
 - 1.3 Contact Resistance: 100mΩ
 - 1.4 Insulation Resistance: 1000MΩ(250VDC)
 - 1.5 Dielectric Withstanding Voltage: 500 VAC/1minute

2.1 Durability: 5,000 cycles by UHS-II SD Card

3.1 Operating temperature range: -25°C~+85°C

Socket PIN NO.	UHS-II SD PAD NO.	SD Mode	USH-II Mode
#1	10		VSS3
#2	9	DAT2	
#3	11		D0+
#4	1	CD/DAT3	
#5	12		D0-
#6	2	CMD	
#7		CD	CD
#8	3	VSS1	VSS1
#9	13		VSS4
#10	14		VDD2
#11	4	VDD	VDD1
#12	15		D1-
#13	5	CLK	
#14	16		D1+
#15	6	VSS2	VSS2
#16	17		VSS5
#17	7	DAT0	RCLK+
#18	8	DAT1	RCLK-
#19		WP	WP

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°




WWW.ATTEND.COM.TW

06	DRAWN NAME:
06	SD 4.0 Socket, Top Mount, Push-Push Type w/switch/card lock, G/F, Reel

06	PRODUCT NO.	104I-TA01
----	-------------	-----------

1	FILE NAME	104I-TA01_B_1
---	-----------	---------------

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2023/02/06

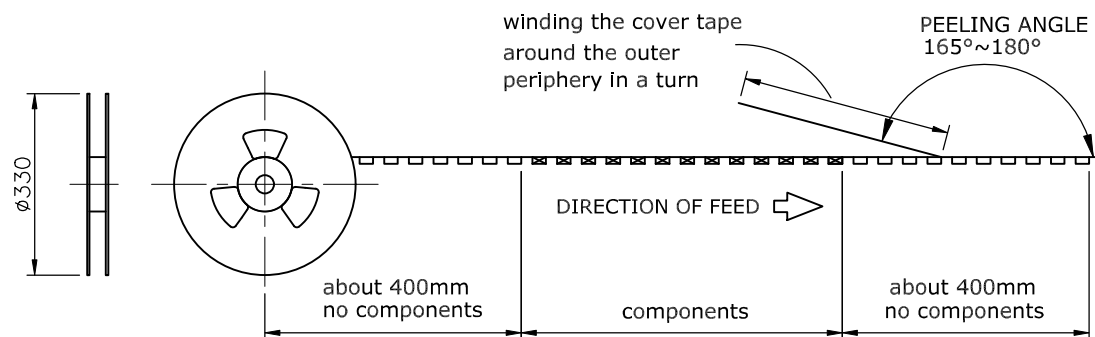



PACKAGING SPECIFICATION:

1. MATERIAL

- 1.1 Embossed Carrier Tape: PS Black
- 1.2 Top Cover Tape: PET
20-80g(Peel Speed 300mm/Minute)
- 1.3 Taping Reel: Plastic

2. PACKING

- 2.1 Quantity:
300 Piece/Reel
1800 Piece/Carton

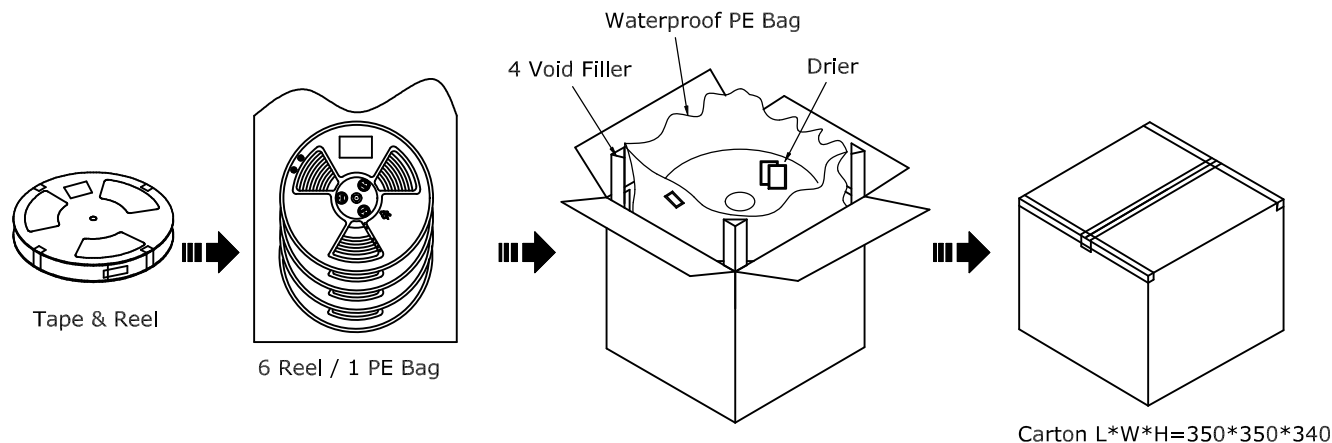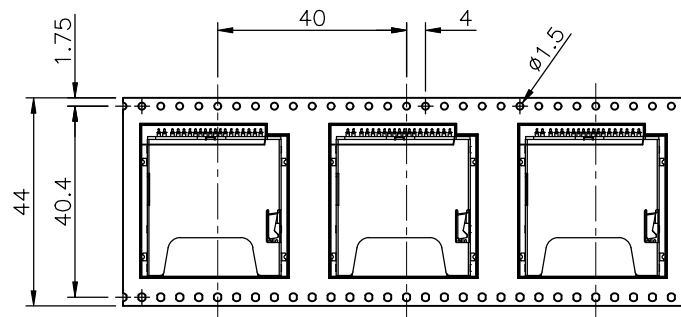

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X,X	±0.25	±3°		
	X.XX	±0.12	±1°		
				WWW.ATTEND.COM.TW	
DRAWN	Fros		2023/02/06	DRAWN NAME: SD 4.0 Socket, Top Mount, Push-Push Type w/switch/card lock, G/F, Reel	
CHECKED	Tim		2023/02/06		
APPROVED	Ken		2023/02/06	PRODUCT NO. 104I-TA01	
	SCALE 0.625	SHEET 1/1	SIZE A4	FILE NAME	104I-TA01_D_1