
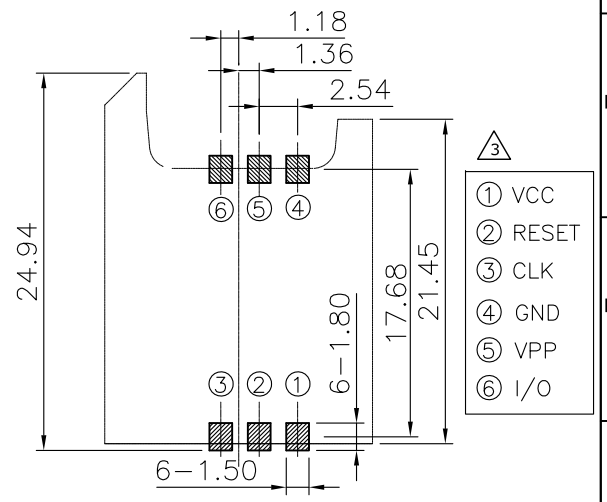



REV.	DESCRIPTION	DRAWN	DATE
4	Revised to new frame	Willis	2012/08/03
5	Revised to new frame, Modify dims	Fros	2016/06/22
6	Revised tolerance	Fros	2020/02/18

SPECIFICATION:

- 1.1 Current Rating: 1A per pin
- 1.2 Voltage Rating: 100V AC/DC
- 1.3 Contact Resistance: 30mΩ
- 1.4 Insulation Resistance: 1000MΩ
- 1.5 Dielectric Withstanding Voltage: 500VAC
- 1.6 Operating temperature range: -40°C~+85°C

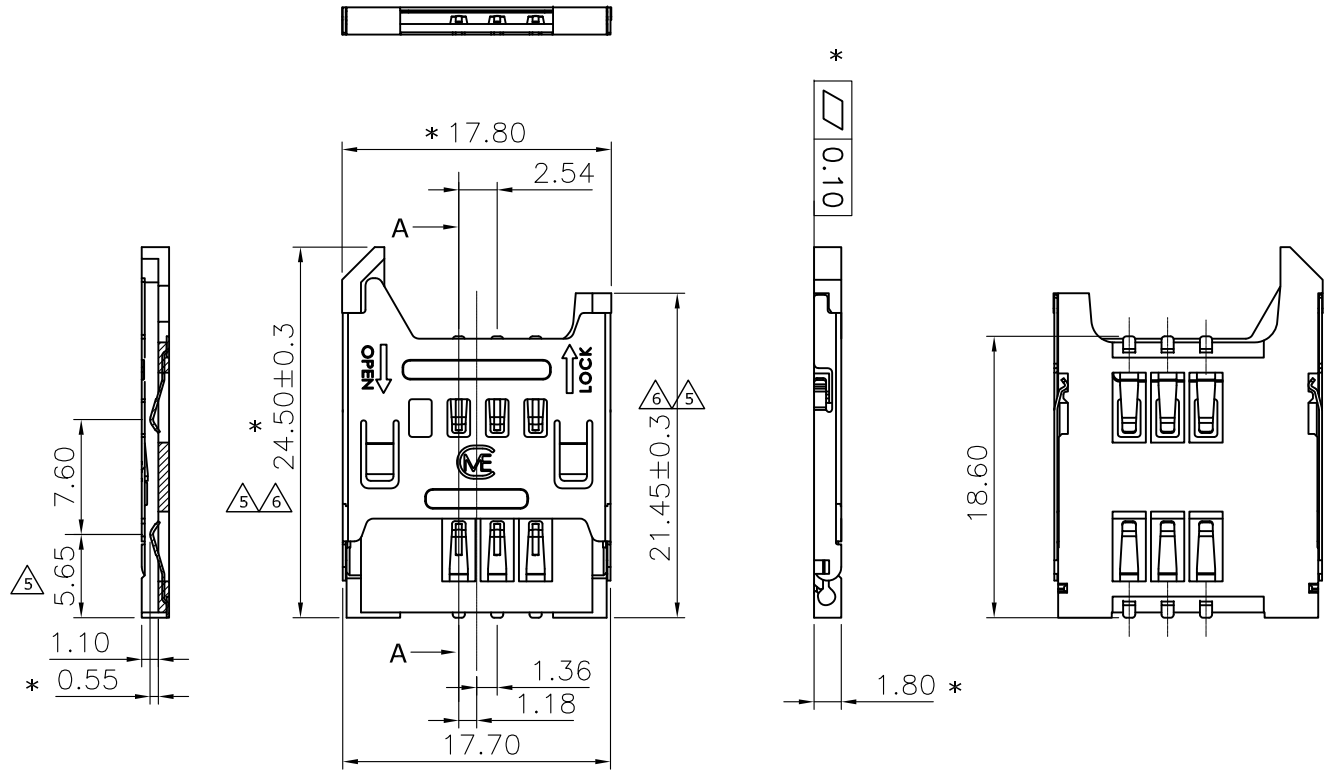

Recommended Layout (top view)
General Tolerance: ±0.05mm

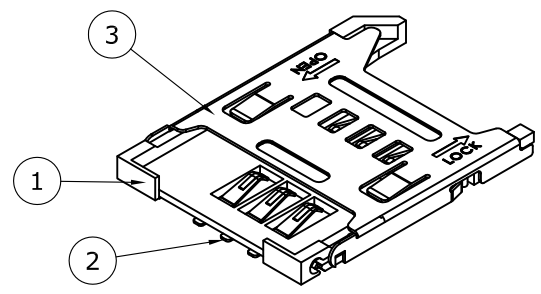

3	SHELL	Stainless Steel 0.2t	
2	CONTACT	Phosphor Bronze 0.15t, Gold plating over Nickel	
1	HOUSING	LCP, UL94V-0, Black	
NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
		WWW.ATTEND.COM.TW	
DRAWN	Willis	2008/11/19	DRAWN NAME:
CHECKED	Angel	2008/11/19	SIM Card Socket Hinge Type H=1.8 6Pin, w/o Peg, Gold Flash
APPROVED	Ken	2008/11/19	PRODUCT NO. 115G-AAAA-R
SCALE	SHEET	SIZE	FILE NAME
2/1	1/1	A4	115G-AAAA-R_B_6

