



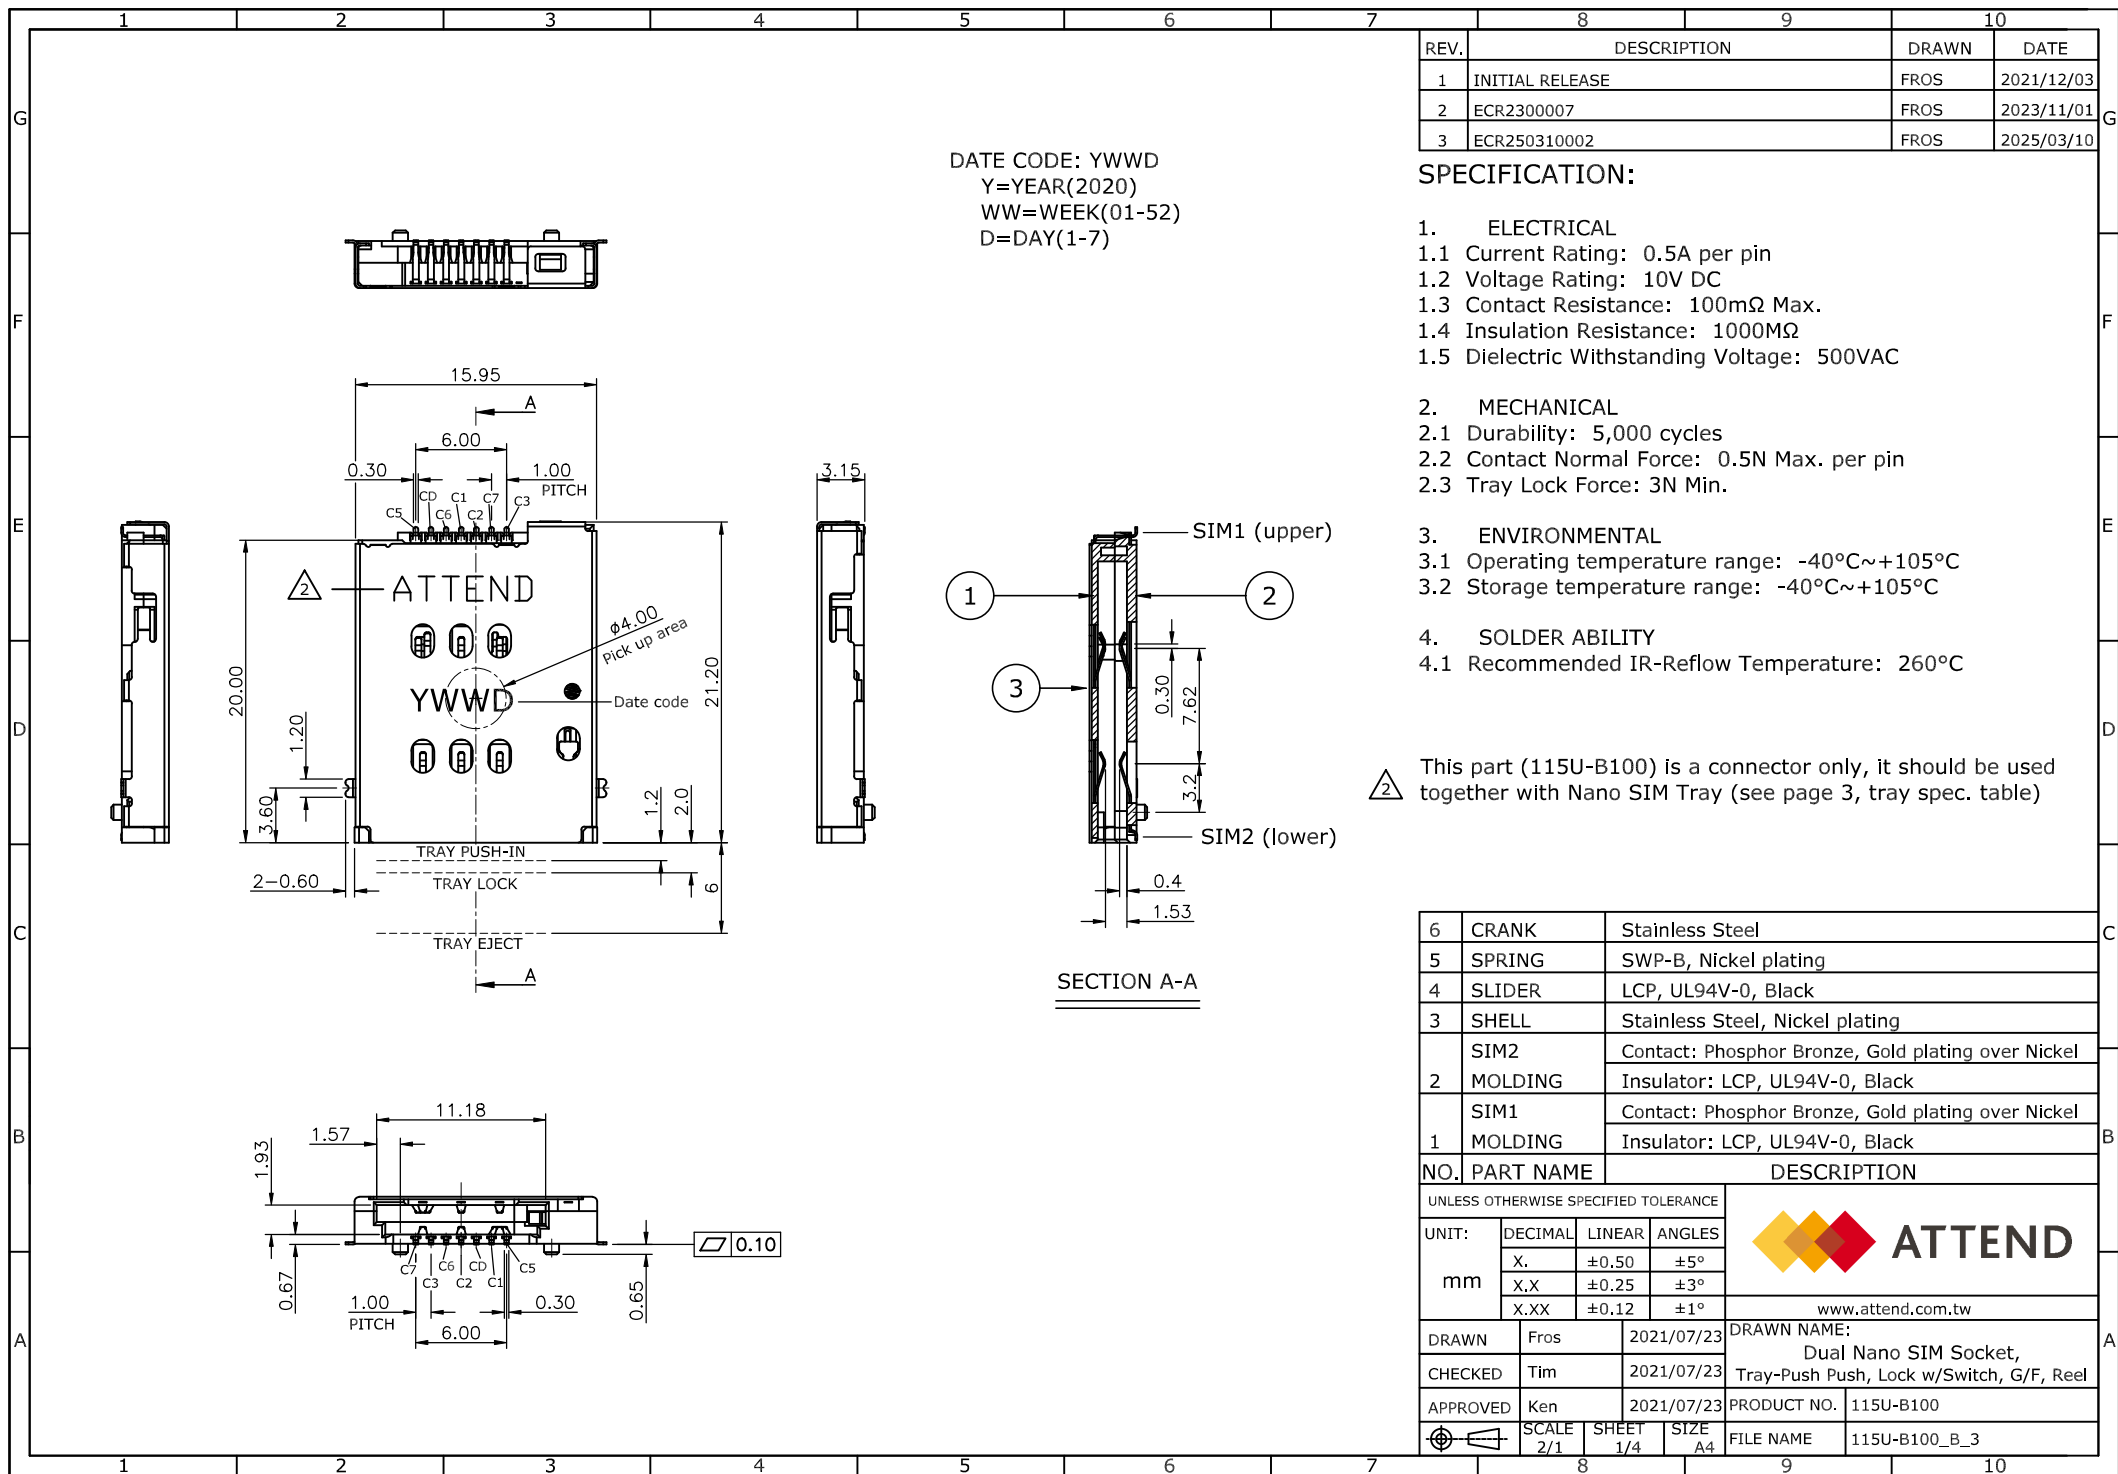

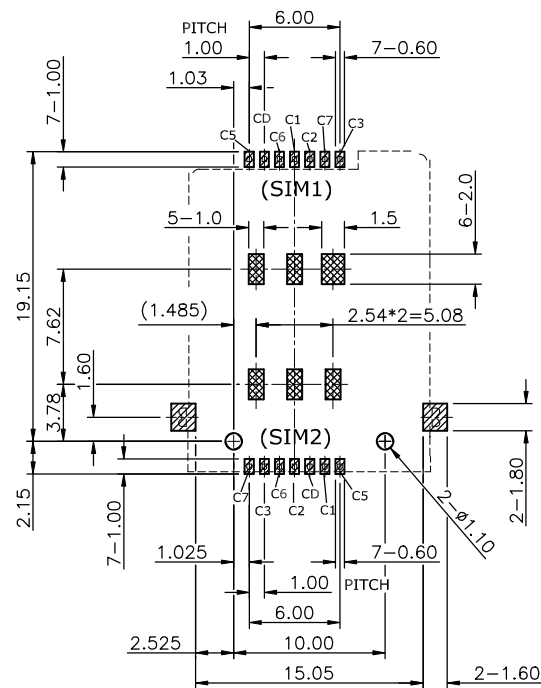


Card	Pin NO.	Pin Name
SIM 1 & SIM 2	C 1	VCC
	C 2	RST
	C 3	CLK
	C 5	GND
	C 6	VPP
	C 7	I/O
	CD	Card Detect Switch

 SOLDER PAD

 KEEP OUT AREA


RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.05\text{mm}$

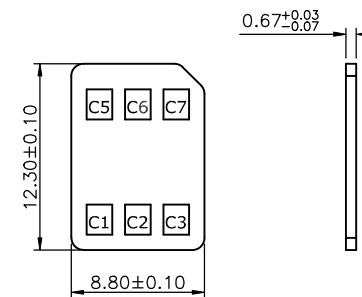


nano SIM dimensions

Card Detect Circuit: (Normal OPEN)


1. Tray with card

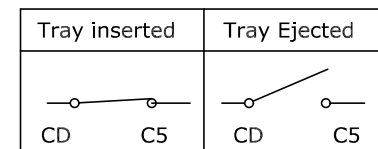

- ## 2. Tray without card

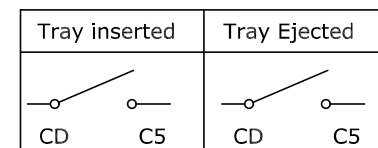

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT: mm	DECIMAL	LINEAR	ANGLES			www.attend.com.tw
	X,	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN		Fros	2021/07/23	DRAWN NAME: Dual Nano SIM Socket, Tray-Push Push, Lock w/Switch, G/F, Ree		
CHECKED		Tim	2021/07/23			
APPROVED		Ken	2021/07/23	PRODUCT NO.	115U-B100	
		SCALE 2/1	SHEET 2/4	SIZE A4	FILE NAME 115U-B100_B_3	

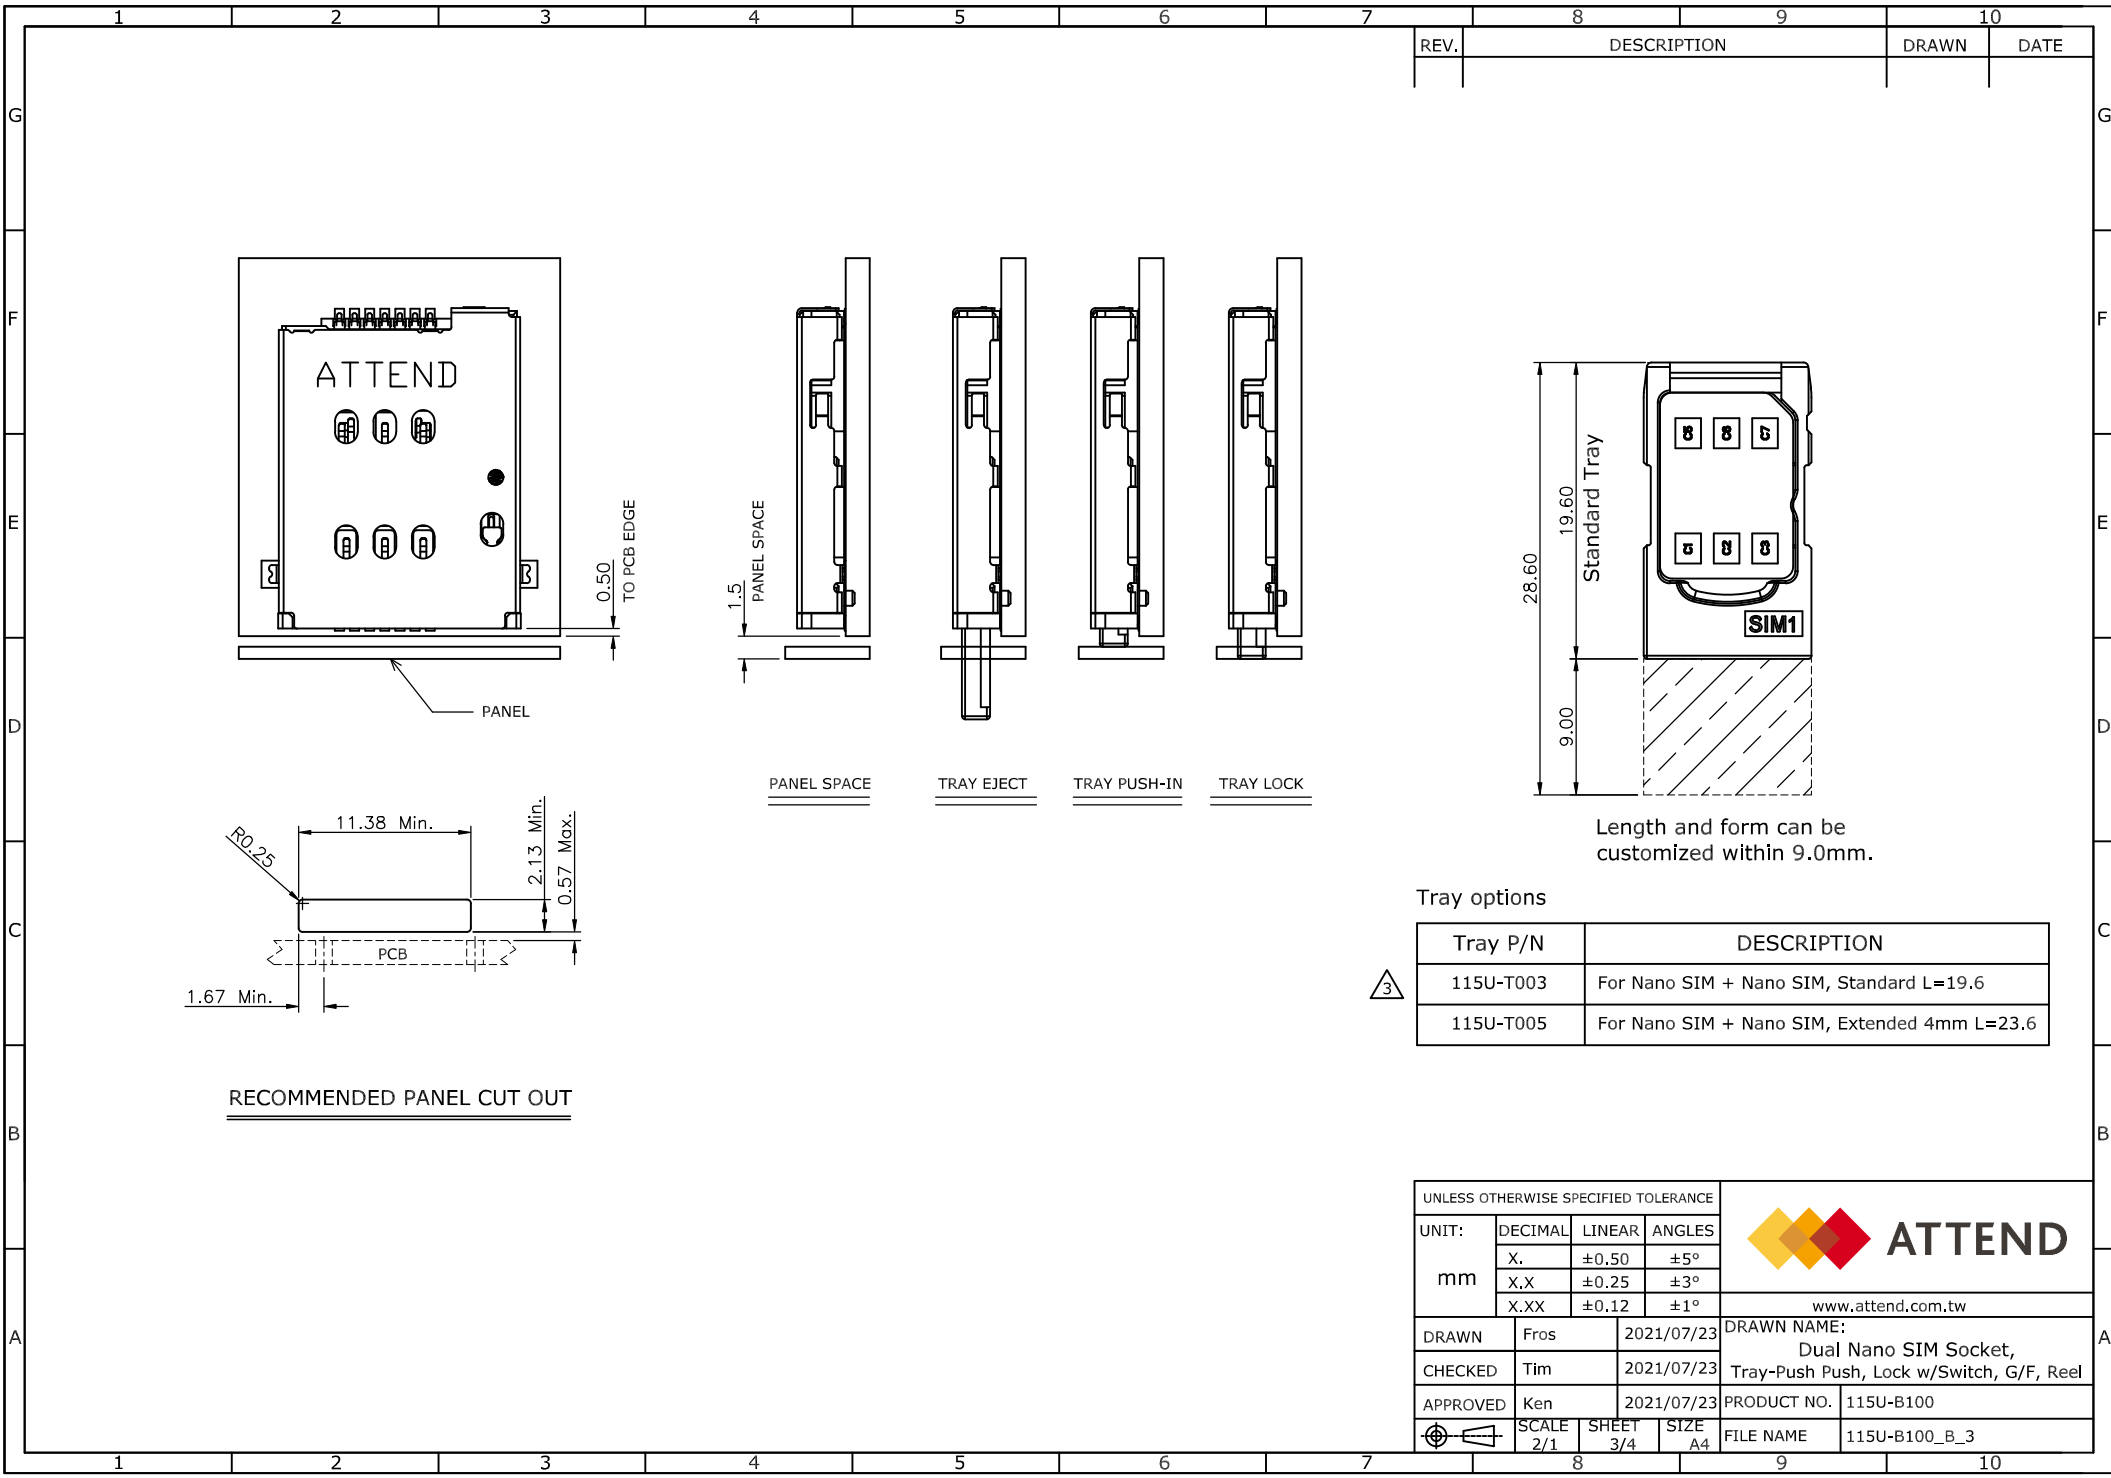

REV.	DESCRIPTION	DRAWN	DATE

Length and form can be customized within 9.0mm.

Tray options



Tray P/N	DESCRIPTION
115U-T003	For Nano SIM + Nano SIM, Standard L=19.6
115U-T005	For Nano SIM + Nano SIM, Extended 4mm L=23.6

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND			
UNIT: mm	DECIMAL	LINEAR	ANGLES			www.attend.com.tw	
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
DRAWN	Fros	2021/07/23	DRAWN NAME: Dual Nano SIM Socket, Tray-Push Push, Lock w/Switch, G/F, Reel				
CHECKED	Tim	2021/07/23	PRODUCT NO. 115U-B100				
APPROVED	Ken	2021/07/23	FILE NAME 115U-B100_B_3				
	SCALE 2/1	SHEET 3/4	SIZE A4				

REV.	DESCRIPTION	DRAWN	DATE



Nano SIM card assembly and disassembly:

ASSEMBLY

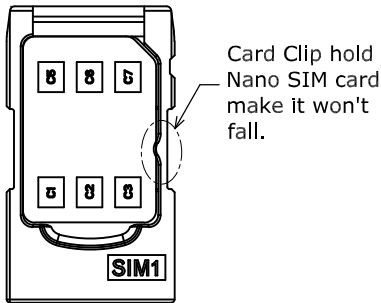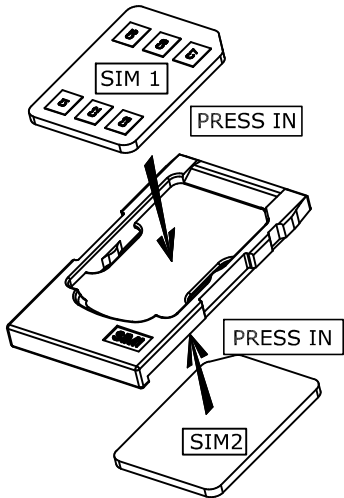

SIM1


DISASSEMBLY

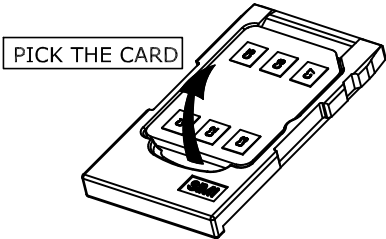

SIM2

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				www.attend.com.tw	
DRAWN	Fros	2021/07/23	DRAWN NAME: Dual Nano SIM Socket, Tray-Push Push, Lock w/Switch, G/F, Reel		
CHECKED	Tim	2021/07/23			
APPROVED	Ken	2021/07/23	PRODUCT NO.	115U-B100	
	SCALE 2/1	SHEET 4/4	SIZE A4	FILE NAME	115U-B100_B_3

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2021/07/23

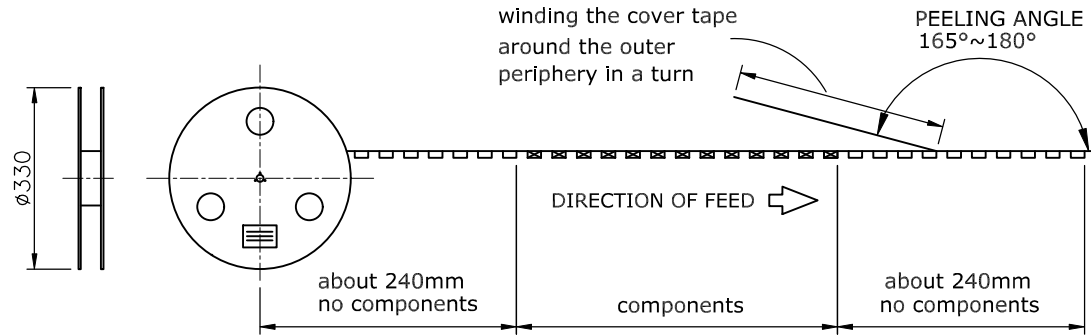



PACKAGING SPECIFICATION:

1. MATERIAL

- 1.1 Embossed Carrier Tape: PS Black
- 1.2 Top Cover Tape: PET
20-80g(Peel Speed 300mm/Minute)
- 1.3 Taping Reel: Paper

2. PACKING

- 2.1 Quantity:
550 Piece/Reel
3300 Piece/Outer Carton

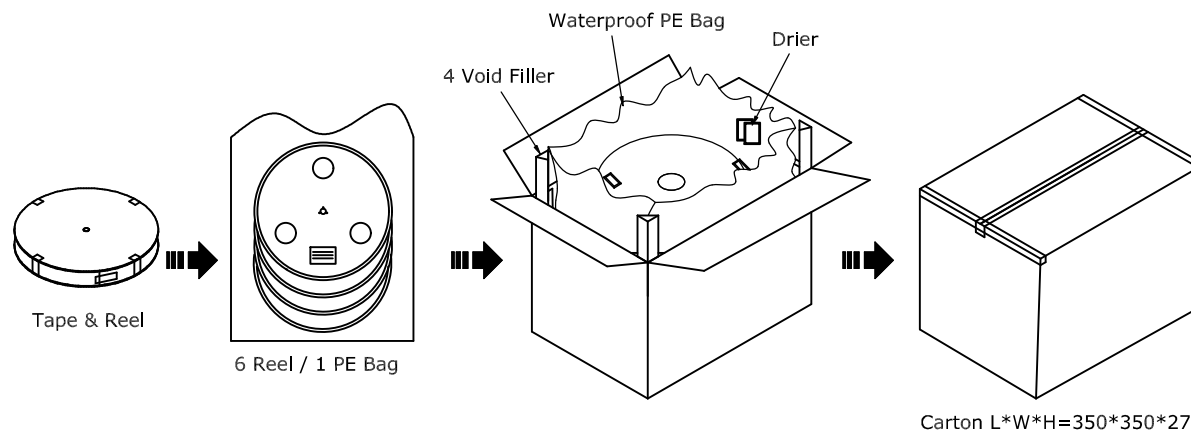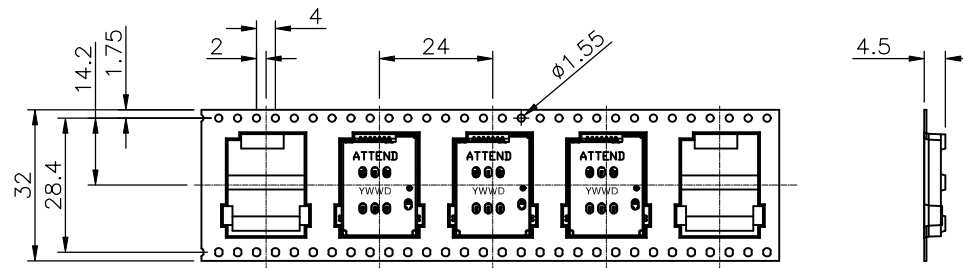

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X,X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN		Fros	2021/07/23	DRAWN NAME: Dual Nano SIM Socket, Tray-Push Push, Lock w/Switch, G/F, Reel	
CHECKED		Tim	2021/07/23		
APPROVED		Ken	2021/07/23	PRODUCT NO.	115U-B100
	SCALE N/A	SHEET 1/1	SIZE A4	FILE NAME	115U-B100_D_1