



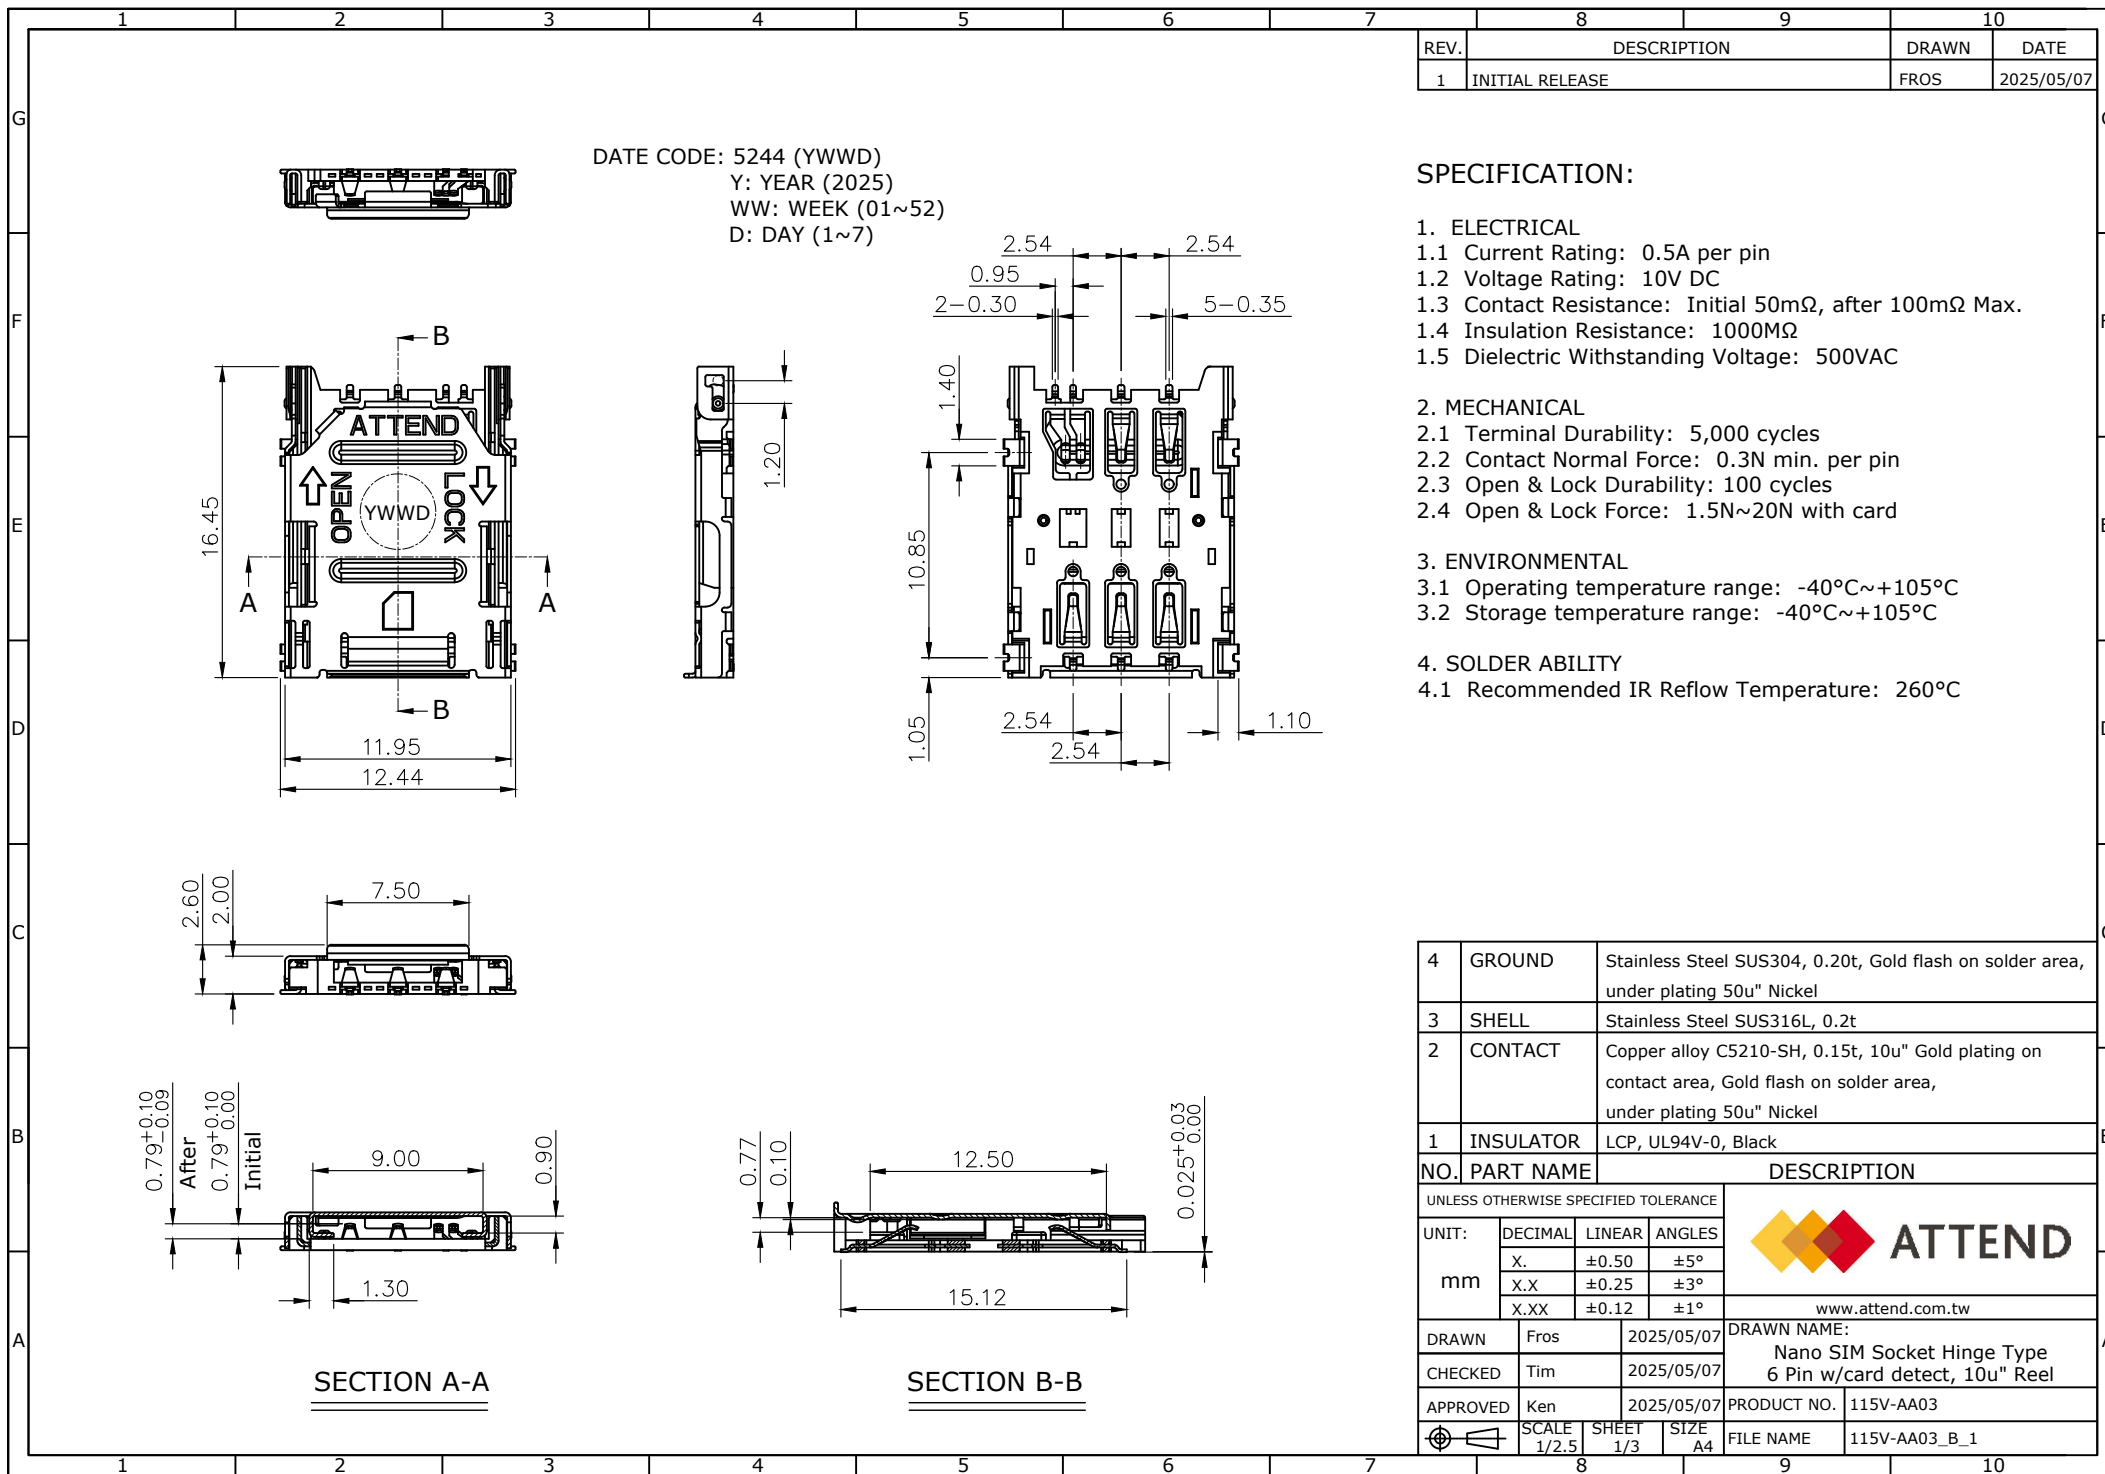

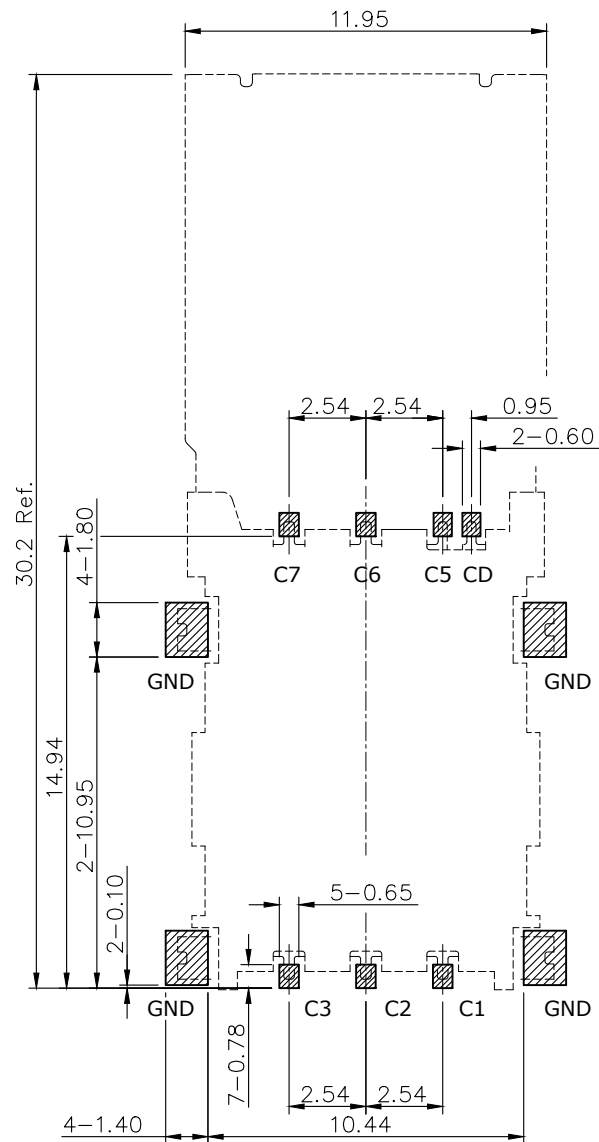


Recommended Layout (top view)
General Tolerance: $\pm 0.05\text{mm}$

REV.	DESCRIPTION	DRAWN	DATE
------	-------------	-------	------

Terminal NO.	Pin Name
C 1	VCC
C 2	RST
C 3	CLK
C 5	GND
C 6	VPP
C 7	I/O
CD	SWITCH

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2025/05/07	DRAWN NAME: Nano SIM Socket Hinge Type 6 Pin w/card detect, 10u" Reel		
CHECKED	Tim	2025/05/07			
APPROVED	Ken	2025/05/07	PRODUCT NO.	115V-AA03	
	SCALE 1/4	SHEET 2/3	SIZE A4	FILE NAME	115V-AA03_B_1

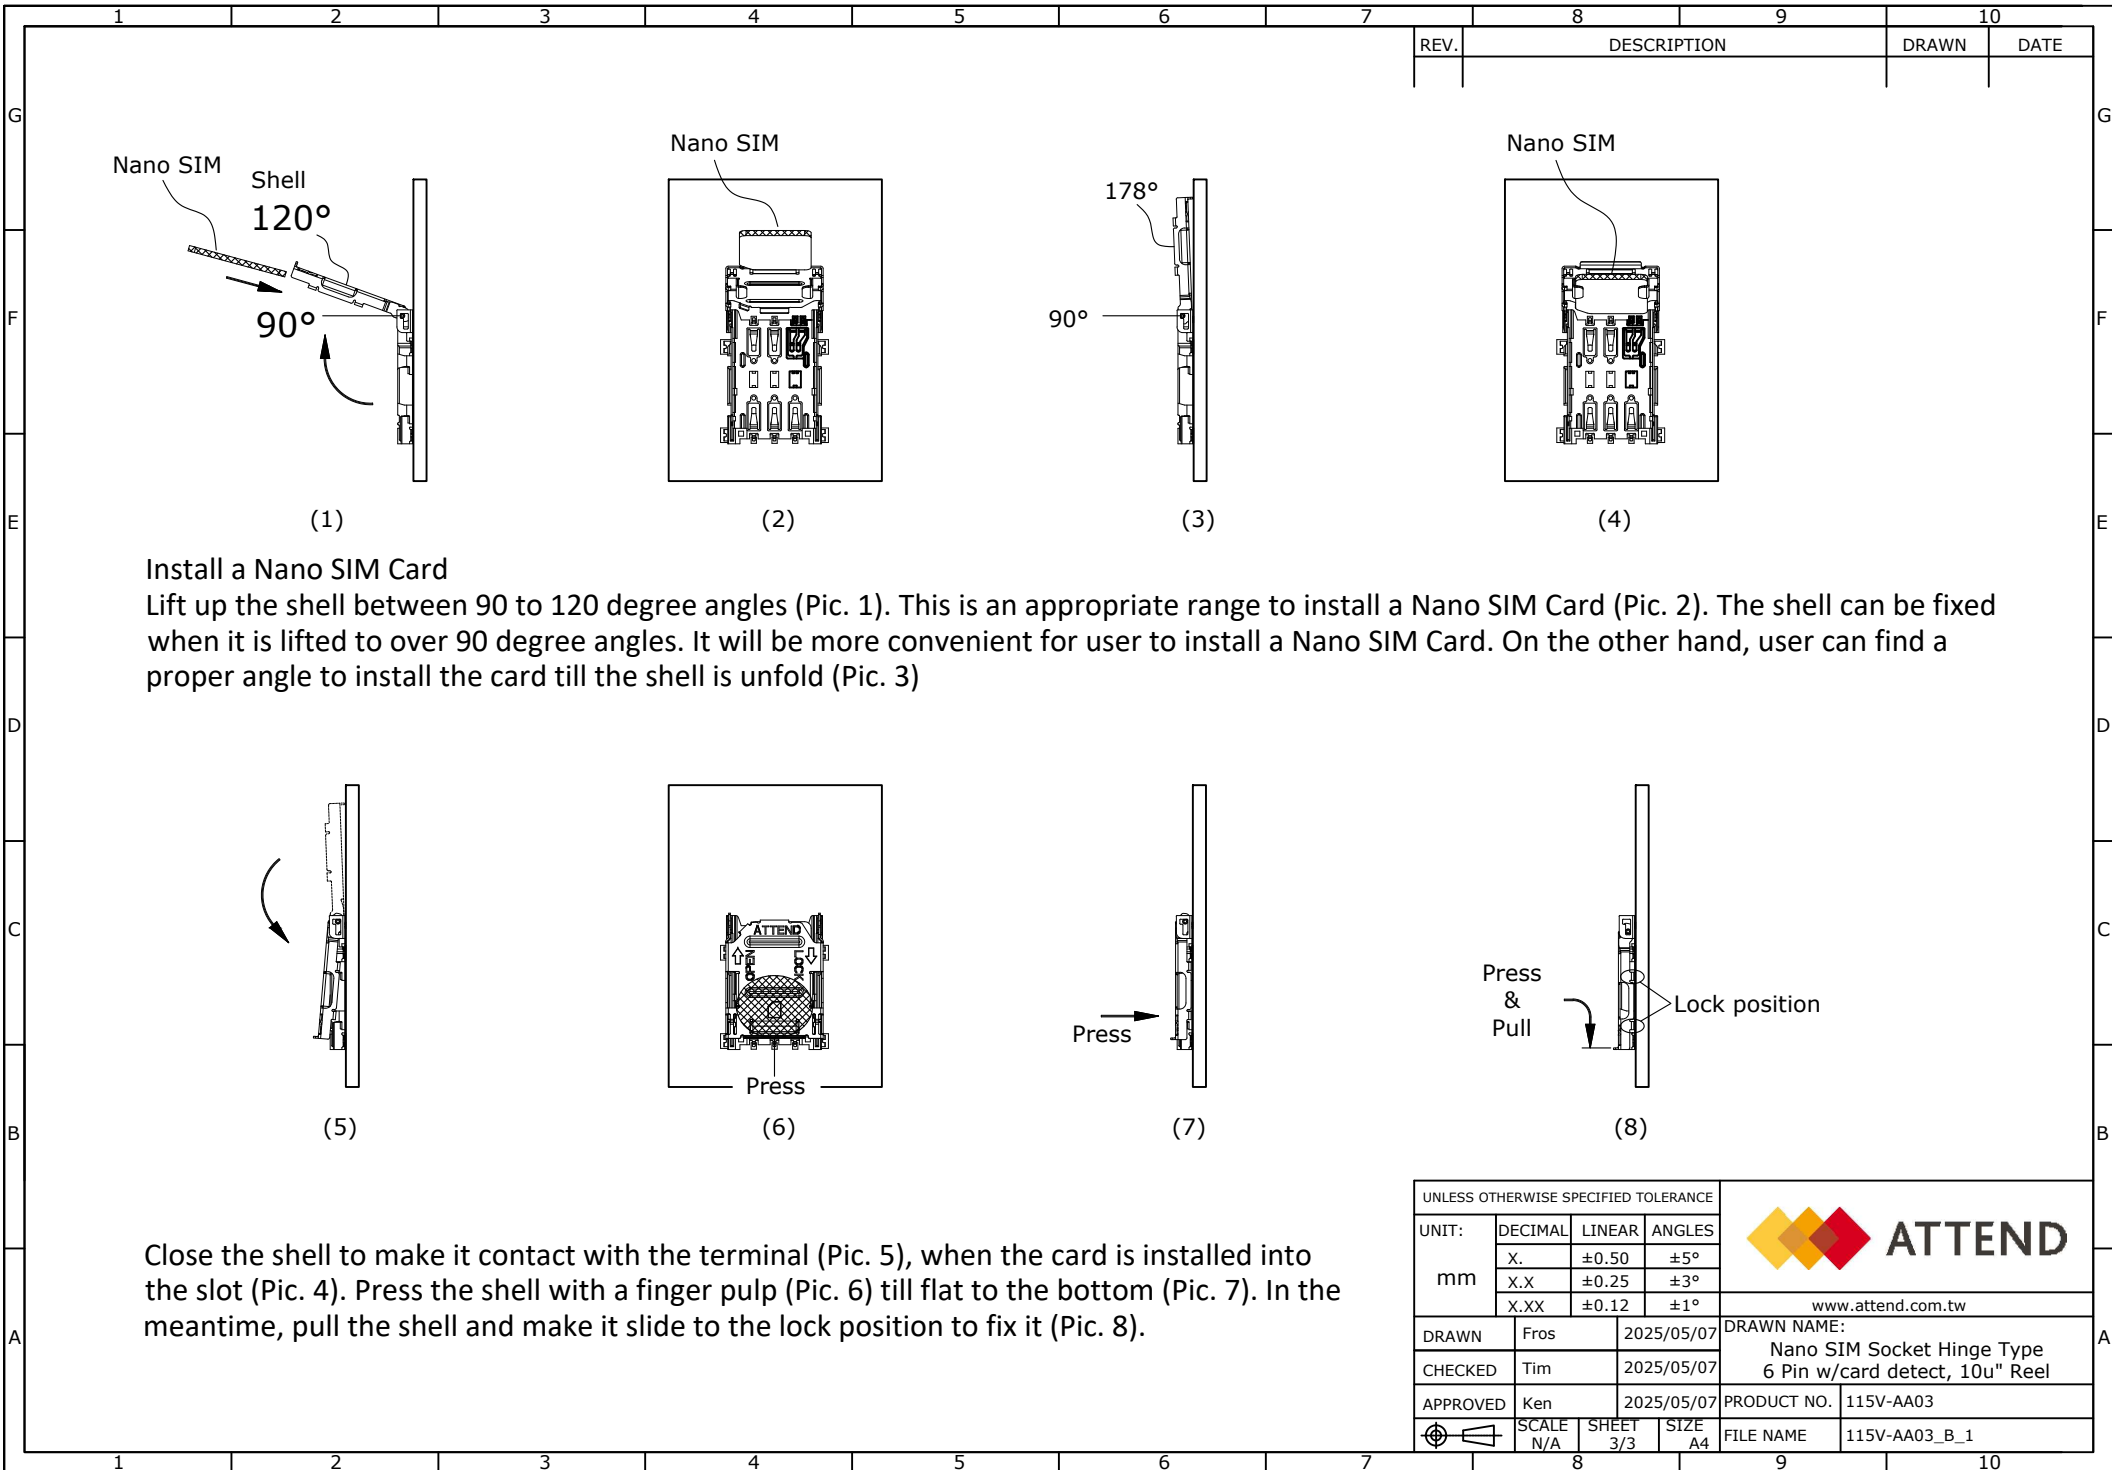

REV.	DESCRIPTION	DRAWN	DATE

Install a Nano SIM Card

Lift up the shell between 90 to 120 degree angles (Pic. 1). This is an appropriate range to install a Nano SIM Card (Pic. 2). The shell can be fixed when it is lifted to over 90 degree angles. It will be more convenient for user to install a Nano SIM Card. On the other hand, user can find a proper angle to install the card till the shell is unfold (Pic. 3)

Close the shell to make it contact with the terminal (Pic. 5), when the card is installed into the slot (Pic. 4). Press the shell with a finger pulp (Pic. 6) till flat to the bottom (Pic. 7). In the meantime, pull the shell and make it slide to the lock position to fix it (Pic. 8).

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES				
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
mm				www.attend.com.tw			
DRAWN	Fros		2025/05/07	DRAWN NAME: Nano SIM Socket Hinge Type 6 Pin w/card detect, 10u" Reel			
CHECKED	Tim		2025/05/07				
APPROVED	Ken		2025/05/07	PRODUCT NO.	115V-AA03		
	SCALE N/A	SHEET 3/3	SIZE A4	FILE NAME	115V-AA03_B_1		

