


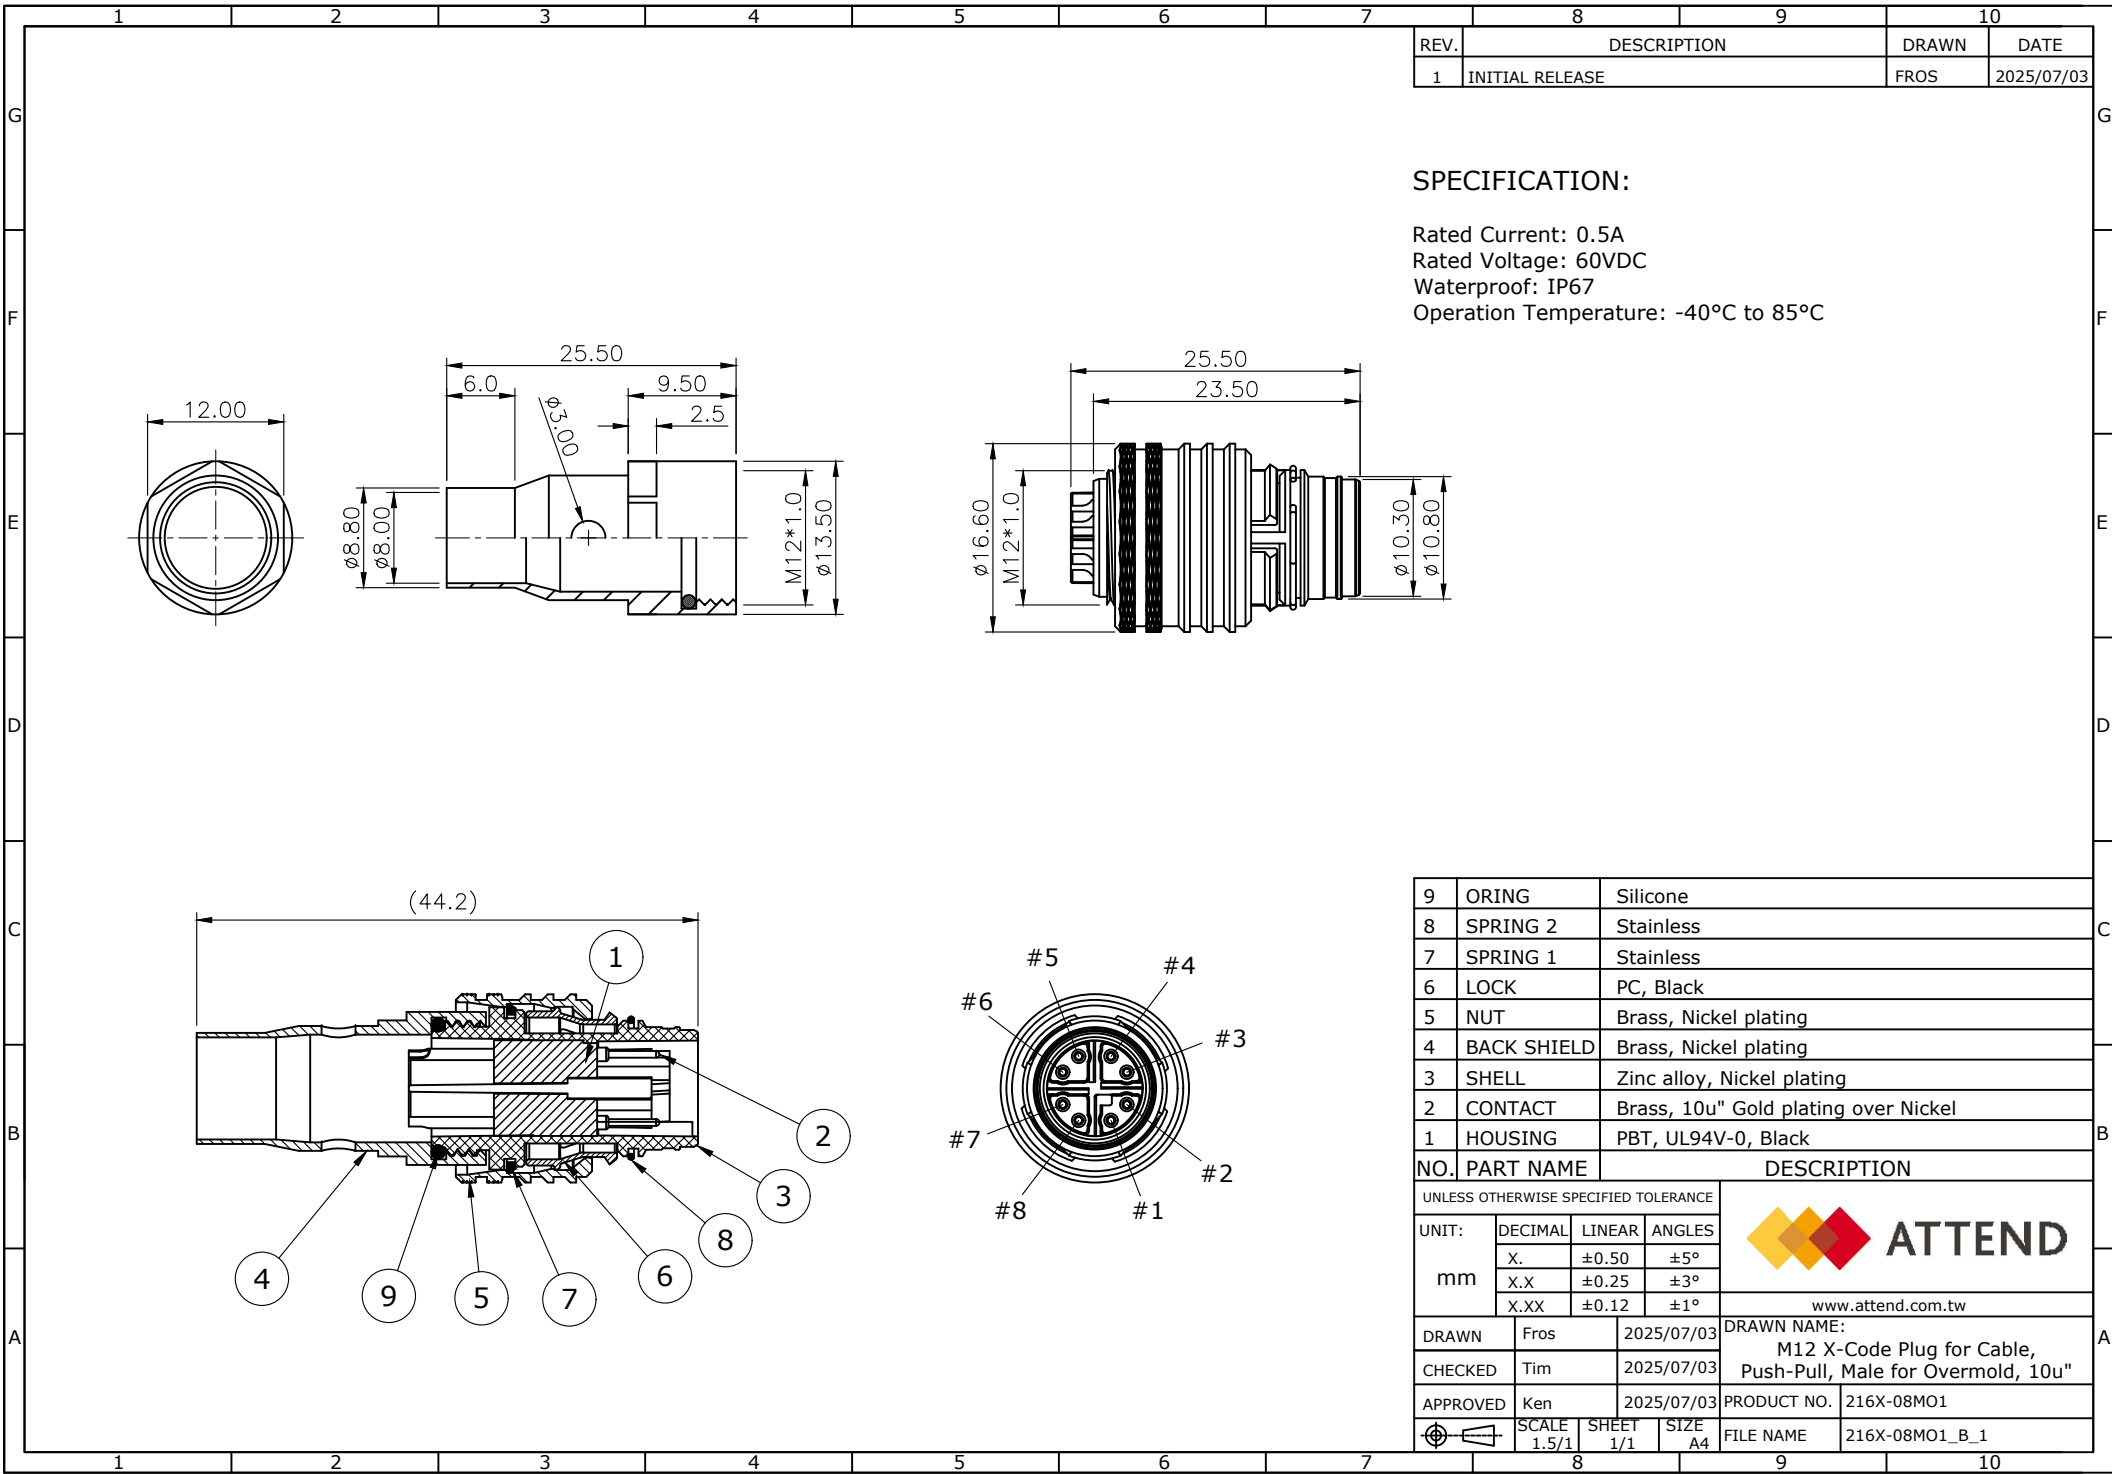

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/07/03

SPECIFICATION:

Rated Current: 0.5A
Rated Voltage: 60VDC
Waterproof: IP67
Operation Temperature: -40°C to 85°C

9	ORING	Silicone		
8	SPRING 2	Stainless		
7	SPRING 1	Stainless		
6	LOCK	PC, Black		
5	NUT	Brass, Nickel plating		
4	BACK SHIELD	Brass, Nickel plating		
3	SHELL	Zinc alloy, Nickel plating		
2	CONTACT	Brass, 10u" Gold plating over Nickel		
1	HOUSING	PBT, UL94V-0, Black		
NO. PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT: mm	DECIMAL	LINEAR	ANGLES	 ATTEND www.attend.com.tw
	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
DRAWN	Fros	2025/07/03	DRAWN NAME: M12 X-Code Plug for Cable, Push-Pull, Male for Overmold, 10u"	
CHECKED	Tim	2025/07/03		
APPROVED	Ken	2025/07/03	PRODUCT NO. 216X-08M01	
	SCALE 1.5/1	SHEET 1/1	SIZE A4	FILE NAME 216X-08M01_B_1