

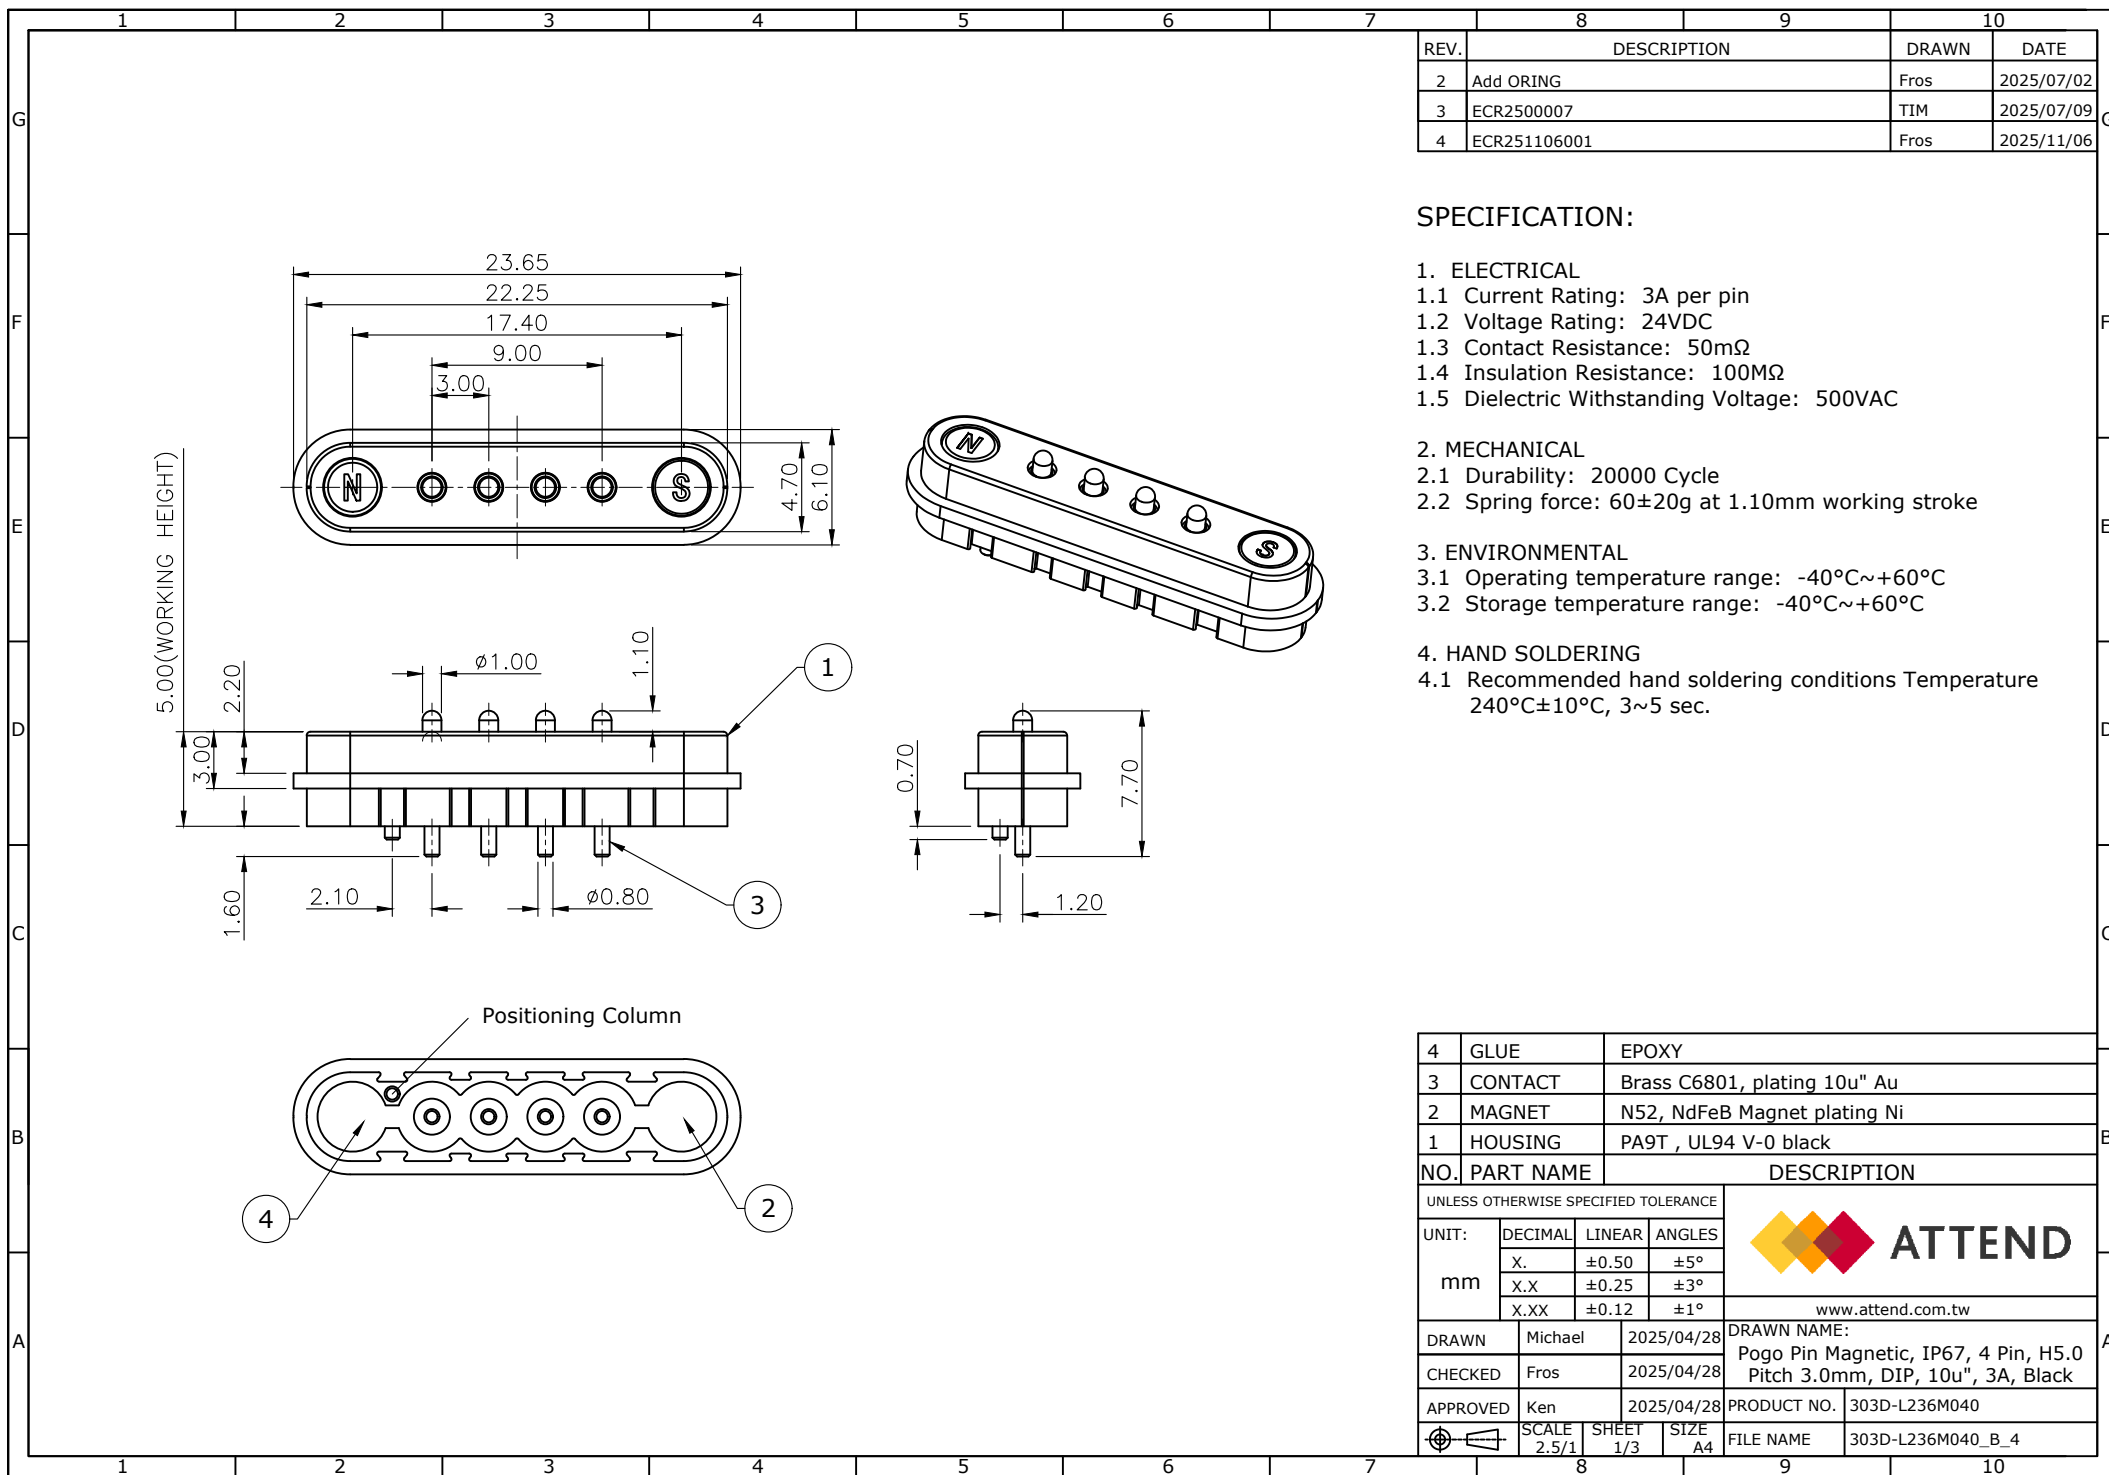
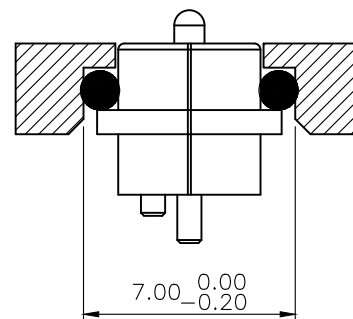


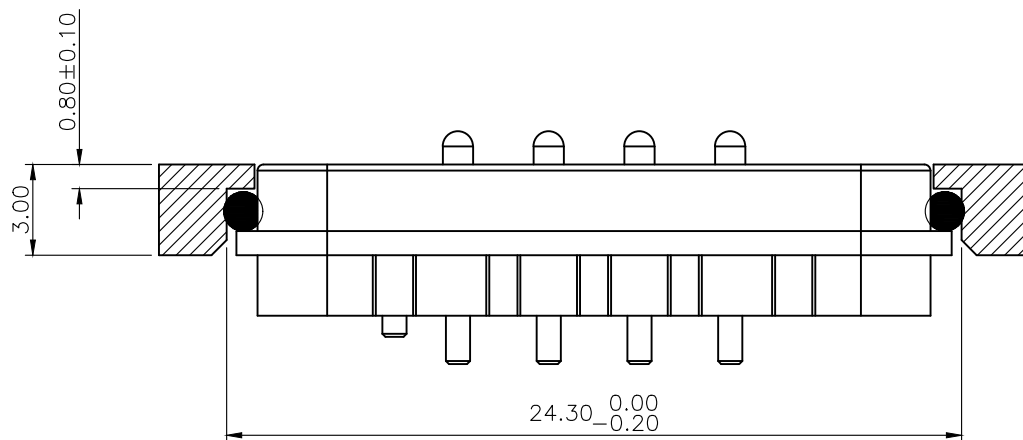

Note 1:

ORING P/N: 303-0012



(The connector number does not include the O-ring, please order it separately if you want ORING)

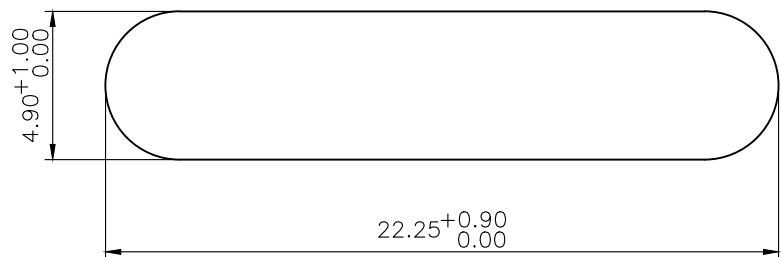

Recommended Panel Cut


UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
mm				www.attend.com.tw	
DRAWN		Michael	2025/04/28	DRAWN NAME: Pogo Pin Magnetic, IP67, 4 Pin, H5.0 Pitch 3.0mm, DIP, 10u", 3A, Black	
CHECKED		Fros	2025/04/28		
APPROVED		Ken	2025/04/28	PRODUCT NO.	303D-L236M040
		SCALE 2.5/1	SHEET 2/3	SIZE A4	FILE NAME 303D-L236M040_B_4

1. Use PCB for soldering

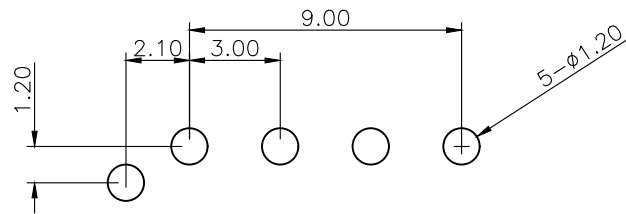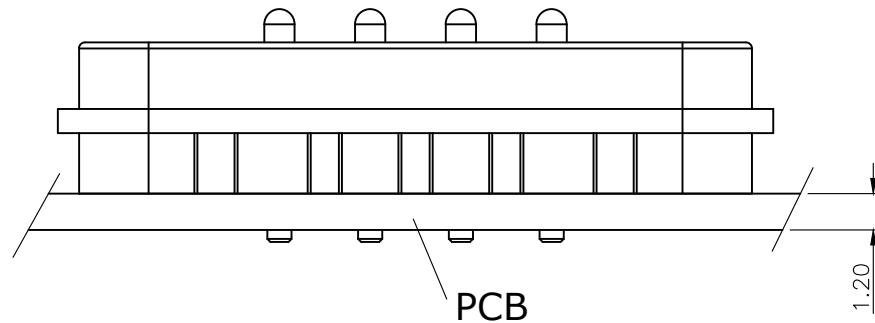

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE: ± 0.05

2. Using wire for soldering

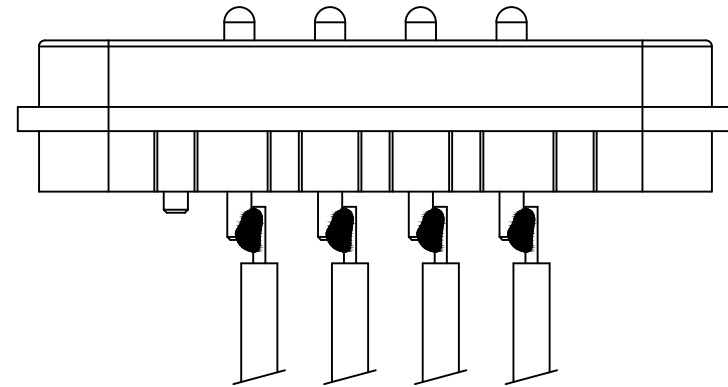

UNLESS OTHERWISE SPECIFIED TOLERANCE				ATTEND			
UNIT: mm	DECIMAL	LINEAR	ANGLES				
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
				www.attend.com.tw			
DRAWN	Michael	2025/04/28	DRAWN NAME: Pogo Pin Magnetic, IP67, 4 Pin, H5.0 Pitch 3.0mm, DIP, 10u", 3A, Black				
CHECKED	Fros	2025/04/28					
APPROVED	Ken	2025/04/28	PRODUCT NO.	303D-L236M040			
	SCALE 2.5/1	SHEET 3/3	SIZE A4	FILE NAME	303D-L236M040_B_4		