
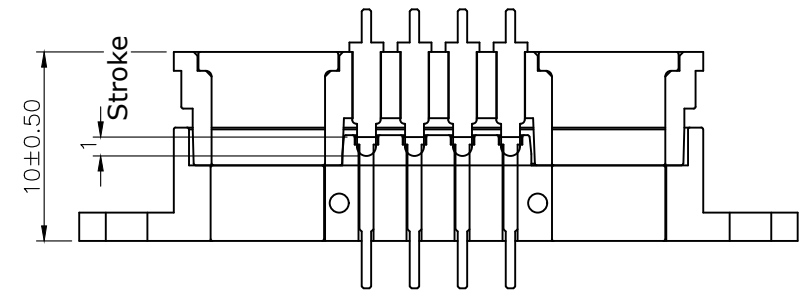

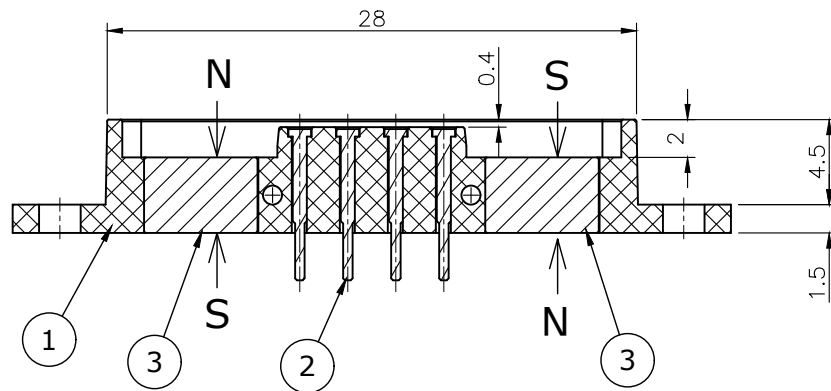


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2022/03/10
2	ECR2500007	TIM	2025/07/09

SPECIFICATION:

1. Contact Resistance: 50mΩ
2. Operating Temperature Range: -30°C~+60°C
3. Soldering by manual only

303D-L280M04	2A	12VDC	500g
Match P/N	Current	Voltage	Magnetic Adsorption Force

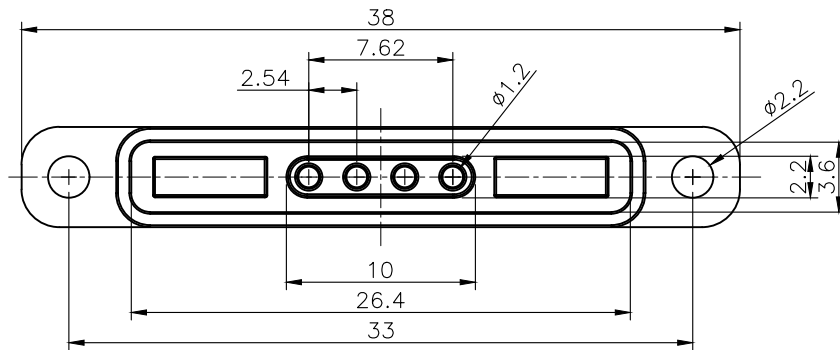







ASSEMBLY

4	GLUE	LSR-67
3	MAGNET	N52 NdFeB, Nickel plating
2	PIN	Lead Free Brass, 5u" Gold plating over Nickel
1	HOUSING	HTN, UL94V-0, Black

NO.	PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	DECIMAL	LINEAR
	mm	mm
	X.X	±0.50
	X.XX	±0.25
UNIT:	ANGLES	mm
	mm	mm
	X.X	±5°
	X.XX	±3°
www.attend.com.tw		
DRAWN	Fros	2022/03/10
CHECKED	Tim	2022/03/10
APPROVED	Ken	2022/03/10
DRAWN NAME:		Machine Pin Magnetic, 4 Pin
PRODUCT NO.		303D-L380F04
FILE NAME		303D-L380F04_B_2

Magnet
Orientation
Marker

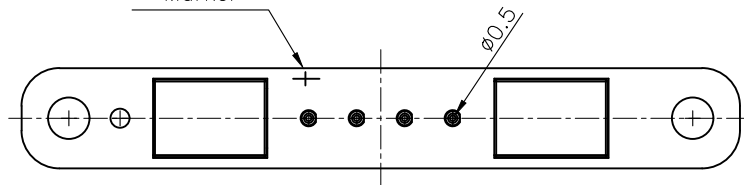

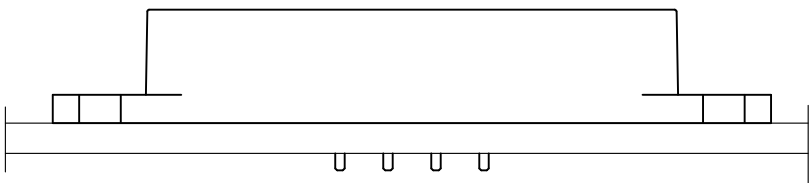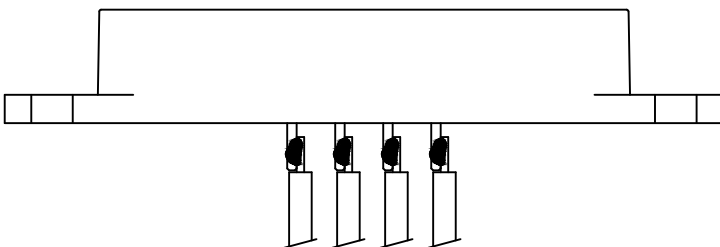1	2	3	4	5	6	7	8	9	10	
							REV.	DESCRIPTION	DRAWN	DATE
1. Use PCB for soldering - A					2. Using wire for soldering					
										
										
										
Recommended layout General tolerance: $\pm 0.05\text{mm}$										

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
					www.attend.com.tw	
DRAWN		Fros	2022/03/10		DRAWN NAME:	
CHECKED		Tim	2022/03/10		Machine Pin Magnetic, 4 Pin	
APPROVED		Ken	2022/03/10		38.0x5.3x8.5h, 5u", 500g, 5A, Black	
PRODUCT NO.		303D-L380F04				
FILE NAME		303D-L380F04_B_2				