




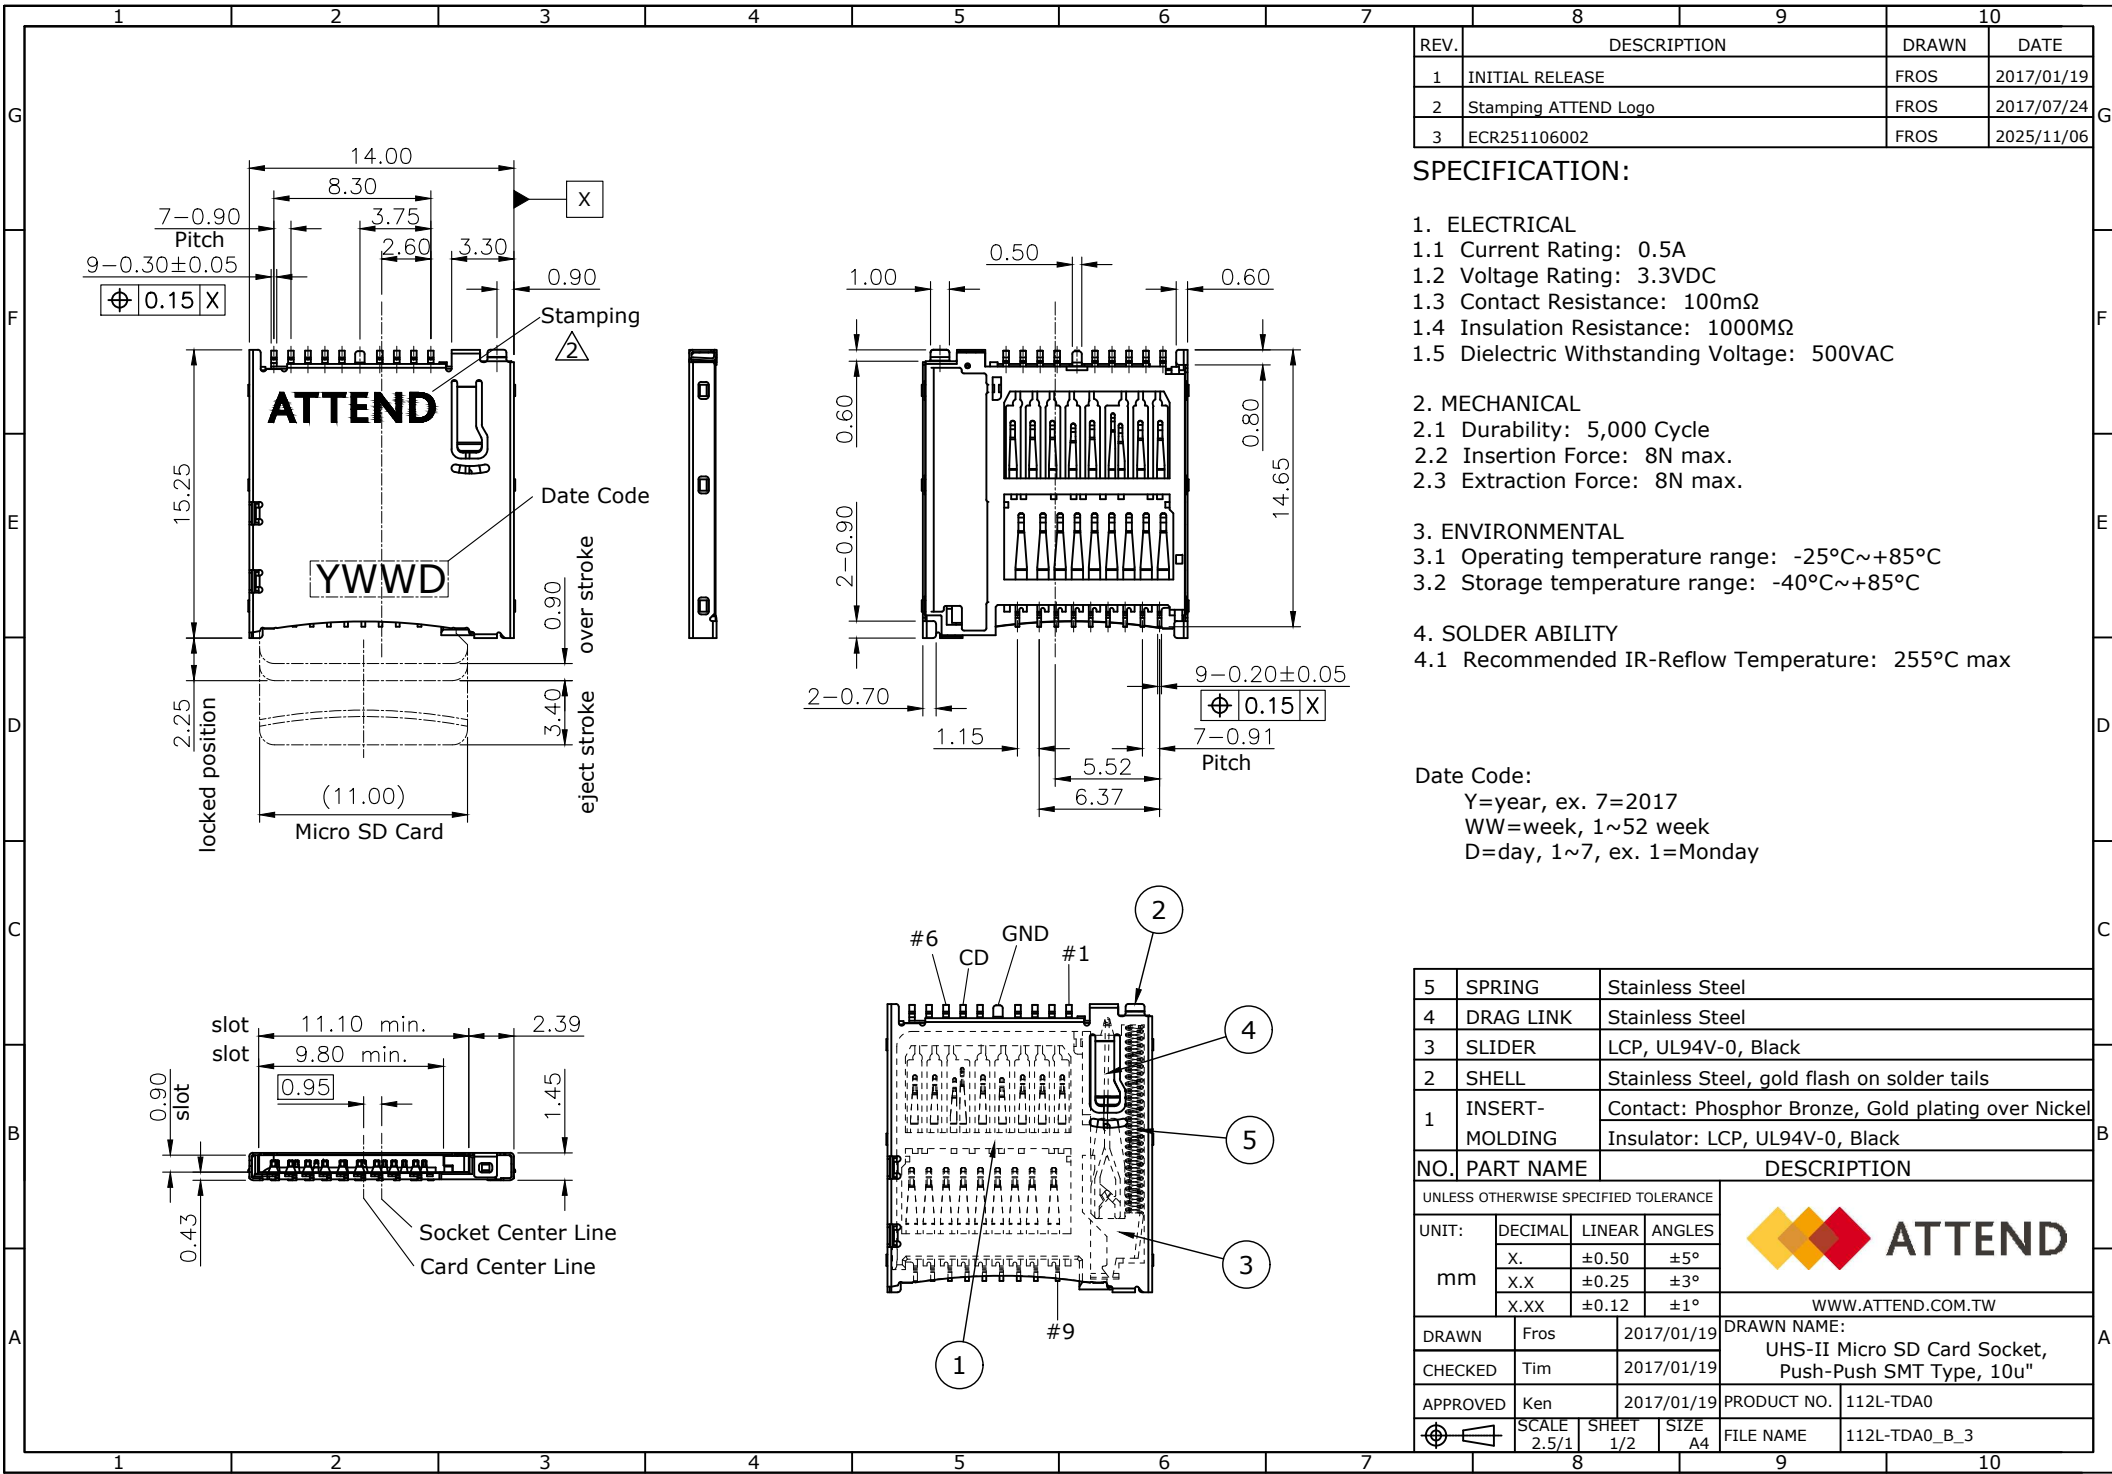

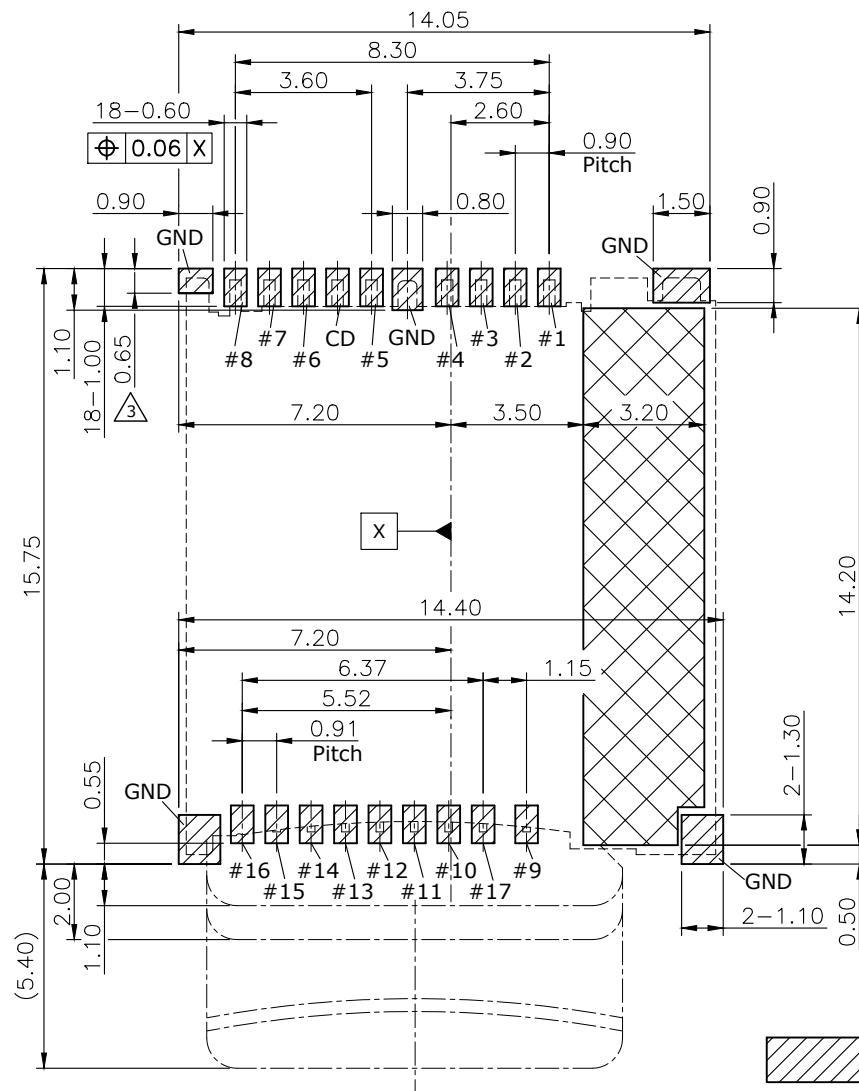


Recommended Layout (top view)
General Tolerance: $\pm 0.05\text{mm}$



PAD



Insulation Area

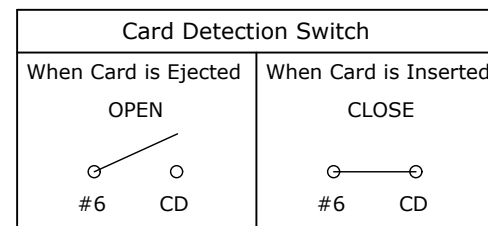

Pin No.	Pin Assignment
#1	DAT2
#2	CD/DAT3
#3	CMD
#4	Vdd
#5	CLK
#6	Vss
#7	DAT0
#8	DAT1
#9	Vdd2
#10	Vss
#11	D0+
#12	D0-
#13	Vss
#14	D1-
#15	D1+
#16	Vss
#17	SWIO
GND	Ground
CD	Card Detect

UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:	DECIMAL	LINEAR	ANGLES	
mm	X.	± 0.50	$\pm 5^\circ$	
	X.X	± 0.25	$\pm 3^\circ$	
	X.XX	± 0.12	$\pm 1^\circ$	
DRAWN	Fros	2017/01/19	DRAWN NAME: UHS-II Micro SD Card Socket, Push-Push SMT Type, 10u"	
CHECKED	Tim	2017/01/19		
APPROVED	Ken	2017/01/19	PRODUCT NO.	I12L-TDA0
	SCALE 5/1	SHEET 2/2	SIZE A4	FILE NAME I12L-TDA0_B_3



WWW.ATTEND.COM.TW