

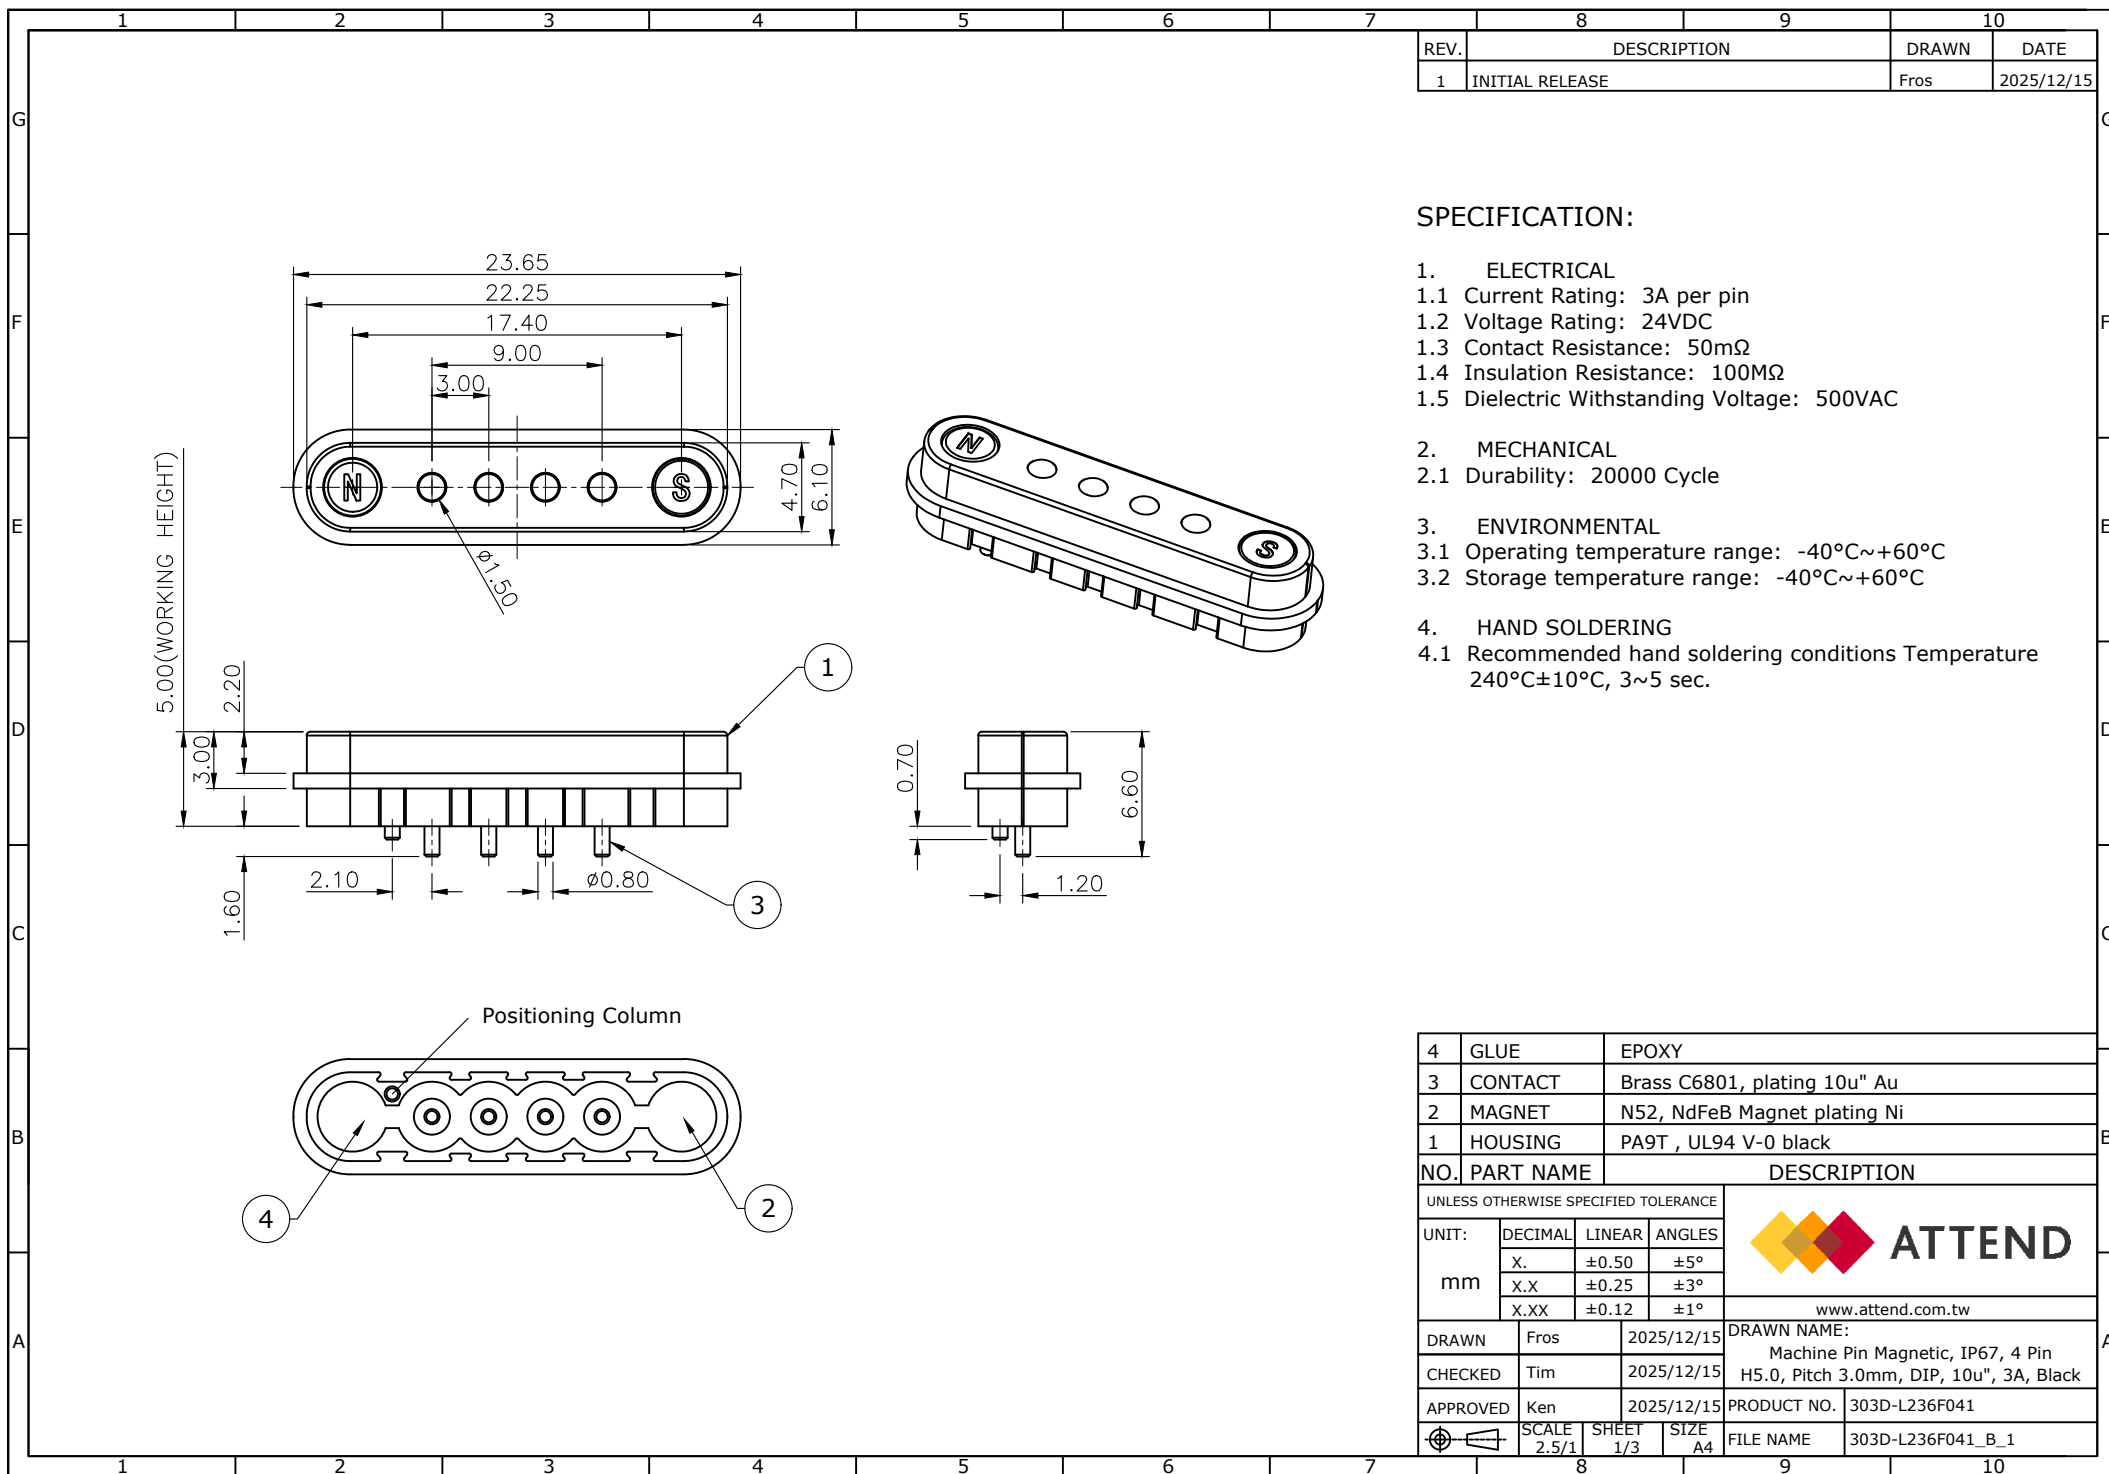



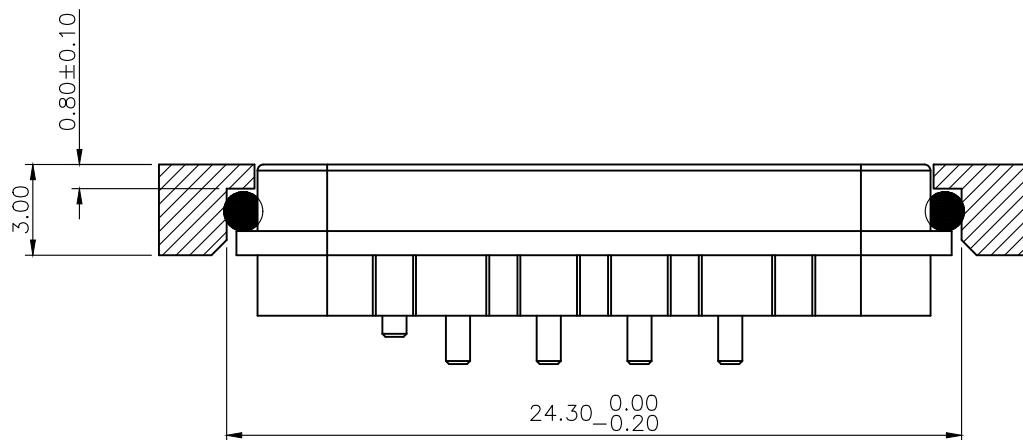

Note 1:

ORING P/N: 303-0012



(The connector number does not include the O-ring, please order it separately if you want ORING)

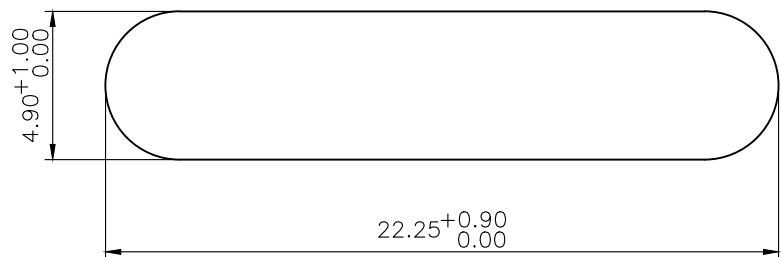

Recommended Panel Cut


UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
mm	X.XX	±0.12	±1°		www.attend.com.tw	
DRAWN	Fros	2025/12/15	DRAWN NAME:			
CHECKED	Tim	2025/12/15	Machine Pin Magnetic, IP67, 4 Pin H5.0, Pitch 3.0mm, DIP, 10u", 3A, Black			
APPROVED	Ken	2025/12/15	PRODUCT NO.	303D-L236F041		
	SCALE 2.5/1	SHEET 2/3	SIZE A4	FILE NAME	303D-L236F041_B_1	

1. Use PCB for soldering

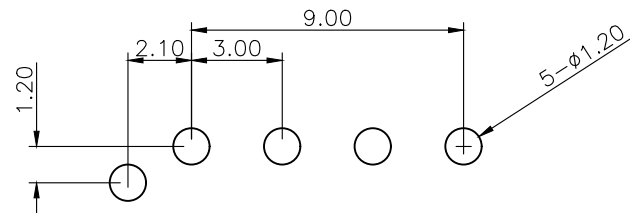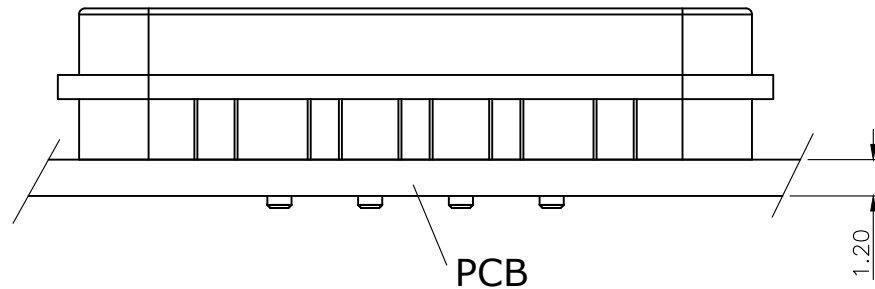

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE: ± 0.05

2. Using wire for soldering

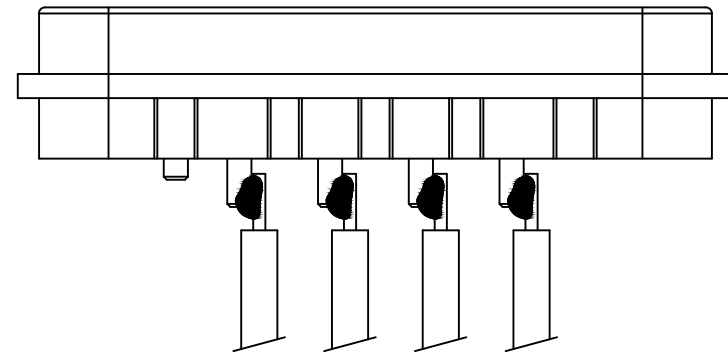

UNLESS OTHERWISE SPECIFIED TOLERANCE				ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2025/12/15	DRAWN NAME: Machine Pin Magnetic, IP67, 4 Pin H5.0, Pitch 3.0mm, DIP, 10u", 3A, Black		
CHECKED	Tim	2025/12/15			
APPROVED	Ken	2025/12/15	PRODUCT NO.	303D-L236F041	
	SCALE 2.5/1	SHEET 3/3	SIZE A4	FILE NAME	303D-L236F041_B_1

www.attend.com.tw