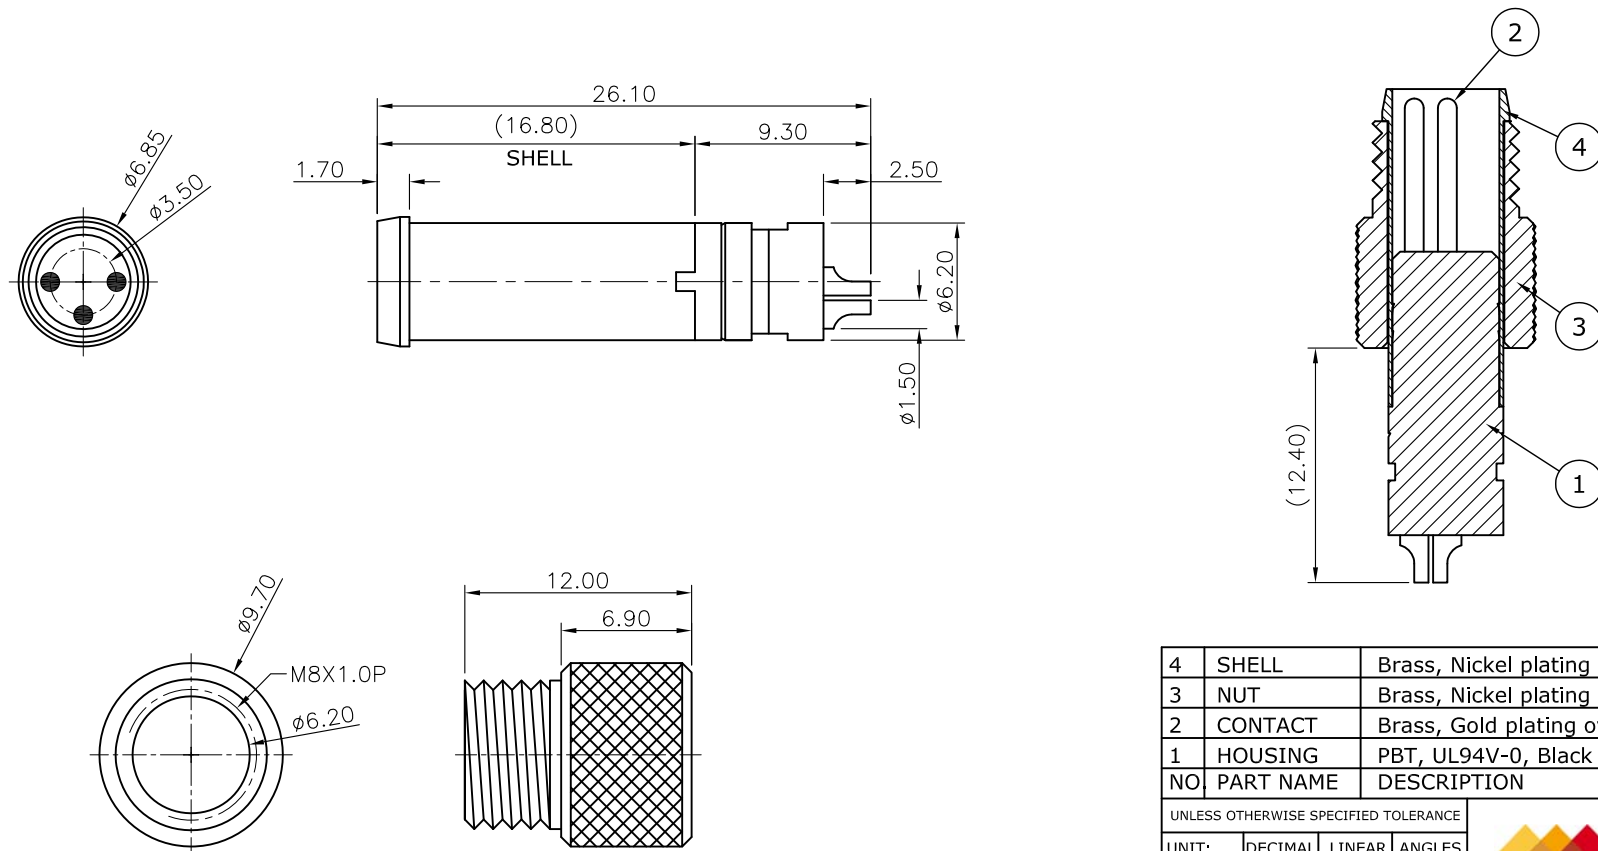


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2019/02/25
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

- CURRENT RATING: 3A
- VOLTAGE: 50VAC/60VDC
- WATER PROOF: IPX7
- OPERATION TEMPERATURE: -40°C TO +85°C

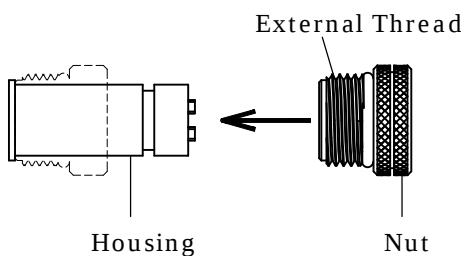
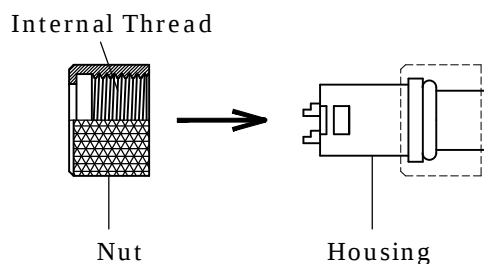
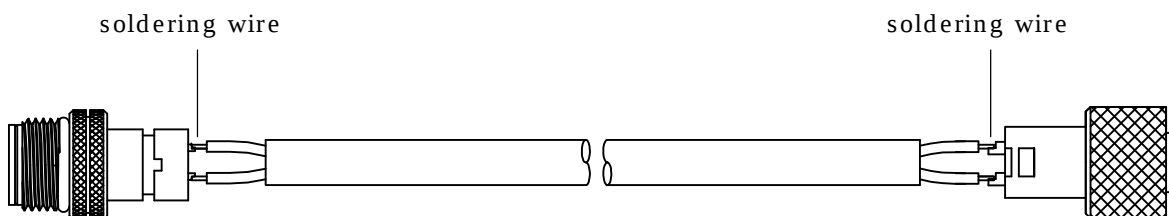
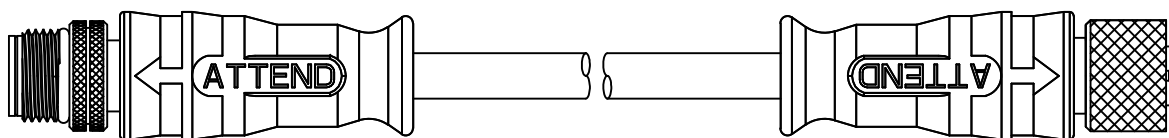


NUT

4	SHELL	Brass, Nickel plating	
3	NUT	Brass, Nickel plating	
2	CONTACT	Brass, Gold plating over Nickel	
1	HOUSING	PBT, UL94V-0, Black	
NO	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
		 ATTEND	
		WWW.ATTEND.COM.TW	
DRAWN	Tim	2019/02/25	DRAWN NAME: M8 A-Code Plug for Cable 3Pin Male For Overmold with Cable
CHECKED	Fros	2019/02/25	
APPROVED	Ken	2019/02/25	
		PRODUCT NO.	219A-03MO0
	SCALE 2.5/1	SHEET 1/1	SIZE A4
		FILE NAME	219A-03MO0_B_2



WWW.ATTEND.COM.TW

							REV.	DESCRIPTION		DRAWN	DATE																																																																			
1. Setting Connector																																																																														
																																																																														
Male Connector						Female Connector																																																																								
2. Wire Processing																																																																														
																																																																														
3. Overmolded Cable Assemblies																																																																														
																																																																														
<table><tr><td colspan="8">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="4" rowspan="5"></td></tr><tr><td colspan="2">UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td colspan="3">ANGLES</td></tr><tr><td rowspan="3">m m</td><td>X.</td><td>±0.50</td><td colspan="3">±5°</td></tr><tr><td>X.X</td><td>±0.25</td><td colspan="3">±3°</td></tr><tr><td>X.XX</td><td>±0.12</td><td colspan="3">±1°</td></tr><tr><td>DRAWN</td><td>Tim</td><td colspan="2">2025/02/25</td><td colspan="4">DRAWN NAME:</td></tr><tr><td>CHECKED</td><td>Fros</td><td colspan="2">2025/02/25</td><td colspan="4">M Series For Male Cable Overmold Type Design Guide</td></tr><tr><td>APPROVED</td><td>Ken</td><td colspan="2">2025/02/25</td><td colspan="4">PRODUCT NO.</td></tr><tr><td></td><td>SCALE</td><td>SHEET 1/1</td><td>SIZE A4</td><td>FILE NAME</td><td colspan="3">M Series MO0_DG</td></tr></table>												UNLESS OTHERWISE SPECIFIED TOLERANCE												UNIT:		DECIMAL	LINEAR	ANGLES			m m	X.	±0.50	±5°			X.X	±0.25	±3°			X.XX	±0.12	±1°			DRAWN	Tim	2025/02/25		DRAWN NAME:				CHECKED	Fros	2025/02/25		M Series For Male Cable Overmold Type Design Guide				APPROVED	Ken	2025/02/25		PRODUCT NO.					SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MO0_DG		
UNLESS OTHERWISE SPECIFIED TOLERANCE																																																																														
UNIT:		DECIMAL	LINEAR	ANGLES																																																																										
m m	X.	±0.50	±5°																																																																											
	X.X	±0.25	±3°																																																																											
	X.XX	±0.12	±1°																																																																											
DRAWN	Tim	2025/02/25		DRAWN NAME:																																																																										
CHECKED	Fros	2025/02/25		M Series For Male Cable Overmold Type Design Guide																																																																										
APPROVED	Ken	2025/02/25		PRODUCT NO.																																																																										
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MO0_DG																																																																									