




REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/08/07

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance
3. Characteristic impedance: 100 Ω
4. Operating temperature range: -40°C~+105°C

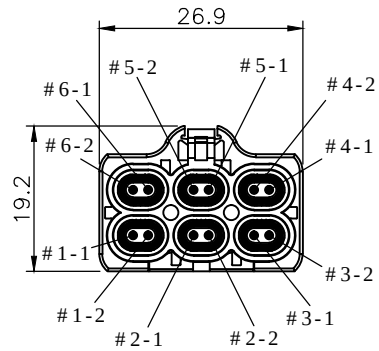

Conn.1

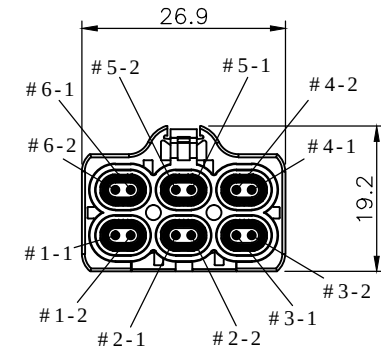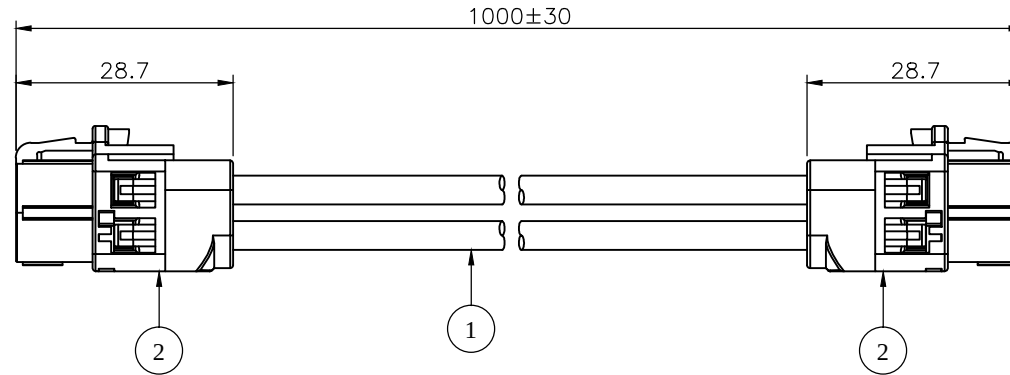

Conn.2

PIN ASSIGNMENT

Conn.1		Conn.2
1-1	_____	1-1
1-2	_____	1-2
2-1	_____	2-1
2-2	_____	2-2
3-1	_____	3-1
3-2	_____	3-2
4-1	_____	4-1
4-2	_____	4-2
5-1	_____	5-1
5-2	_____	5-2
6-1	_____	6-1
6-2	_____	6-2
Shield	_____	Shield

2	2PCS	CONN., HS-MTP Straight Jack(2x3), Gold plated 30u"		
1	A/R	DIFFERENTIAL CABLE, 26AWGx2C, OD: 3.8mm, BLACK		
NO.	Q'ty	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		ATTEND www.attend.com.tw		
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5 >401 ±10 ANGLE ±5°			
m m				
DRAWN	Tim	2025/08/07	DRAWN NAME:	
CHECKED	Fros	2025/08/07	HS-MTP Jack(2x3) to Jack(2x3) Cable L=100 CM, Z CODE	
APPROVED	Allen	2025/08/07	CUSTOMER NO.	
	SCALE 0.8	SHEET 1/1	SIZE A4	
PRODUCT NO.		MTP-1J1J-100Z05		