
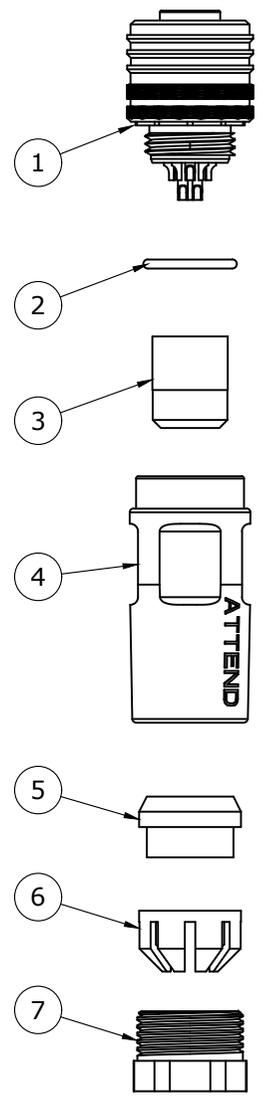


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

**SPECIFICATION:**

- CONN.  
Housing: NYLON 66, UL94-V0 black  
Contact: Brass, G/F plated over nickel  
Shell 1 & 2: Brass, nickel plated over all  
Oring: Silicone  
Locking: Stainless steel
- Rated current (40°C): 1.5A
- Rated voltage: 30V
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

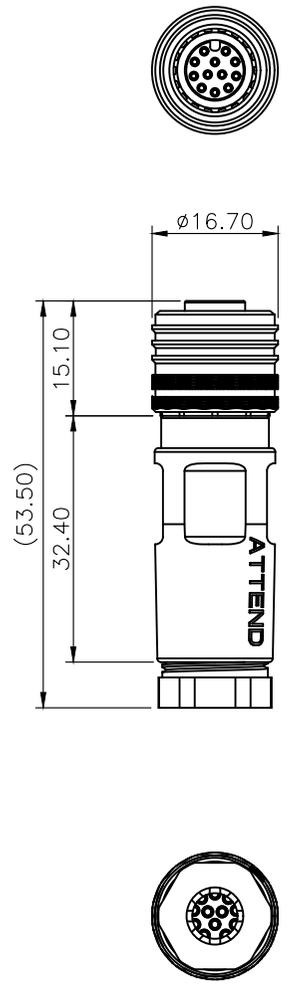

7	GLAND NUT	Zinc alloy
6	GLAND CAGE	POM, white
5	GLAND	Silicone, black
4	BODY	Zinc alloy
3	SHIELD	NBR, black
2	ORING	NBR, black
1	CONN.	See note

NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	mm	X. ±0.50	X.X ±3°
		X.XX ±0.25	X.XXX ±1°
		X.XXX ±0.12	
DRAWN	Fros	2025/12/29	 www.attend.com.tw
CHECKED	Tim	2025/12/29	
APPROVED	Ken	2025/12/29	
DRAWN NAME:		M12 A-Code Plug for Cable, 12Pin Female Pins for Field Installable	
PRODUCT NO.		216A-12FF2	
SCALE		SHEET	SIZE
1/1		1/1	A4
FILE NAME		216A-12FF2_B_1	