


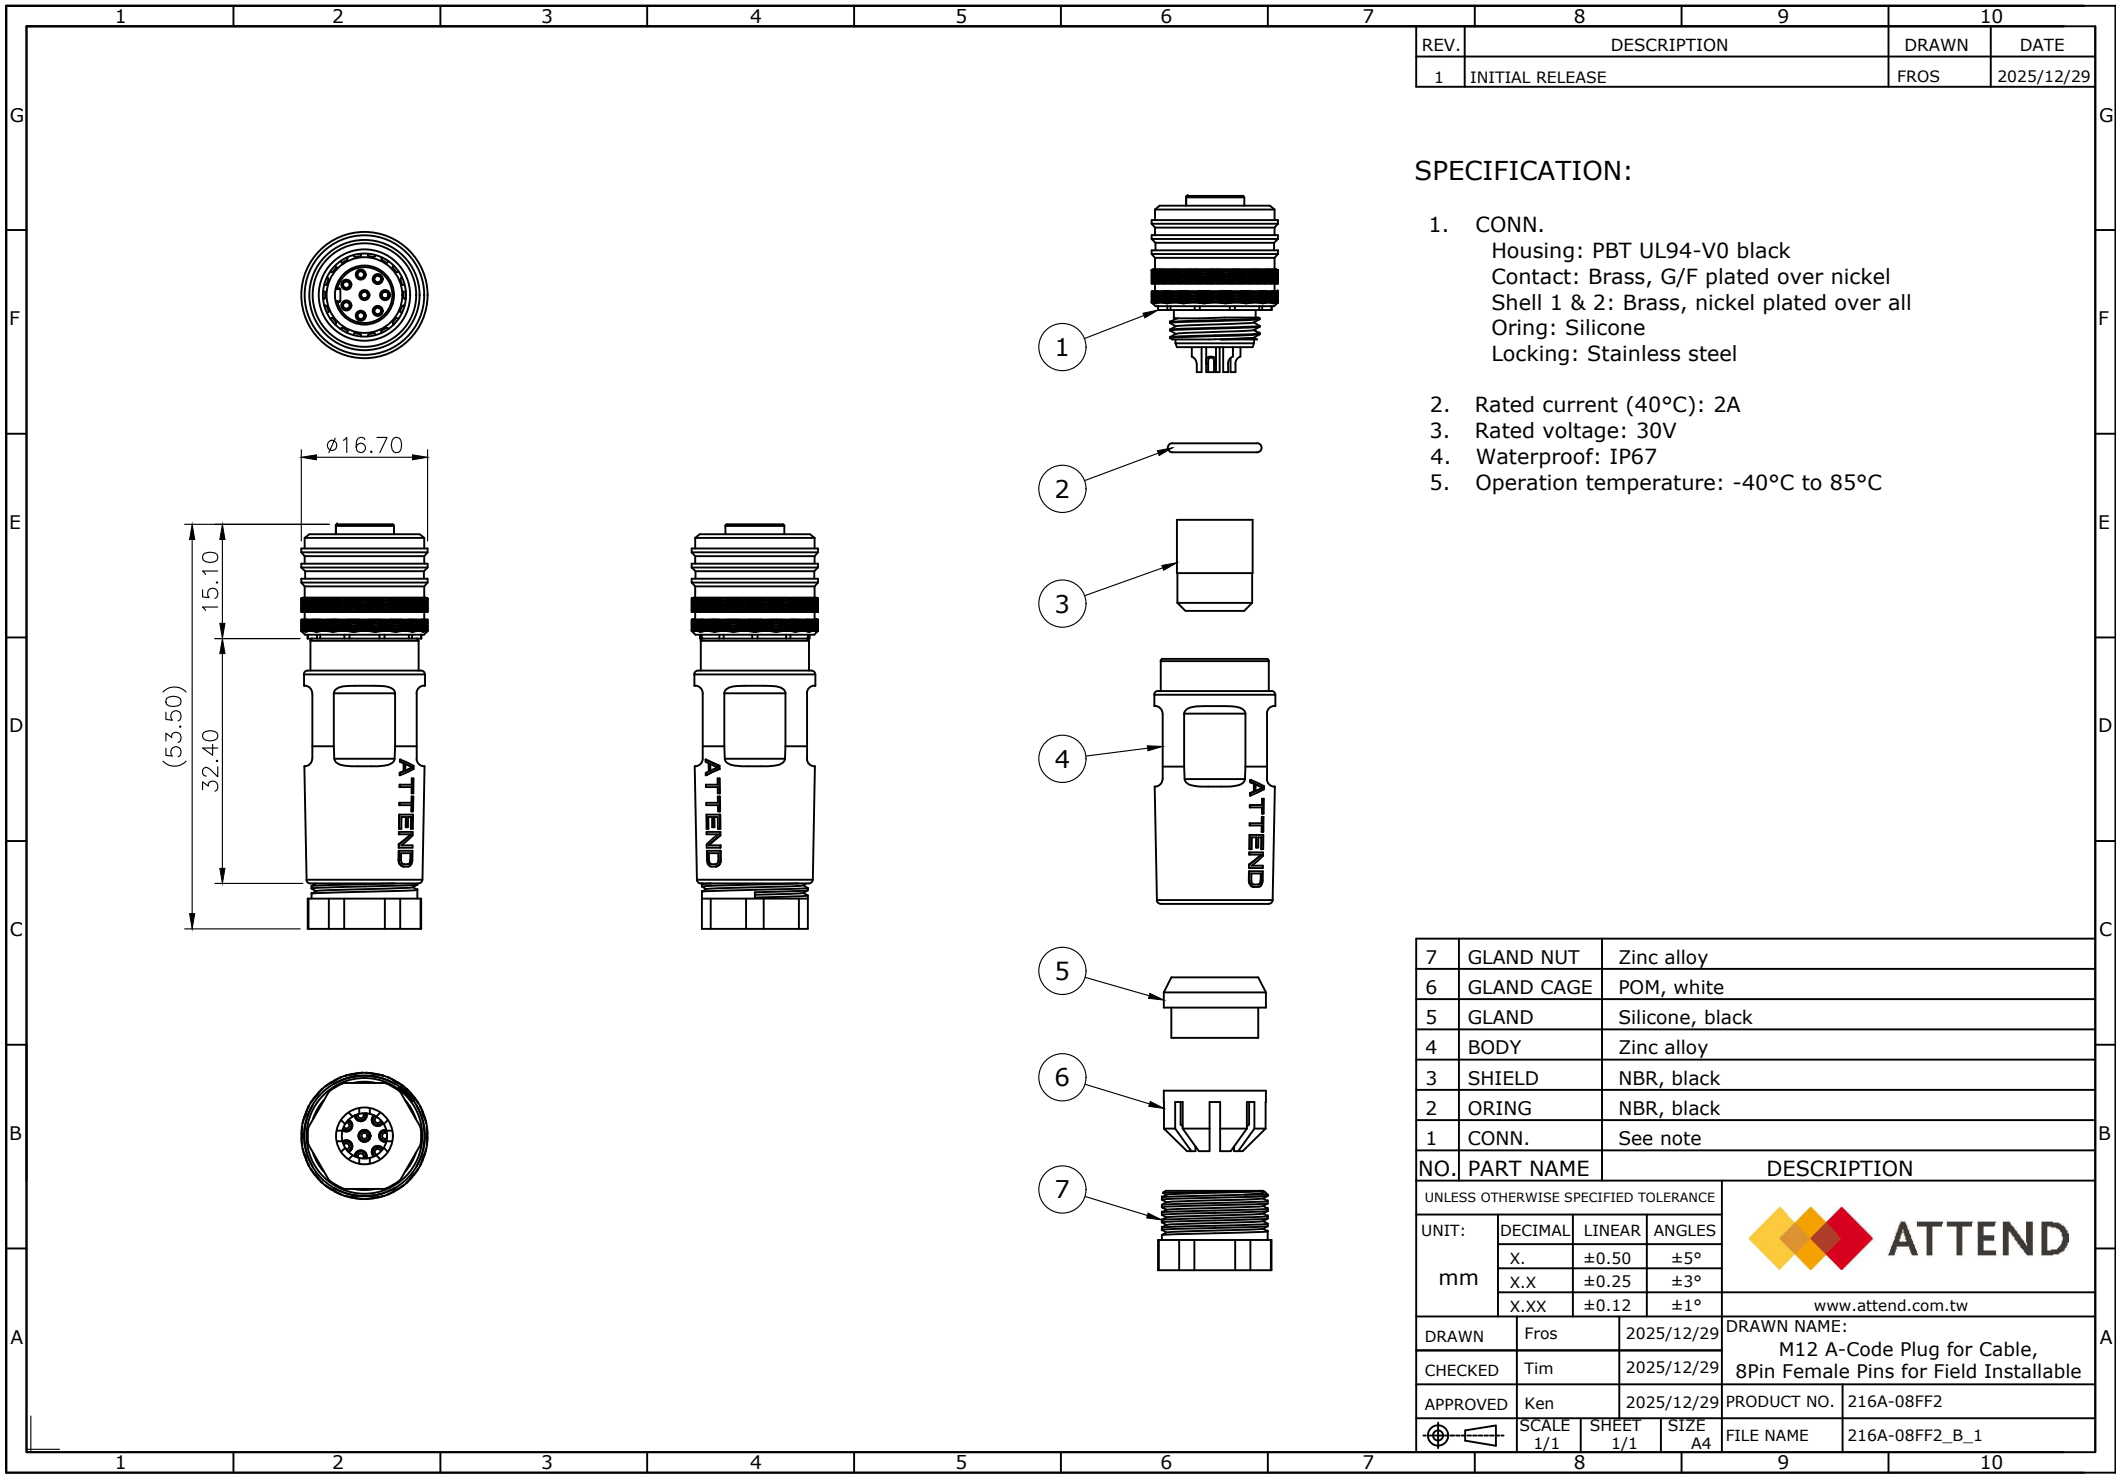

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

SPECIFICATION:

- CONN.
Housing: PBT UL94-V0 black
Contact: Brass, G/F plated over nickel
Shell 1 & 2: Brass, nickel plated over all
Oring: Silicone
Locking: Stainless steel
- Rated current (40°C): 2A
- Rated voltage: 30V
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

7	GLAND NUT	Zinc alloy		
6	GLAND CAGE	POM, white		
5	GLAND	Silicone, black		
4	BODY	Zinc alloy		
3	SHIELD	NBR, black		
2	ORING	NBR, black		
1	CONN.	See note		
NO.	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND www.attend.com.tw		
UNIT:	DECIMAL		LINEAR	ANGLES
	X.		±0.50	±5°
	X.X		±0.25	±3°
	X.XX		±0.12	±1°
DRAWN	Fros	2025/12/29	DRAWN NAME: M12 A-Code Plug for Cable, 8Pin Female Pins for Field Installable	
CHECKED	Tim	2025/12/29		
APPROVED	Ken	2025/12/29		
	SCALE	SHEET	PRODUCT NO.	216A-08FF2
	1/1	1/1		
SIZE		FILE NAME	216A-08FF2_B_1	
A4				