
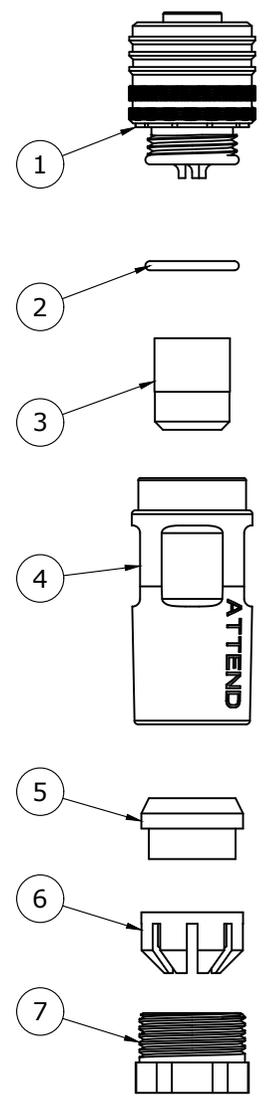


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

SPECIFICATION:

- CONN.
Housing: PBT, UL94-V0 black
Contact: Brass, G/F plated over nickel
Shell 1 & 2: Brass, nickel plated over all
Oring: Silicone
Locking: Stainless steel
- Rated current (40°C): 4A
- Rated voltage: 60V
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

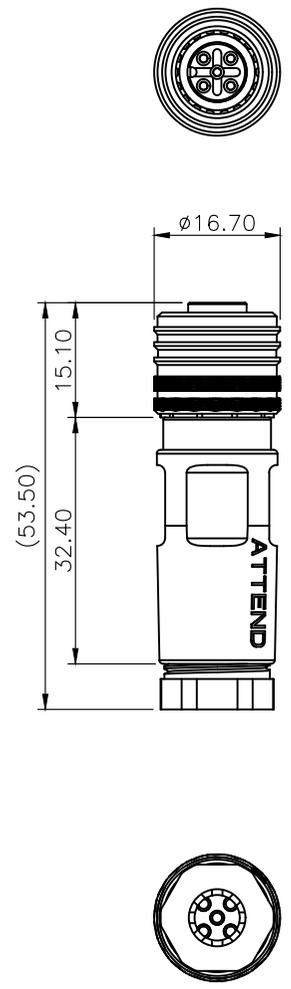

NO.	PART NAME	DESCRIPTION
7	GLAND NUT	Zinc alloy
6	GLAND CAGE	POM, white
5	GLAND	Silicone, black
4	BODY	Zinc alloy
3	SHIELD	NBR, black
2	ORING	NBR, black
1	CONN.	See note

NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2025/12/29	 www.attend.com.tw		
CHECKED	Tim	2025/12/29			
APPROVED	Ken	2025/12/29			
DRAWN NAME:		M12 A-Code Plug for Cable, 5Pin Female Pins for Field Installable			
PRODUCT NO.		216A-05FF2			
FILE NAME		216A-05FF2_B_1			
SCALE	1/1	SHEET	1/1	SIZE	A4