
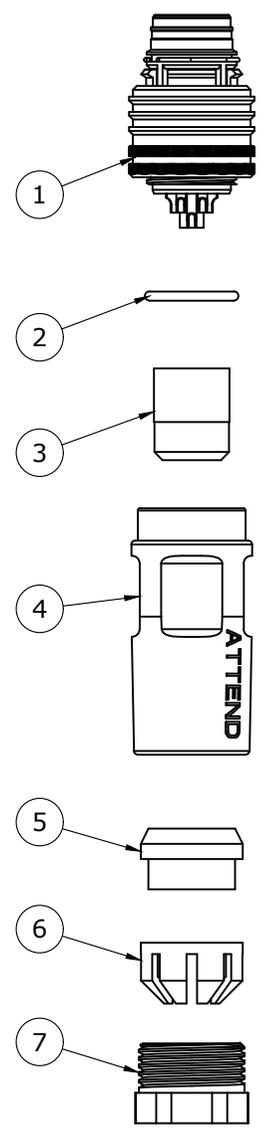
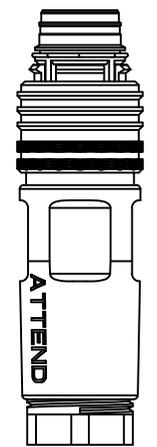


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

**SPECIFICATION:**

- CONN.  
 Housing: PA, UL94-V0 black  
 Contact: Brass, G/F plated over nickel  
 Shell: Zinc alloy, nickel plated over all  
 Locking: PC, black  
 Locking Ring: Brass, nickel plated over all  
 Spring 1 & 2: Stainless steel
- Rated current (40°C): 1.5A
- Rated voltage: 30V
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

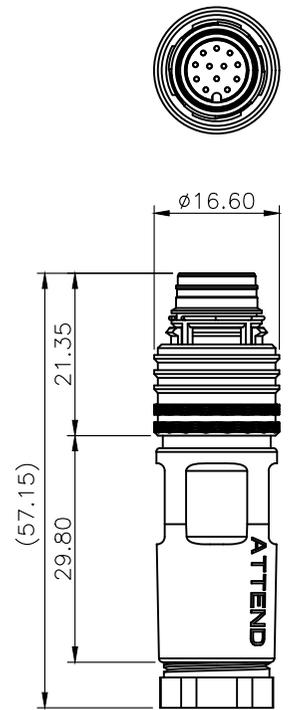

7	GLAND NUT	Zinc alloy
6	GLAND CAGE	POM, white
5	GLAND	Silicone, black
4	BODY	Zinc alloy
3	SHIELD	NBR, black
2	ORING	NBR, black
1	CONN.	See note

NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
mm	X.XX	±0.12	±1°		
DRAWN		Fros	2025/12/29	 www.attend.com.tw	
CHECKED		Tim	2025/12/29		
APPROVED		Ken	2025/12/29		
DRAWN NAME:		M12 A-Code Plug for Cable, 12Pin Male Pins for Field Installable			
PRODUCT NO.		216A-12MF2			
FILE NAME		216A-12MF2_B_1			
SCALE		1/1	SHEET	1/1	SIZE
					A4