


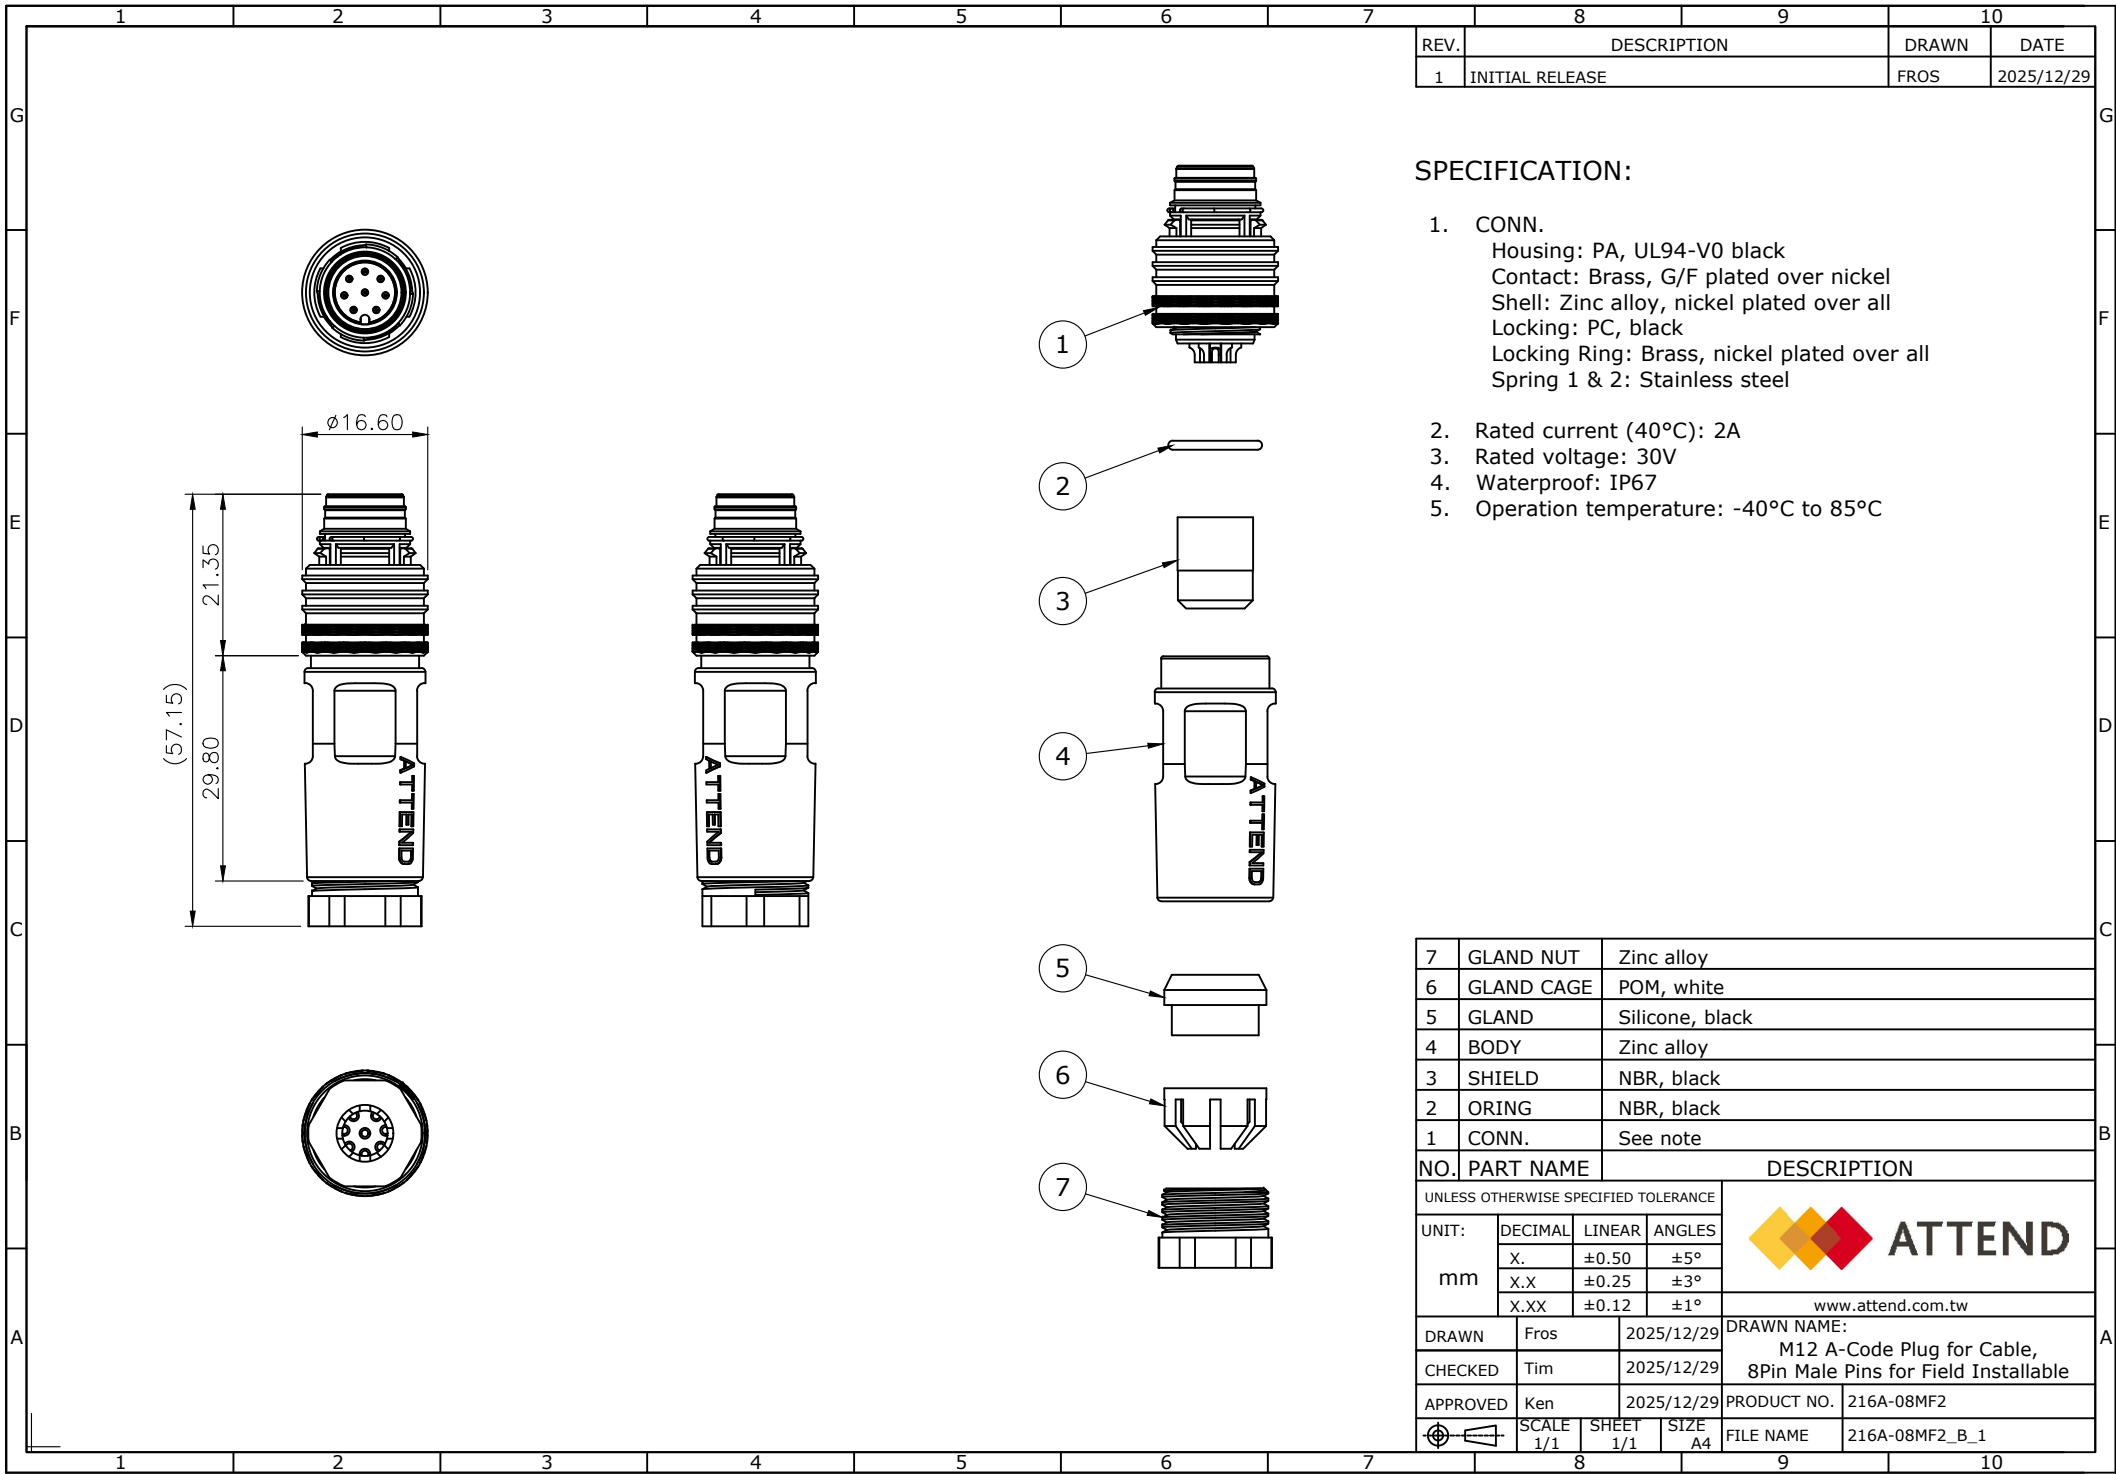

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

SPECIFICATION:

- CONN.
Housing: PA, UL94-V0 black
Contact: Brass, G/F plated over nickel
Shell: Zinc alloy, nickel plated over all
Locking: PC, black
Locking Ring: Brass, nickel plated over all
Spring 1 & 2: Stainless steel
- Rated current (40°C): 2A
- Rated voltage: 30V
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

7	GLAND NUT	Zinc alloy			
6	GLAND CAGE	POM, white			
5	GLAND	Silicone, black			
4	BODY	Zinc alloy			
3	SHIELD	NBR, black			
2	ORING	NBR, black			
1	CONN.	See note			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND www.attend.com.tw			
UNIT:	DECIMAL		LINEAR	ANGLES	
	X.		±0.50	±5°	
	X.X		±0.25	±3°	
	X.XX		±0.12	±1°	
mm					
DRAWN	Fros	2025/12/29	DRAWN NAME: M12 A-Code Plug for Cable, 8Pin Male Pins for Field Installable		
CHECKED	Tim	2025/12/29			
APPROVED	Ken	2025/12/29			
		PRODUCT NO.	216A-08MF2		
	SCALE 1/1	SHEET 1/1	SIZE A4	FILE NAME	216A-08MF2_B_1