

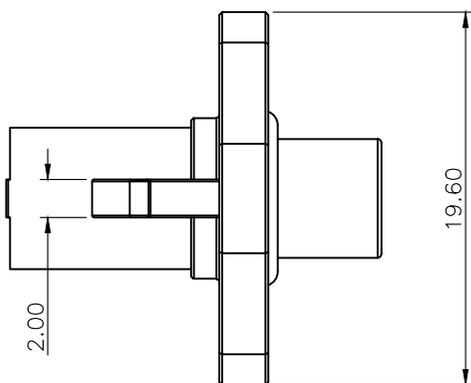
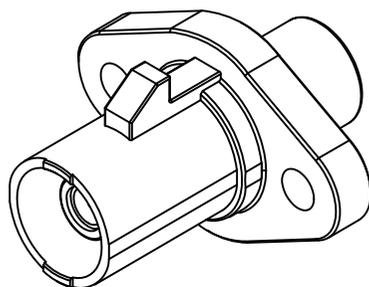
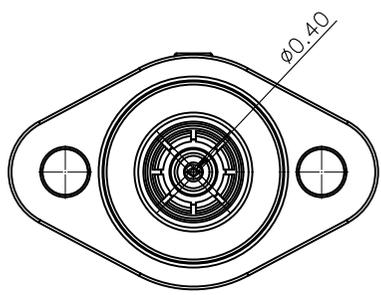


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2026/01/12

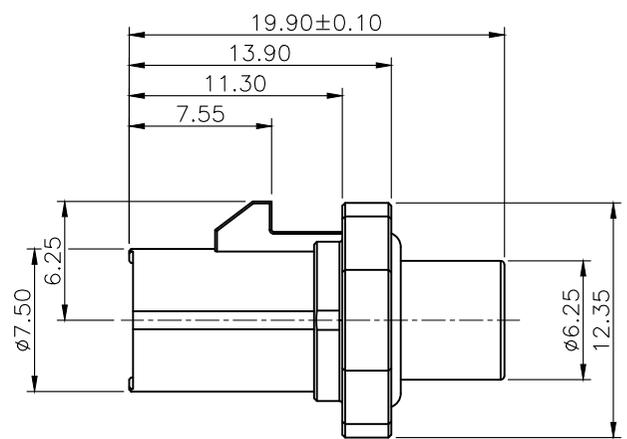


SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 3A
 - 1.2 Voltage Rating: 250V
 - 1.3 Contact Resistance: 20mΩ initial, 40mΩ after
 - 1.4 Insulation Resistance: 1000MΩ
 - 1.5 Dielectric Withstanding Voltage: 500VAC
 - 1.6 Impedance: 50Ω
2. MECHANICAL
 - 2.1 Durability: 25 Cycle
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -40°C~+105°C
 - 3.2 Storage temperature range: -40°C~+105°C
4. SOLDER ABILITY
 - 4.1 Recommended IR-Reflow Temperature: 260°C
 - 4.2 USCAR-17 Compliant

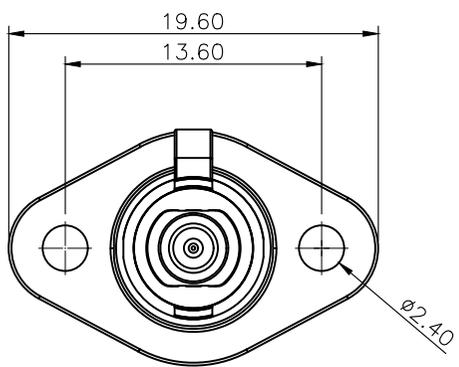

BACK VIEW

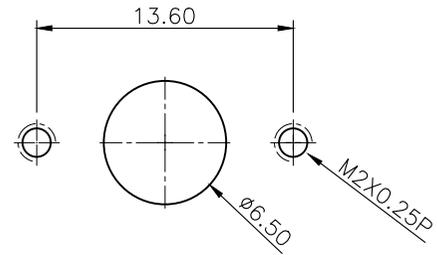

Recommended Panel Thickness 2.0mm
General Tolerance: ±0.05

4	OUTER SHELL	Zinc alloy, 120~240u" nickel over 600~800u" Cu
3	SPRING SHELL	Copper alloy, 50~150u" nickel
2	CONTACT	Copper alloy, 3u" gold over 50~150u" nickel
1	INSULATOR	PTFE, UL94V-0, white

NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	x.	±0.50	±5°
	x.X	±0.25	±3°
	x.XX	±0.12	±1°
DRAWN			Fros
CHECKED			Tim
APPROVED			Ken
SCALE			2.5/1
SHEET			1/1
SIZE			A4
DRAWN NAME:		FAKRA to SMB Adapter, IP67&IP69K, 3u"	
PRODUCT NO.		228C-PSZ2	
FILE NAME		228C-PSZ2_B_1	



www.attend.com.tw