




REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/08/07

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance
3. Characteristic impedance: 50 Ω
4. Operating temperature range: -40°C~+105°C
5. Waterproof rating: IP67

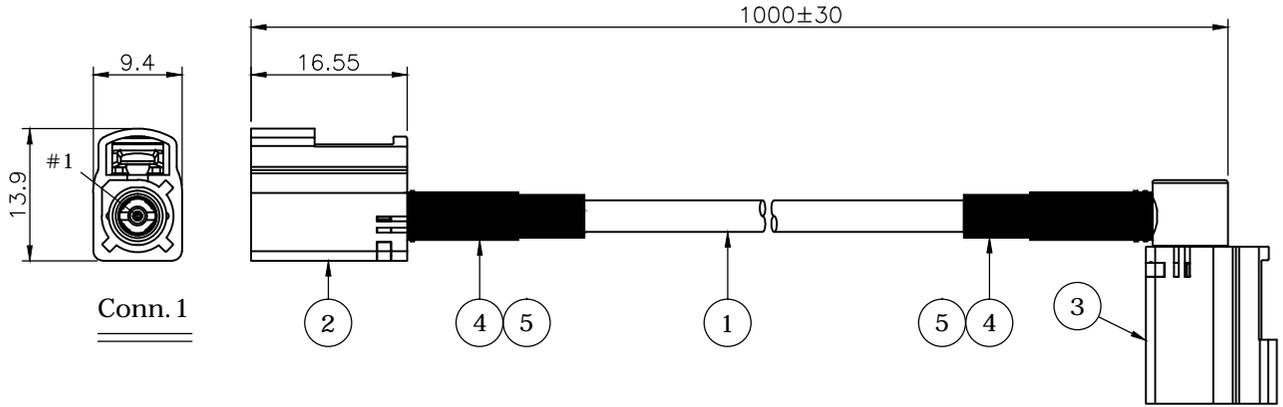

PIN ASSIGNMENT

Conn. 1		Conn. 2
1	—————	1
Shield	—————	Shield

5	xg	Glue
4	2PCS	Heat shrink tube, Black
3	1PC	CONN., FAKRA Jack R/A , Gold plated 1u"
2	1PC	CONN., FAKRA Jack STR, Gold plated 30u"
1	1PC	Coaxial Cable, RTK031, 22AWG+ AB, OD3.3, PVC, Black
NO.	Q'ty	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1	>401 ±10
	11~30 ±2	ANGLE ±5°
mm	31~50 ±3	
	51~200 ±5	
DRAWN		Tim
CHECKED		Fros
APPROVED		Allen
SCALE		1.25
SHEET		1/1
SIZE		A4
DRAWN NAME:		FAKRA Jack STR to Jack R/A Cable
CHECKED		IP67, L=100 CM, Z CODE
APPROVED		CUSTOMER NO.
PRODUCT NO.		FR-1J1J-100Z02W



www.attend.com.tw

