



REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/08/07

**NOTES:**

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance
3. Characteristic impedance: 50 Ω
4. Operating temperature range: -40°C~ +105°C
5. Waterproof rating: IP67

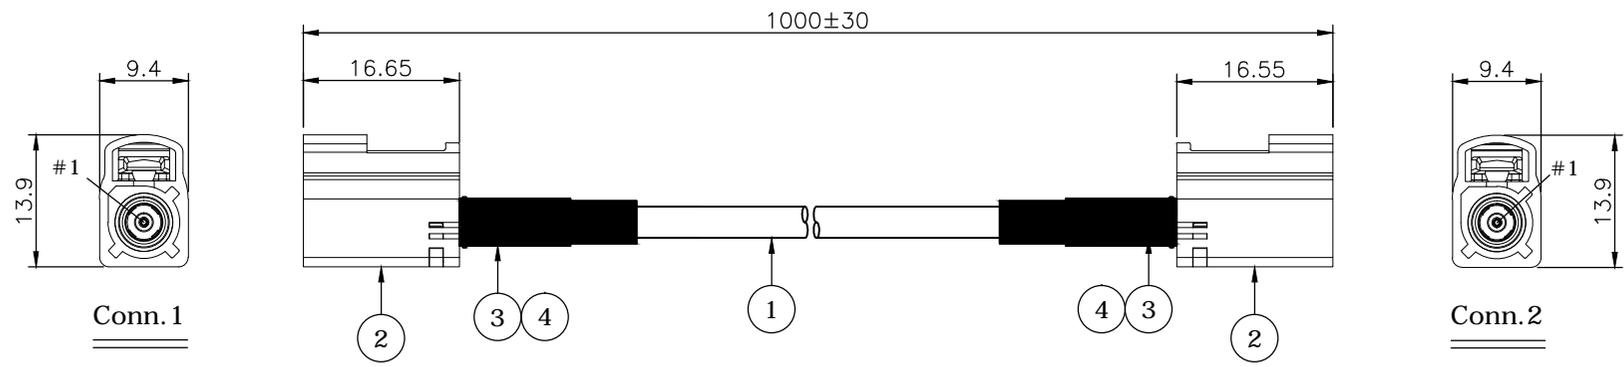

**PIN ASSIGNMENT**

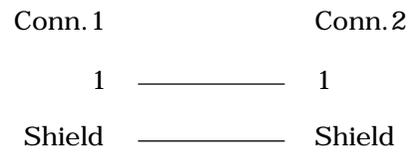

4	xg	Glue
3	2PCS	Heat shrink tube, Black
2	2PCS	CONN., FAKRA Jack Straight, Gold plated 30u"
1	1PC	Coaxial Cable, RTK031, 22AWG+ AB, OD3.3, PVC, Black
NO.	Q'ty	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1	> 401 ±10
	11~30 ±2	ANGLE ±5°
mm	31~50 ±3	
	51~200 ±5	
DRAWN	Tim	2025/08/07
CHECKED	Fros	2025/08/07
APPROVED	Allen	2025/08/07
DRAWN NAME:		FAKRA Jack to Jack Straight Cable
		IP67, L= 100 CM, Z CODE
CUSTOMER NO.		
SCALE	SHEET	SIZE
1.25	1/1	A4
PRODUCT NO.		FR-1J1J-100Z01W



www.attend.com.tw