


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/08/07

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance
3. Characteristic impedance: 50 Ω
4. Operating temperature range: -40°C~ +105°C
5. Waterproof rating: IP67

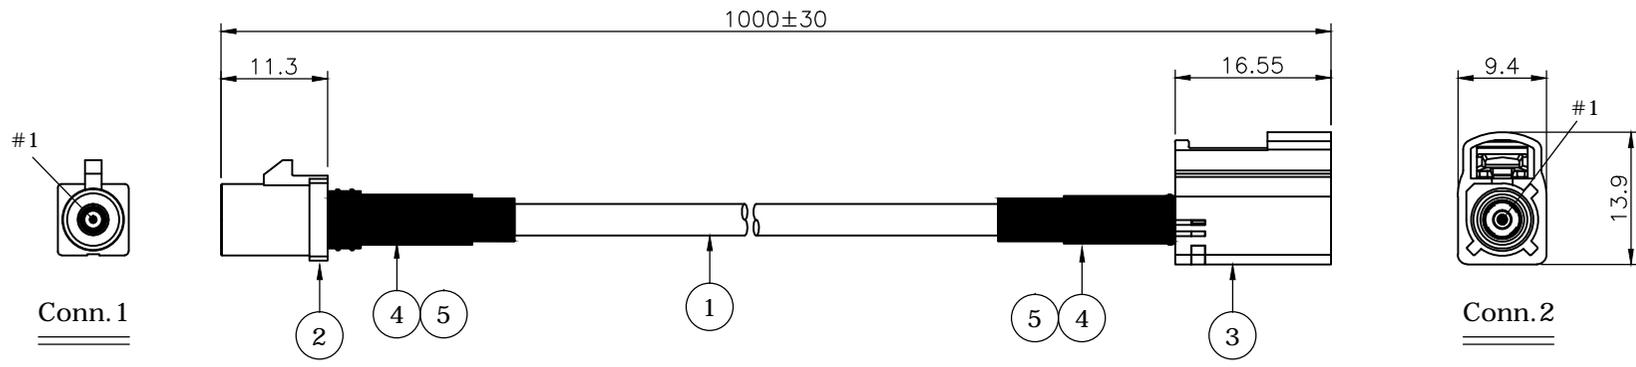

PIN ASSIGNMENT

Conn. 1	Conn. 2
1	1
Shield	Shield

5	xg	Glue
4	2PCS	Heat shrink tube, Black
3	1PC	CONN., FAKRA Jack Straight, Gold plated 30u"
2	1PC	CONN., FAKRA Plug Straight, Gold plated 30u"
1	1PC	Coaxial Cable, RTK031, 22AWG+ AB, OD3.3, PVC, Black
NO.	Q'ty	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1	> 401 ±10
	11~30 ±2	ANGLE ±5°
	31~50 ±3	
	51~200 ±5	
mm		
DRAWN	Tim	2025/08/07
CHECKED	Fros	2025/08/07
APPROVED	Allen	2025/08/07
SCALE 1.25		SHEET 1/1
SIZE A4		
DRAWN NAME:		FAKRA Jack to Plug Straight Cable
		IP67, L= 100 CM, Z CODE
CUSTOMER NO.		
PRODUCT NO.		FR-1J1P-100Z01W



www.attend.com.tw