


| REV. | DESCRIPTION | DRAWN | DATE |
|------|-----------------------------------|-------|------------|
| 2 | ECR2500001 | FROS | 2025/03/10 |
| 3 | Increase the thickness of the rib | FROS | 2025/08/21 |
| 4 | ECR2600003 | FROS | 2026/03/11 |

- NOTE:
- MATERIAL: PBT 4130, UL 94V-0, Black
 - Operating temperature: -40 to +105°C
 - Packaging: 450pcs/bag

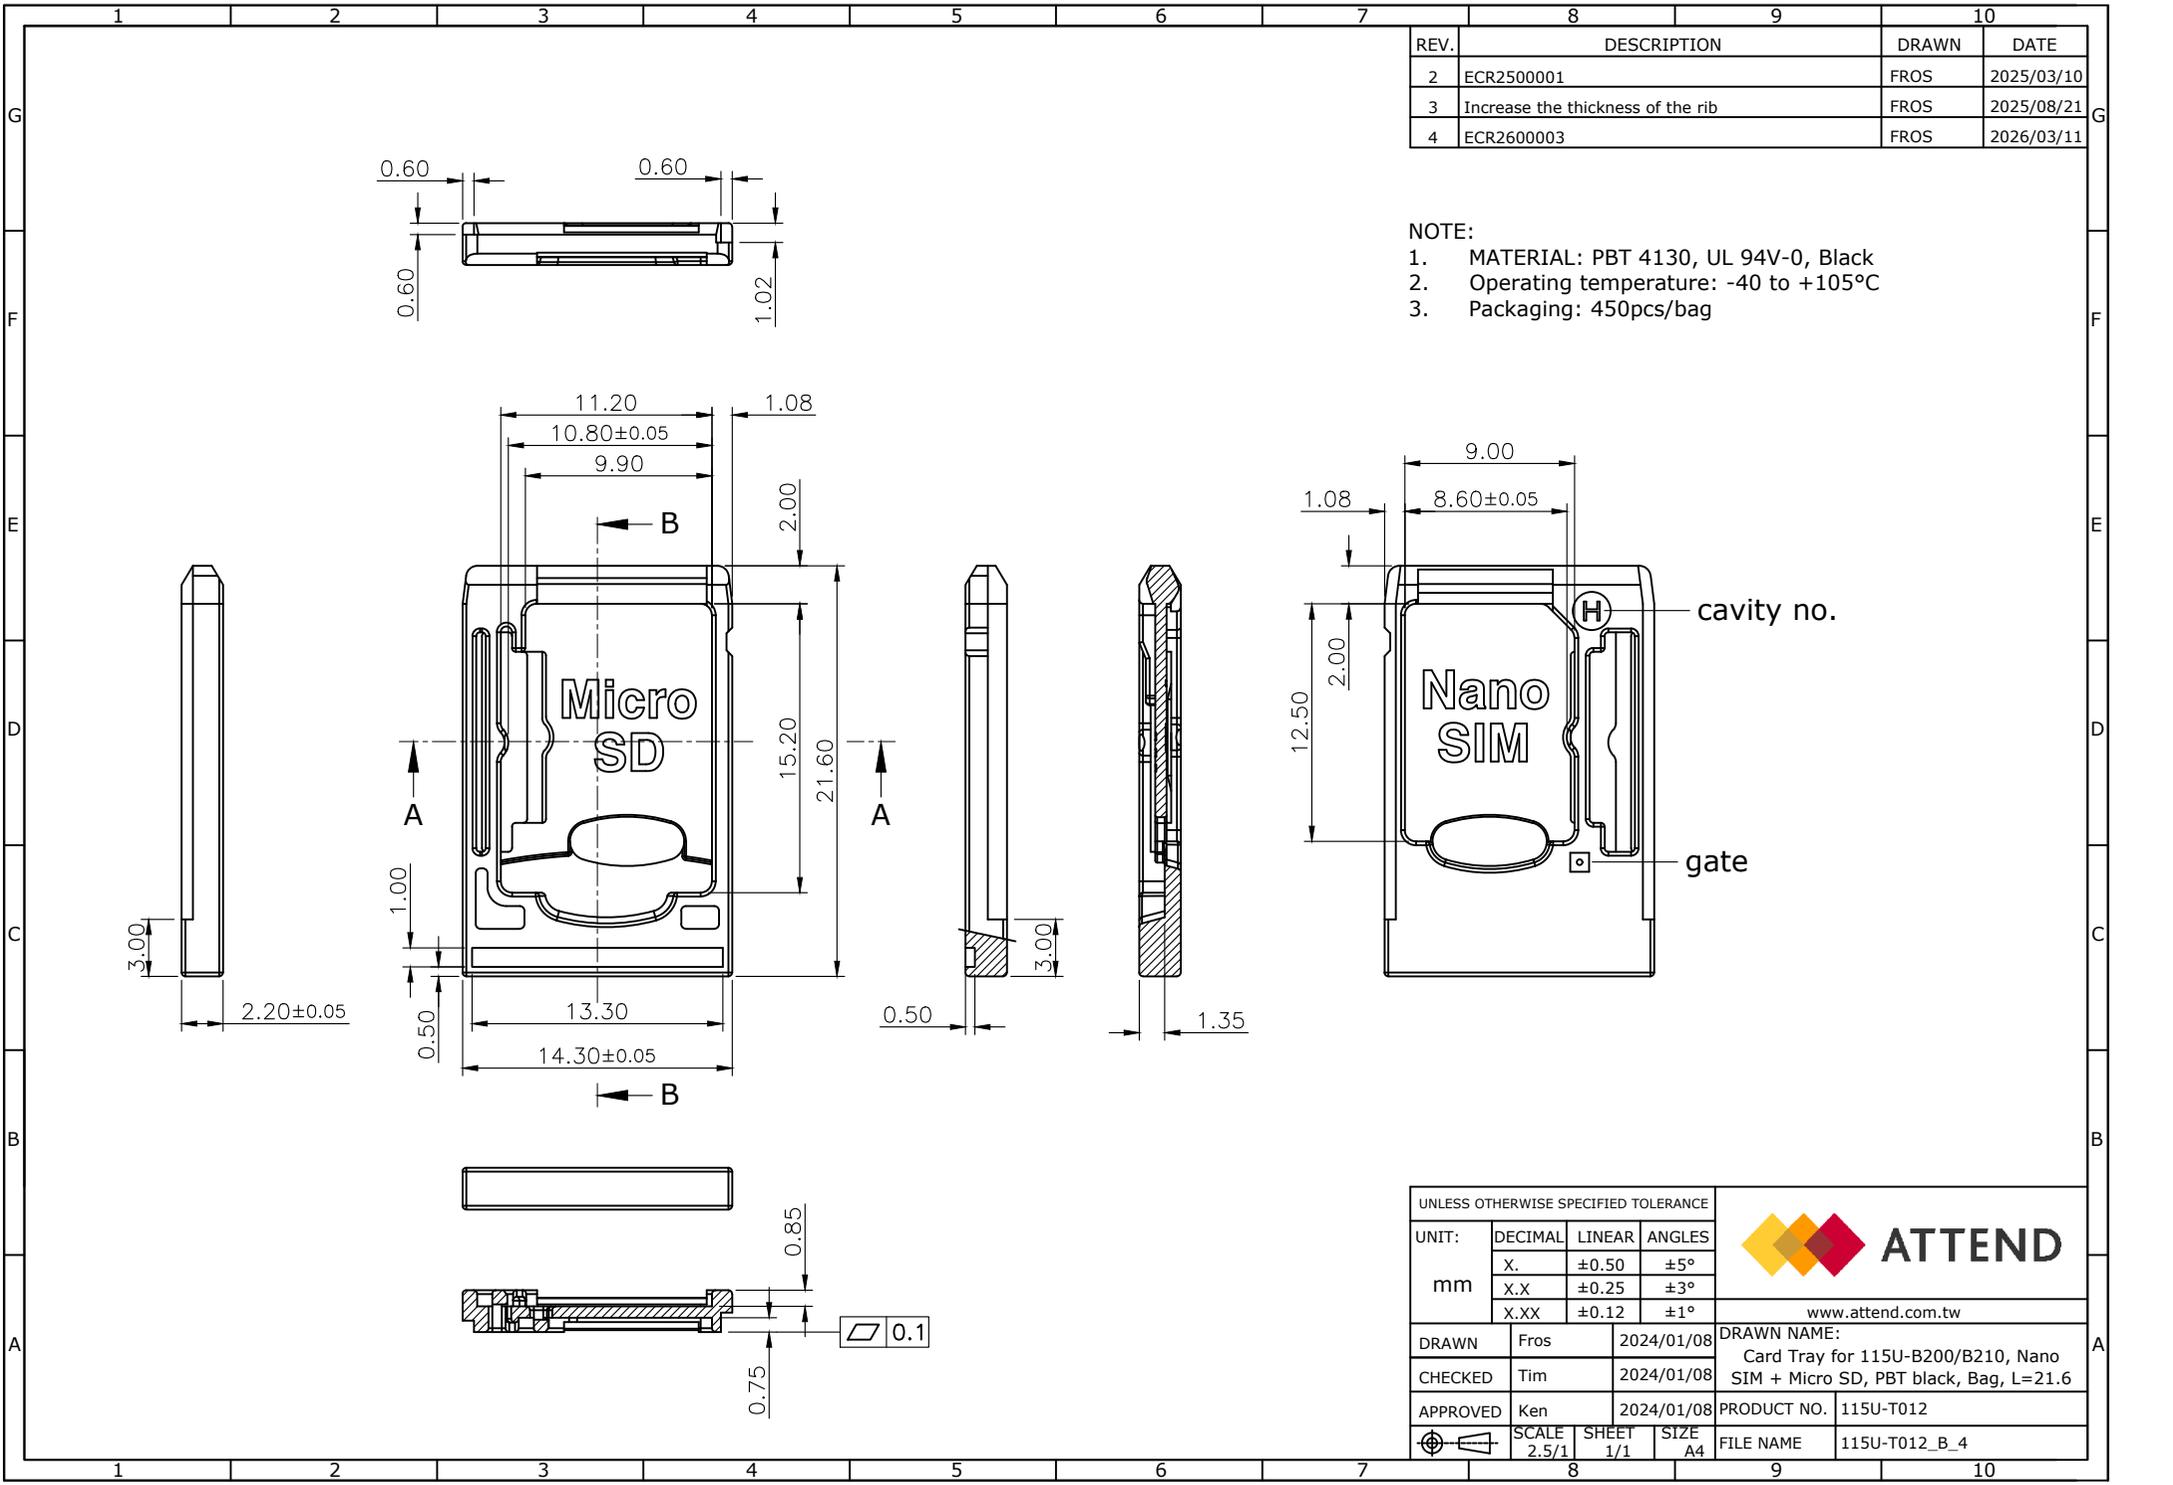

UNLESS OTHERWISE SPECIFIED TOLERANCE

| UNIT: | DECIMAL | LINEAR | ANGLES |
|-------|---------|--------|--------|
| mm | X. | ±0.50 | ±5° |
| | X.X | ±0.25 | ±3° |
| | X.XX | ±0.12 | ±1° |



www.attend.com.tw

| | | | | |
|-----------|-------|------------|---|-----------|
| DRAWN | Fros | 2024/01/08 | DRAWN NAME: | |
| CHECKED | Tim | 2024/01/08 | Card Tray for 115U-B200/B210, Nano SIM + Micro SD, PBT black, Bag, L=21.6 | |
| APPROVED | Ken | 2024/01/08 | PRODUCT NO. | 115U-T012 |
| SCALE | 2.5/1 | SHEET | 1/1 | SIZE |
| | | | | A4 |
| FILE NAME | | | 115U-T012_B_4 | |