

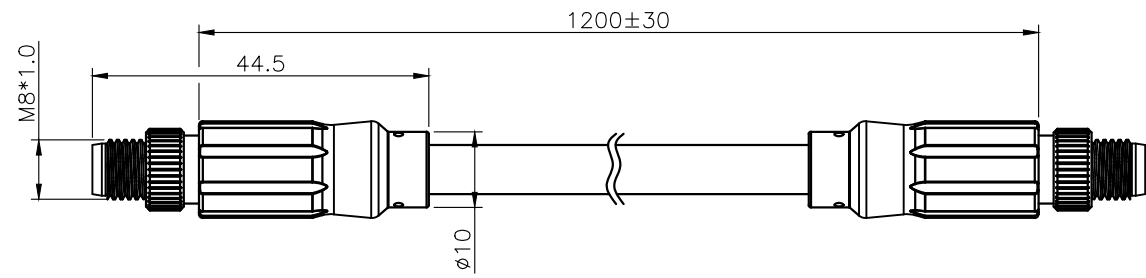



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/05/27
2	Revised arrow and logo depth	FROS	2025/06/04

**NOTES:**


- ELECTRICAL**  
 Current Rating: Pin 1&2 2A, Pin 3&4 8A  
 Voltage Rating: 60VDC  
 Contact Resistance: 20mΩ max.  
 Shell Resistance: 100mΩ max.  
 Insulation Resistance: 500MΩ  
 Voltage Proof: 1000VDC (contact to contact),  
 2250VDC (contact to ground)
- MECHANICAL**  
 Durability: 100 Cycles  
 Insertion Force: 50N max.  
 Pull Out Force: 50N max.
- ENVIRONMENTAL**  
 Operating temperature range: -40°C~+85°C



CONN.1



CONN.2

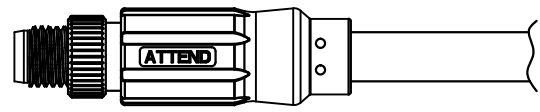

1	Blue	1
2	White	2
3	Red	3
4	Black	4
SHELL	Drain	SHELL
CONN. 1	PIN ASSIGNMENTS	CONN. 2

3	1PC	Cable, 26AWG*2C+AS+18AWG*2C, OD6.5, TPU green
2	2PC	Overmold, PVC black
1	2PC	M8 SPE 4 pin male molded with calbe
NO. Q'ty		DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1	>401 ±10
mm	11~30 ±2	ANGLE ±5°
	31~50 ±3	
	51~200 ±5	
DRAWN		Fros 2025/05/27
CHECKED		Allan 2025/05/27
APPROVED		Ken 2025/05/27
SCALE		1/1
SHEET		1/1
SIZE		A4
DRAWN NAME:		M8 SPE Hybrid cable, Male to Male, L=120 cm
CUSTOMER NO.		
PRODUCT NO.		SPE-1P1P-12002_02



www.attend.com.tw