


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2021/03/23

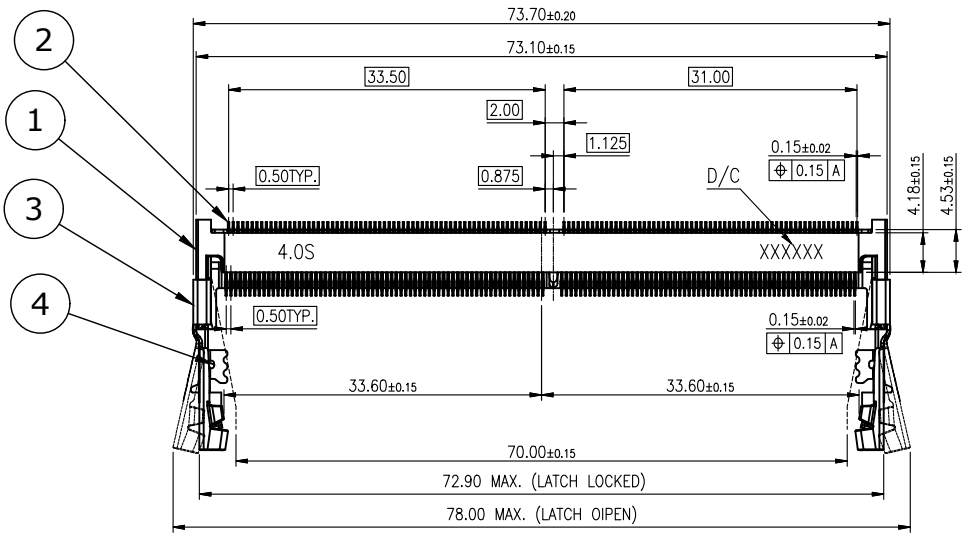

DATE CODE: YYWWD  
YY: YEAR  
WW: WEEK(01~52)  
D: DAY (1~7)




**SPECIFICATION:**

- ELECTRICAL
  - Current Rating: 0.6A per pin
  - Voltage Rating: 25V AC
  - Contact Resistance: 60mΩ max.
  - Insulation Resistance: 100MΩ
  - Dielectric Withstanding Voltage: 500VAC

- MECHANICAL
  - Durability: 50 Cycle
  - Insertion Force: 59.8N max.
  - Extraction Force: 44.6N max.

- ENVIRONMENTAL
  - Operating temperature range: -40°C~+85°C
  - Storage temperature range: -40°C~+85°C

- SOLDER ABILITY
  - Recommended IR-Reflow Temperature: 260°C

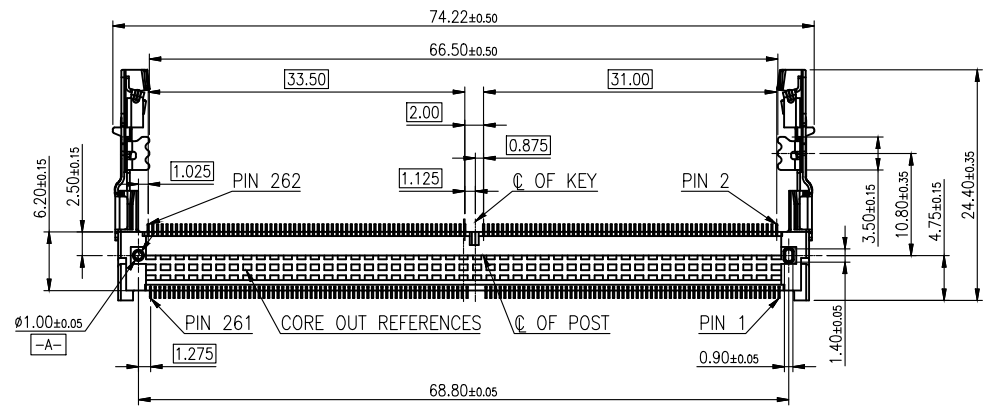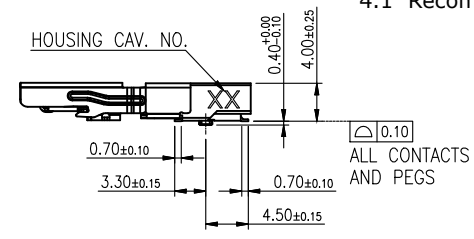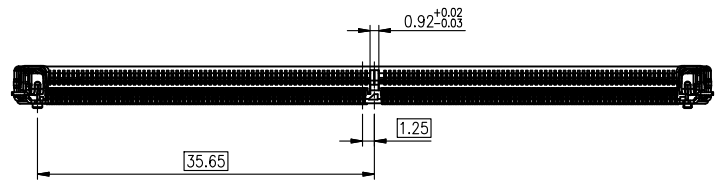

4	PEG	Stainless steel, 50u"~150u" matte tin plating over 50u"~150u" nickel plating
3	LATCH	Stainless steel
2	CONTACT	Copper alloy, 1u" gold plating on contact and solder area, under plating nickel
1	HOUSING	Thermoplastic, UL94V-0, Black

NO.		PART NAME		DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:	DECIMAL	LINEAR	ANGLES	
	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
www.attend.com.tw				
DRAWN	Fros	2021/03/23	DRAWN NAME:	
CHECKED	Tim	2021/03/23	DDR5 SODIMM Socket, Horizontal	
APPROVED	Ken	2021/03/23	4.0H, STD, G/F, Black, Reel, Solder PEG	
SCALE	1.25	SHEET	1/2	SIZE
				A4
FILE NAME		126A-40A00_B_1		



G  
F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8 9 10

