



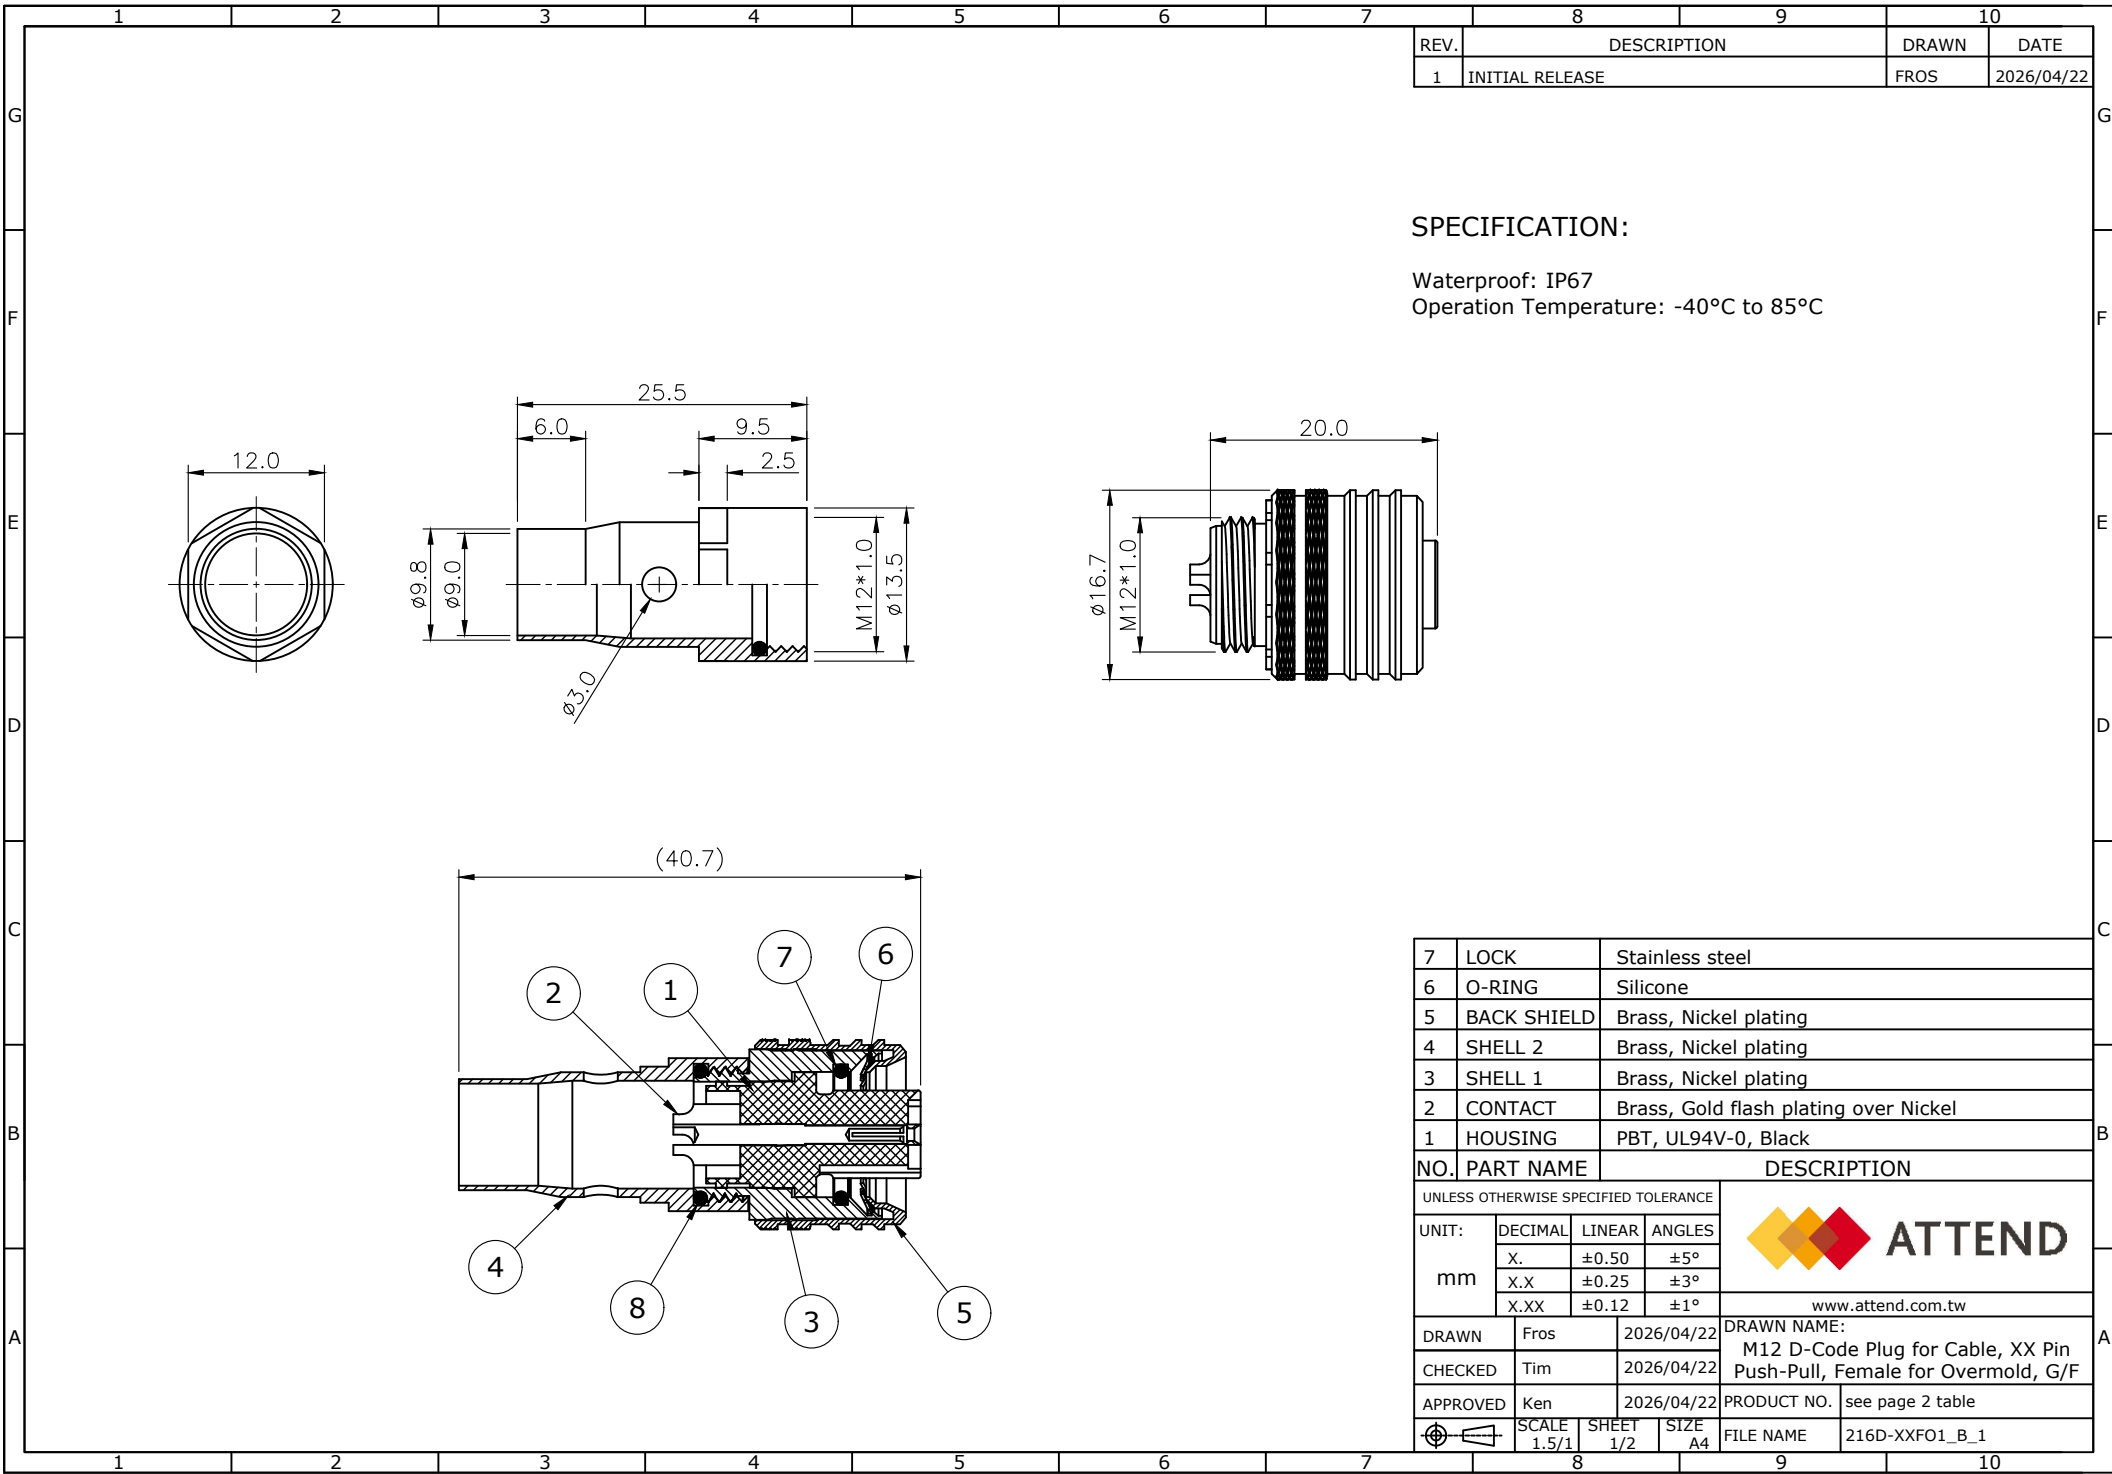



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2026/04/22

SPECIFICATION:

Waterproof: IP67
Operation Temperature: -40°C to 85°C


7	LOCK	Stainless steel	
6	O-RING	Silicone	
5	BACK SHIELD	Brass, Nickel plating	
4	SHELL 2	Brass, Nickel plating	
3	SHELL 1	Brass, Nickel plating	
2	CONTACT	Brass, Gold flash plating over Nickel	
1	HOUSING	PBT, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND
			www.attend.com.tw
DRAWN	Fros	2026/04/22	DRAWN NAME:
CHECKED	Tim	2026/04/22	M12 D-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F
APPROVED	Ken	2026/04/22	PRODUCT NO. see page 2 table
	SCALE 1.5/1	SHEET 1/2	SIZE A4
FILE NAME		216D-XXFO1_B_1	

							REV.	DESCRIPTION		DRAWN	DATE																																													
TABLE																																																								
																																																								
<u>216D-04FO1</u>		<u>216D-05FO1</u>																																																						
250V/4A		60V/4A																																																						
PBT UL94V-0		PBT UL94V-0																																																						
<table><tr><td colspan="4">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="2" rowspan="4"> ATTEND www.attend.com.tw</td></tr><tr><td>UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td>ANGLES</td></tr><tr><td rowspan="2">mm</td><td>X.</td><td>±0.50</td><td>±5°</td></tr><tr><td>X.X</td><td>±0.25</td><td>±3°</td></tr><tr><td></td><td>X.XX</td><td>±0.12</td><td>±1°</td></tr><tr><td>DRAWN</td><td colspan="2">Fros</td><td>2026/04/22</td><td colspan="4" rowspan="3">DRAWN NAME: M12 D-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F</td></tr><tr><td>CHECKED</td><td colspan="2">Tim</td><td>2026/04/22</td></tr><tr><td>APPROVED</td><td colspan="2">Ken</td><td>2026/04/22</td></tr><tr><td colspan="2"></td><td>SCALE 1.5/1</td><td>SHEET 2/2</td><td>SIZE A4</td><td>FILE NAME</td><td colspan="2">216D-XXFO1_B_1</td></tr></table>												UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw		UNIT:	DECIMAL	LINEAR	ANGLES	mm	X.	±0.50	±5°	X.X	±0.25	±3°		X.XX	±0.12	±1°	DRAWN	Fros		2026/04/22	DRAWN NAME: M12 D-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F				CHECKED	Tim		2026/04/22	APPROVED	Ken		2026/04/22			SCALE 1.5/1	SHEET 2/2	SIZE A4	FILE NAME	216D-XXFO1_B_1	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw																																																				
UNIT:	DECIMAL	LINEAR	ANGLES																																																					
mm	X.	±0.50	±5°																																																					
	X.X	±0.25	±3°																																																					
	X.XX	±0.12	±1°																																																					
DRAWN	Fros		2026/04/22	DRAWN NAME: M12 D-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F																																																				
CHECKED	Tim		2026/04/22																																																					
APPROVED	Ken		2026/04/22																																																					
		SCALE 1.5/1	SHEET 2/2	SIZE A4	FILE NAME	216D-XXFO1_B_1																																																		



216D-04FO1

250V/4A
PBT UL94V-0



216D-05FO1

60V/4A
PBT UL94V-0

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				www.attend.com.tw	
DRAWN	Fros	2026/04/22	DRAWN NAME: M12 D-Code Plug for Cable, XX Pin Push-Pull, Female for Overmold, G/F		
CHECKED	Tim	2026/04/22			
APPROVED	Ken	2026/04/22	PRODUCT NO. see page 2 table		
	SCALE 1.5/1	SHEET 2/2	SIZE A4	FILE NAME	216D-XXFO1_B_1