
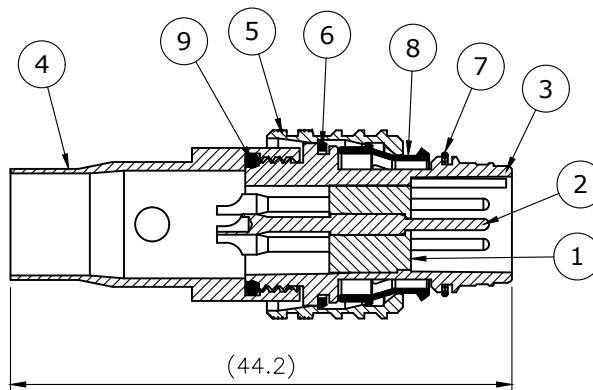
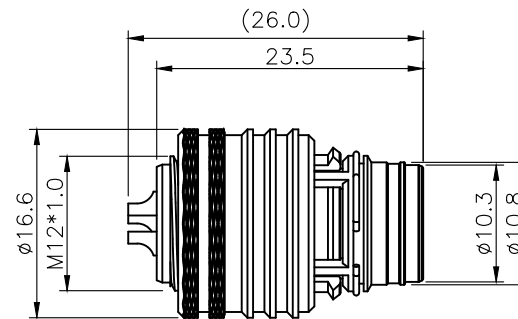
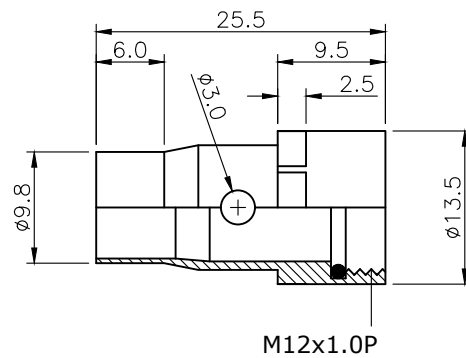


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2026/04/22

SPECIFICATION:

Waterproof: IP67
Operation Temperature: -40°C to 85°C






Assembly

9	O-RING	Silicone		
8	LOCK	PC, black		
7	SPRING 2	Stainless steel		
6	SPRING 1	Stainless steel		
5	LOCK RING	Brass, nickel plating over all		
4	Back SHIELD	Brass, nickel plating over all		
3	SHELL	Zinc alloy, nickel plating over all		
2	CONTACT	Brass, gold flash over nickel		
1	HOUSING	PA UL94V-0, black		
NO.	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND www.attend.com.tw		
UNIT:	DECIMAL		LINEAR	ANGLES
mm	X.		±0.50	±5°
	X.X		±0.25	±3°
	X.XX		±0.12	±1°
DRAWN	Fros	2026/04/22	DRAWN NAME: M12 D-Code Plug for Cable, XX Pin Push-Pull, Male for Overmold, G/F	
CHECKED	Tim	2026/04/22		
APPROVED	Ken	2026/04/22	PRODUCT NO.	see page 2 table
	SCALE 1.5/1	SHEET 1/2	SIZE A4	FILE NAME 216D-XXM01_B_1




www.attend.com.tw

							REV.	DESCRIPTION		DRAWN	DATE																																													
TABLE																																																								
																																																								
<u>216D-04MO1</u>		<u>216D-05MO1</u>																																																						
250V/4A		60V/4A																																																						
PA UL94V-0		PA UL94V-0																																																						
<table><tr><td colspan="4">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="2" rowspan="4"> ATTEND www.attend.com.tw</td></tr><tr><td>UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td>ANGLES</td></tr><tr><td rowspan="2">mm</td><td>X.</td><td>±0.50</td><td>±5°</td></tr><tr><td>X.X</td><td>±0.25</td><td>±3°</td></tr><tr><td></td><td>X.XX</td><td>±0.12</td><td>±1°</td></tr><tr><td>DRAWN</td><td colspan="2">Fros</td><td>2026/04/22</td><td colspan="2">DRAWN NAME:</td></tr><tr><td>CHECKED</td><td colspan="2">Tim</td><td>2026/04/22</td><td colspan="2">M12 D-Code Plug for Cable, XX Pin Push-Pull, Male for Overmold, G/F</td></tr><tr><td>APPROVED</td><td colspan="2">Ken</td><td>2026/04/22</td><td>PRODUCT NO.</td><td>see page 2 table</td></tr><tr><td></td><td>SCALE 1.5/1</td><td>SHEET 2/2</td><td>SIZE A4</td><td>FILE NAME</td><td>216D-XXMO1_B_1</td></tr></table>												UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw		UNIT:	DECIMAL	LINEAR	ANGLES	mm	X.	±0.50	±5°	X.X	±0.25	±3°		X.XX	±0.12	±1°	DRAWN	Fros		2026/04/22	DRAWN NAME:		CHECKED	Tim		2026/04/22	M12 D-Code Plug for Cable, XX Pin Push-Pull, Male for Overmold, G/F		APPROVED	Ken		2026/04/22	PRODUCT NO.	see page 2 table		SCALE 1.5/1	SHEET 2/2	SIZE A4	FILE NAME	216D-XXMO1_B_1
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw																																																				
UNIT:	DECIMAL	LINEAR	ANGLES																																																					
mm	X.	±0.50	±5°																																																					
	X.X	±0.25	±3°																																																					
	X.XX	±0.12	±1°																																																					
DRAWN	Fros		2026/04/22	DRAWN NAME:																																																				
CHECKED	Tim		2026/04/22	M12 D-Code Plug for Cable, XX Pin Push-Pull, Male for Overmold, G/F																																																				
APPROVED	Ken		2026/04/22	PRODUCT NO.	see page 2 table																																																			
	SCALE 1.5/1	SHEET 2/2	SIZE A4	FILE NAME	216D-XXMO1_B_1																																																			



216D-04MO1
 250V/4A
 PA UL94V-0



216D-05MO1
 60V/4A
 PA UL94V-0

UNLESS OTHERWISE SPECIFIED TOLERANCE						 ATTEND www.attend.com.tw	
UNIT:	DECIMAL	LINEAR	ANGLES				
mm	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
DRAWN	Fros	2026/04/22	DRAWN NAME:		M12 D-Code Plug for Cable, XX Pin		
CHECKED	Tim	2026/04/22	PRODUCT NO.		see page 2 table		
APPROVED	Ken	2026/04/22	FILE NAME		216D-XXMO1_B_1		
 SCALE 1.5/1		SHEET 2/2	SIZE A4				