


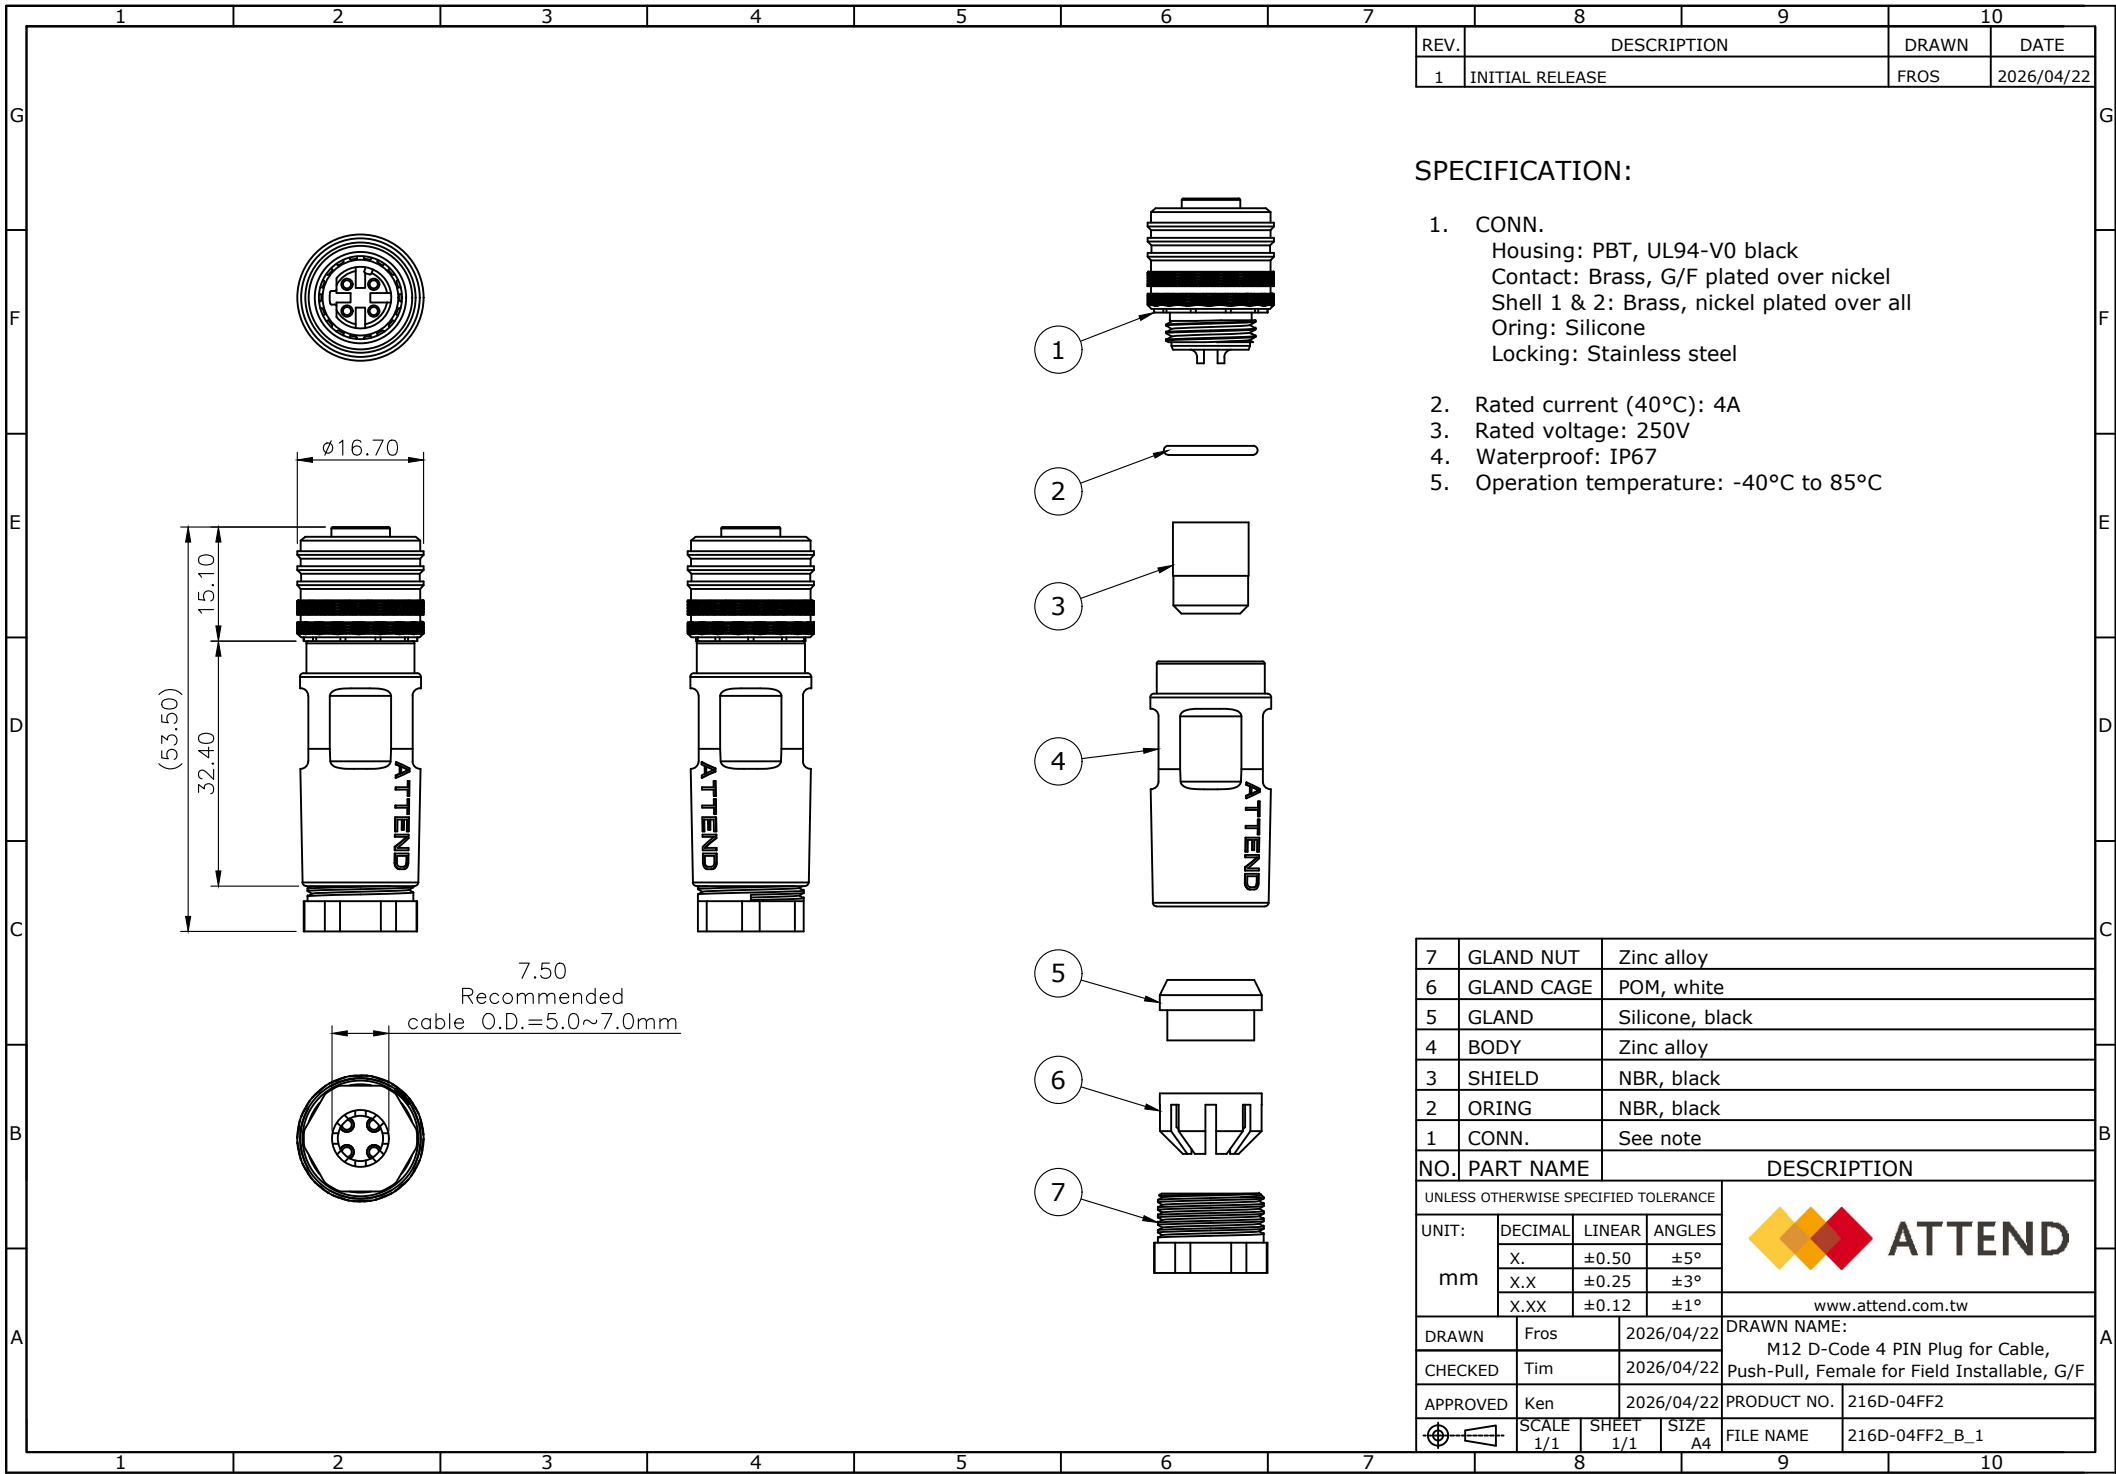

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2026/04/22

SPECIFICATION:

1. CONN.
Housing: PBT, UL94-V0 black
Contact: Brass, G/F plated over nickel
Shell 1 & 2: Brass, nickel plated over all
Oring: Silicone
Locking: Stainless steel
2. Rated current (40°C): 4A
3. Rated voltage: 250V
4. Waterproof: IP67
5. Operation temperature: -40°C to 85°C

7	GLAND NUT	Zinc alloy			
6	GLAND CAGE	POM, white			
5	GLAND	Silicone, black			
4	BODY	Zinc alloy			
3	SHIELD	NBR, black			
2	ORING	NBR, black			
1	CONN.	See note			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.attend.com.tw			
UNIT:	DECIMAL		LINEAR	ANGLES	
	X.		±0.50	±5°	
	X.X		±0.25	±3°	
	X.XX		±0.12	±1°	
DRAWN	Fros	2026/04/22	DRAWN NAME: M12 D-Code 4 PIN Plug for Cable, Push-Pull, Female for Field Installable, G/F		
CHECKED	Tim	2026/04/22			
APPROVED	Ken	2026/04/22			
	SCALE	SHEET	SIZE	PRODUCT NO.	216D-04FF2
	1/1	1/1	A4		