


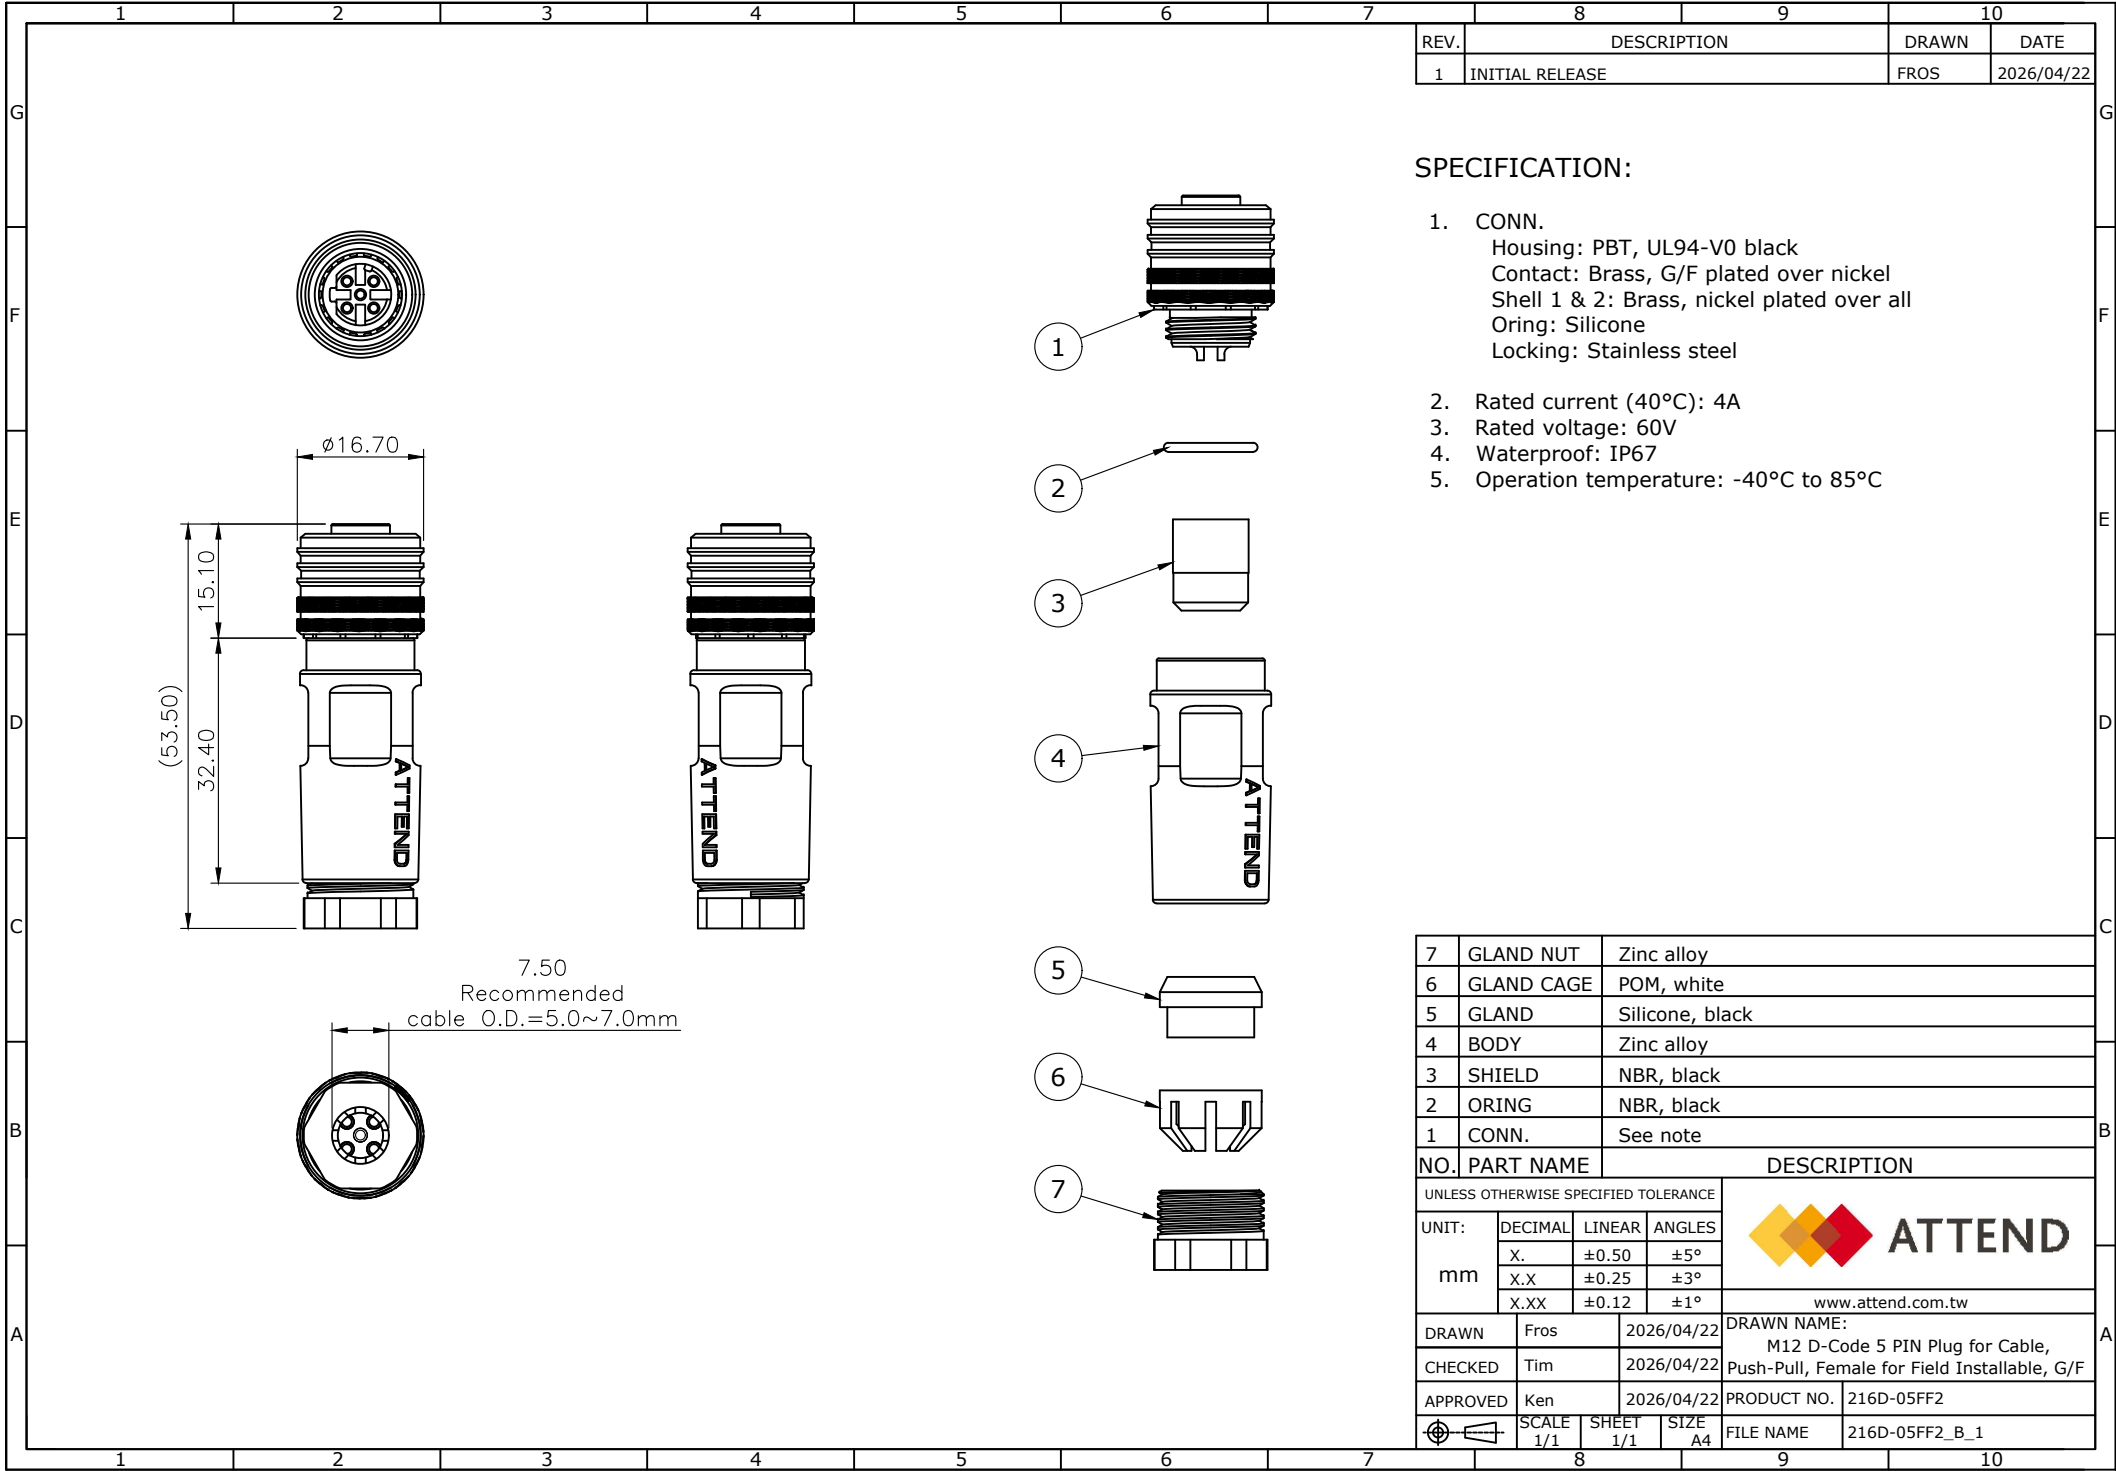

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2026/04/22

SPECIFICATION:

1. CONN.
Housing: PBT, UL94-V0 black
Contact: Brass, G/F plated over nickel
Shell 1 & 2: Brass, nickel plated over all
Oring: Silicone
Locking: Stainless steel
2. Rated current (40°C): 4A
3. Rated voltage: 60V
4. Waterproof: IP67
5. Operation temperature: -40°C to 85°C

7	GLAND NUT	Zinc alloy			
6	GLAND CAGE	POM, white			
5	GLAND	Silicone, black			
4	BODY	Zinc alloy			
3	SHIELD	NBR, black			
2	ORING	NBR, black			
1	CONN.	See note			
NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT: mm		DECIMAL	LINEAR	ANGLES	 ATTEND www.attend.com.tw
		X.	±0.50	±5°	
		X.X	±0.25	±3°	
		X.XX	±0.12	±1°	
DRAWN		Fros	2026/04/22	DRAWN NAME: M12 D-Code 5 PIN Plug for Cable, Push-Pull, Female for Field Installable, G/F	
CHECKED		Tim	2026/04/22		
APPROVED		Ken	2026/04/22	PRODUCT NO.	216D-05FF2
		SCALE 1/1	SHEET 1/1	SIZE A4	FILE NAME 216D-05FF2_B_1