

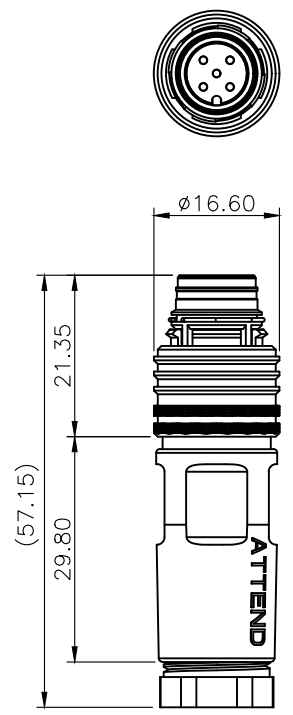


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

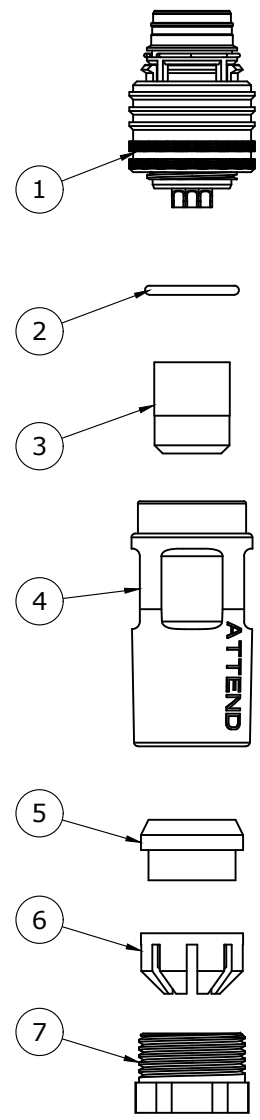

7.50  
Recommended  
cable O.D.=5.0~7.0mm



**Note:**

- CONN.  
Housing: PA, UL94-V0 black  
Contact: Brass, G/F plated over nickel  
Shell: Zinc alloy, nickel plated over all  
Locking: PC, black  
Locking Ring: Brass, nickel plated over all  
Spring 1 & 2: Stainless steel
- Rated current (40°C): 4A
- Rated voltage: 60V
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

7	GLAND NUT	Zinc alloy
6	GLAND CAGE	POM, white
5	GLAND	Silicone, black
4	BODY	Zinc alloy
3	SHIELD	NBR, black
2	ORING	NBR, black
1	CONN.	See Note

NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	mm	X. ±0.50	X.X ±3°
		X.XX ±0.25	X.XX ±1°
DRAWN		Fros	2025/12/29
CHECKED		Tim	2025/12/29
APPROVED		Ken	2025/12/29
SCALE		1/1	SHEET 1/1
SIZE		A4	
DRAWN NAME:		M12 A-Code 5 PIN Plug for Cable, Push-Pull, Male for Field Installable, G/F	
PRODUCT NO.		216A-05MF2	
FILE NAME		216A-05MF2_B_1	



www.attend.com.tw