
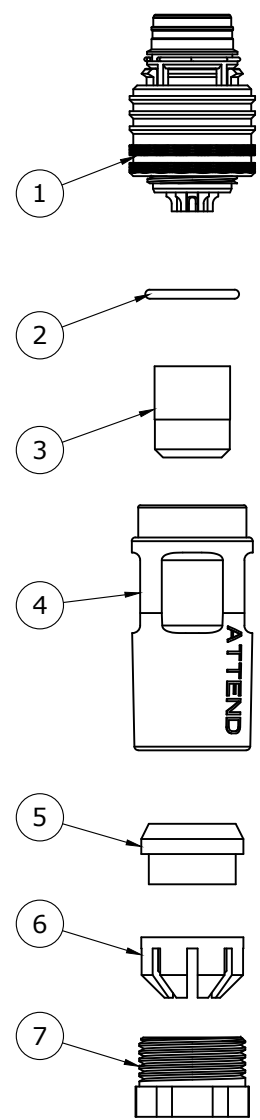
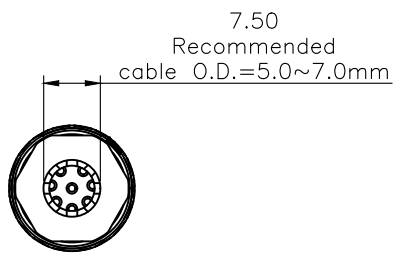


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

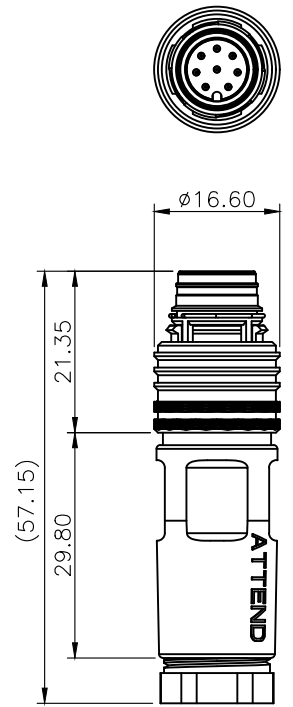

Note:

- CONN.
Housing: PA, UL94-V0 black
Contact: Brass, G/F plated over nickel
Shell: Zinc alloy, nickel plated over all
Locking: PC, black
Locking Ring: Brass, nickel plated over all
Spring 1 & 2: Stainless steel
- Rated current (40°C): 2A
- Rated voltage: 30V
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

7	GLAND NUT	Zinc alloy
6	GLAND CAGE	POM, white
5	GLAND	Silicone, black
4	BODY	Zinc alloy
3	SHIELD	NBR, black
2	ORING	NBR, black
1	CONN.	See Note

NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	mm	X. ±0.50	X.X ±5°
		X.X ±0.25	X.XX ±3°
		X.XX ±0.12	X.XX ±1°
DRAWN			Fros 2025/12/29
CHECKED			Tim 2025/12/29
APPROVED			Ken 2025/12/29
SCALE			1/1
SHEET			1/1
SIZE			A4
DRAWN NAME:		M12 A-Code 8 PIN Plug for Cable, Push-Pull, Male for Field Installable, G/F	
PRODUCT NO.		216A-08MF2	
FILE NAME		216A-08MF2_B_1	



www.attend.com.tw