




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

Note:



- CONN.
Housing: NYLON 66, UL94-V0 black
Contact: Brass, G/F plated over nickel
Shell 1 & 2: Brass, nickel plated over all
Oring: Silicone
Locking: Stainless steel
- Rated current (40°C): 1.5A
- Rated voltage: 30V
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

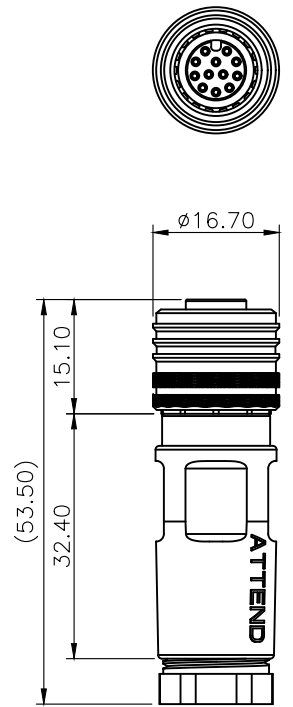

7.50
Recommended
cable O.D.=5.0~7.0mm

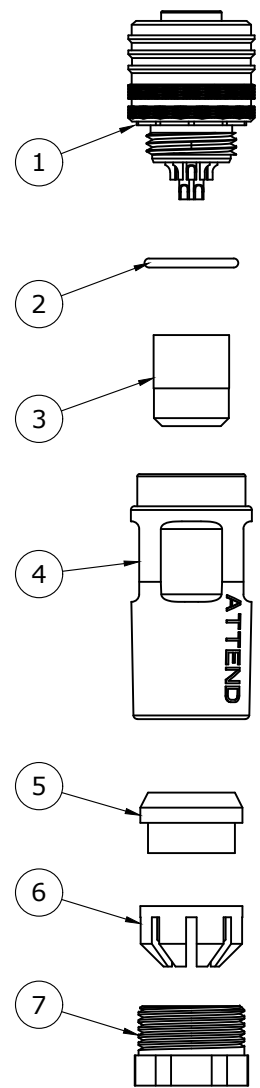

NO.	PART NAME	DESCRIPTION
7	GLAND NUT	Zinc alloy
6	GLAND CAGE	POM, white
5	GLAND	Silicone, black
4	BODY	Zinc alloy
3	SHIELD	NBR, black
2	ORING	NBR, black
1	CONN.	See Note

UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°	www.attend.com.tw	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2025/12/29	DRAWN NAME: M12 A-Code 12 PIN Plug for Cable, Push-Pull, Female for Field Installable, G/F		
CHECKED	Tim	2025/12/29	PRODUCT NO. 216A-12FF2		
APPROVED	Ken	2025/12/29	FILE NAME 216A-12FF2_B_1		
	SCALE 1/1	SHEET 1/1	SIZE A4		