




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/12/29

Note:


- CONN.
Housing: PA, UL94-V0 black
Contact: Brass, G/F plated over nickel
Shell: Zinc alloy, nickel plated over all
Locking: PC, black
Locking Ring: Brass, nickel plated over all
Spring 1 & 2: Stainless steel
- Rated current (40°C): 0.5A
- Rated voltage: 50VAC / 60VDC
- Waterproof: IP67
- Operation temperature: -40°C to 85°C

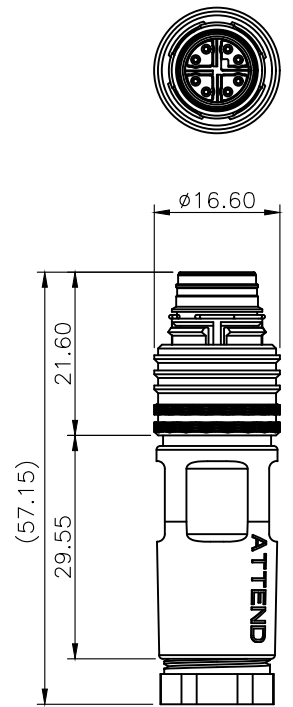

7.50
Recommended
cable O.D.=5.0~7.0mm

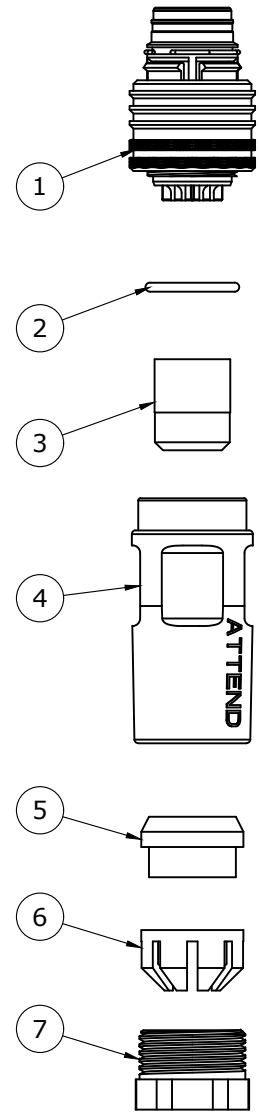

NO.	PART NAME	DESCRIPTION
7	GLAND NUT	Zinc alloy
6	GLAND CAGE	POM, white
5	GLAND	Silicone, black
4	BODY	Zinc alloy
3	SHIELD	NBR, black
2	ORING	NBR, black
1	CONN.	See Note

NO.		PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE						
UNIT:	DECIMAL	LINEAR	ANGLES	 www.attend.com.tw		
	mm	X.	±0.50			±5°
		X.X	±0.25			±3°
		X.XX	±0.12			±1°
DRAWN	Fros	2025/12/29	DRAWN NAME:			
CHECKED	Tim	2025/12/29	M12 X-Code 8 PIN Plug for Cable, Push-Pull, Male for Field Installable, G/F			
APPROVED	Ken	2025/12/29	PRODUCT NO.	216X-08MF2		
SCALE		SHEET	SIZE	FILE NAME	216X-08MF2_B_1	
1/1		1/1	A4			