


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/08/07


NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance
3. Characteristic impedance: 50 Ω
4. Operating temperature range: -40°C~ +105°C
5. Waterproof Rating: IP67 (in mated condition)

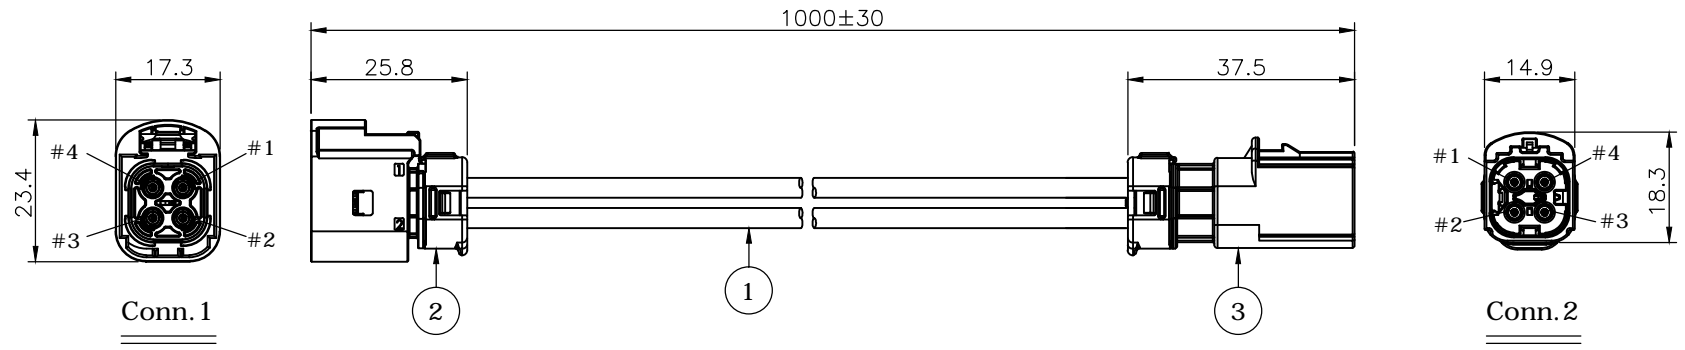

PIN ASSIGNMENT

Conn. 1		Conn. 2
1	—————	1
2	—————	2
3	—————	3
4	—————	4
Shield	—————	Shield

3	1PC	CONN., Mini FAKRA, Type B Plug(2x2), Gold plated 6u"	
2	1PC	CONN., Mini FAKRA, Type B Jack(2x2), Gold plated 30u"	
1	4PCS	Coaxial Cable, RTK031, 22AWG+ AB, OD3.3, PVC, Black	
NO.	Q'ty	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	1~10 ±1	> 401 ±10	
	11~30 ±2	ANGLE ±5°	
mm	31~50 ±3		
	51~200 ±5		
			
		www.attend.com.tw	
DRAWN	Tim	2025/08/07	DRAWN NAME:
CHECKED	Fros	2025/08/07	Mini FAKRA, Type B, Jack (2x2) to Plug (2x2) Cable, IP67, L=100 CM, Z Code
APPROVED	Allen	2025/08/07	CUSTOMER NO.
		SCALE	PRODUCT NO.
		0.8	FR-1J1P-100Z05W
		SHEET	
		1/1	
		SIZE	
		A4	