


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	Fros	2025/05/08
2	Revised wire spec, open end	Fros	2025/06/19

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

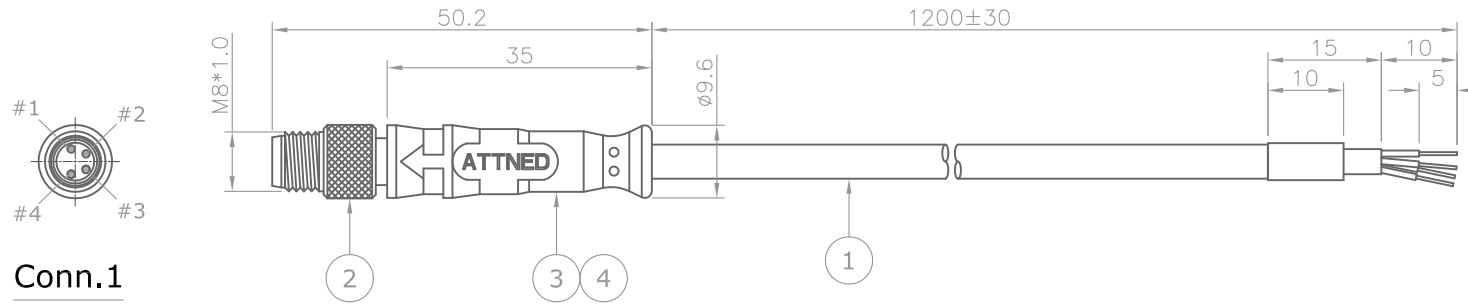

Conn.1

PIN ASSIGNMENT

Conn.1

- 1 Red
- 2 Black
- 3 Orange
- 4 Brown

4	xg	Over Mold, PVC 50P, Black, T/N:HY-HX-0302	
3	xg	Inner Mold, PE, T/N:HY-HX-0301	
2	1PC	CONN., M8-A Code 4Pin Male, P/N: 219A-04MO0	
1	1PC	Cable, UL2464 #22AWG x 4C+AL PVC JACKET, OD:4.5, Black	
NO. Q'ty		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE		ATTEND www.attend.com.tw	
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5		
mm			
DRAWN	Fros	2025/05/08	DRAWN NAME: M8 A-code 4pin male to open end L=120 CM
CHECKED	Allen	2025/05/08	
APPROVED	Ken	2025/05/08	CUSTOMER NO.
	SCALE 1/1	SHEET 1/1	SIZE A4
PRODUCT NO.		M8-4P00-12001	