


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	Fros	2025/05/08
2	Revised wire spec, open end	Fros	2025/06/19

NOTES:

- 1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
- 2. RoHS compliance

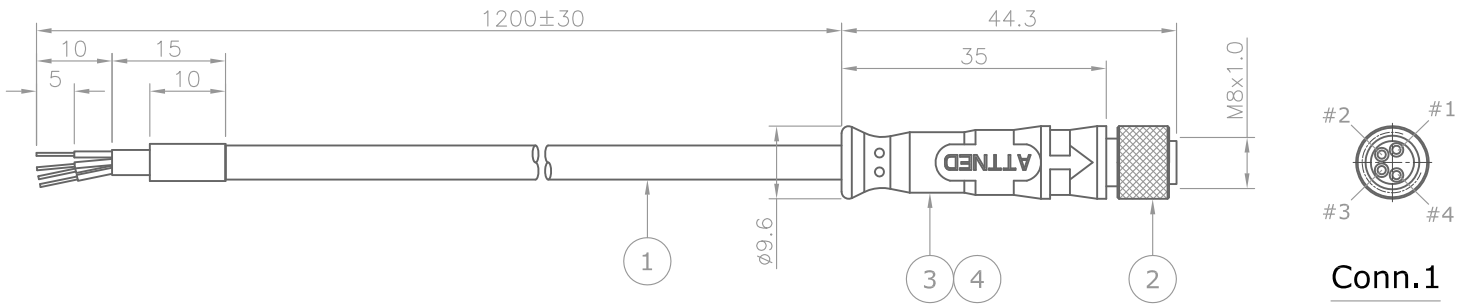

PIN ASSIGNMENT

Conn.1

- 1 Red
- 2 Black
- 3 Orange
- 4 Brown

4	xg	Over Mold, PVC 50P, Black, T/N:HY-HX-0304
3	xg	Inner Mold, PE, T/N:HY-HX-0303
2	1PC	CONN., M8-A Code 4Pin Female, P/N: 219A-04FO0
1	1PC	Cable, UL2464 #22AWG x 4C+AL PVC JACKET, OD:4.5, Black
NO. Q'ty		DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5	>401 ±10 ANGLE ±5°
mm		
www.attend.com.tw		
DRAWN	Fros	2025/05/08
CHECKED	Allen	2025/05/08
APPROVED	Ken	2025/05/08
DRAWN NAME: M8 A-code 4pin Female to open end L=120 CM		
		CUSTOMER NO.
SCALE N/A	SHEET 1/1	SIZE A4
PRODUCT NO.		M8-4R00-12001