

DATE CODE: 18101 (YYWWDD)
YY: YEAR (2018)
WW: WEEK (01~52)
D: DAY (1~7)

REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	FROS	2019/05/30

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 0.6A per pin
- 1.2 Voltage Rating: 25V AC
- 1.3 Contact Resistance: 60mΩ max.
- 1.4 Insulation Resistance: 100MΩ
- 1.5 Dielectric Withstanding Voltage: 500VAC

2. MECHANICAL





- 2.1 Durability: 50 Cycle
- 2.2 Insertion Force: 59.8N max.
- 2.3 Extraction Force: 44.6N max.

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C~+85°C
- 3.2 Storage temperature range: -40°C~+85°C

4. SOLDER ABILITY


- 4.1 Recommended IR-Reflow Temperature: 260°C

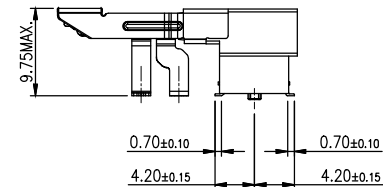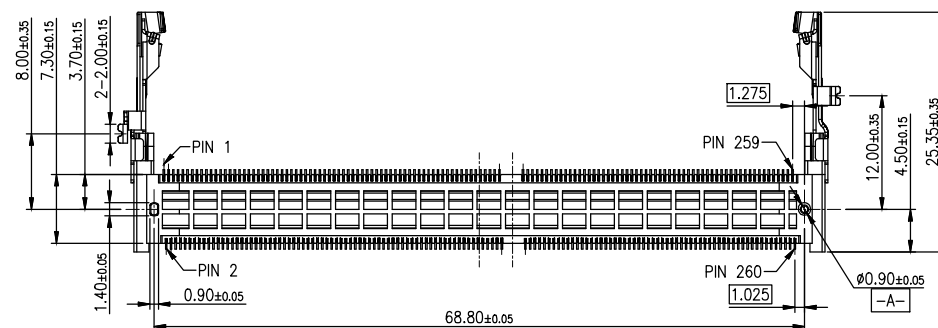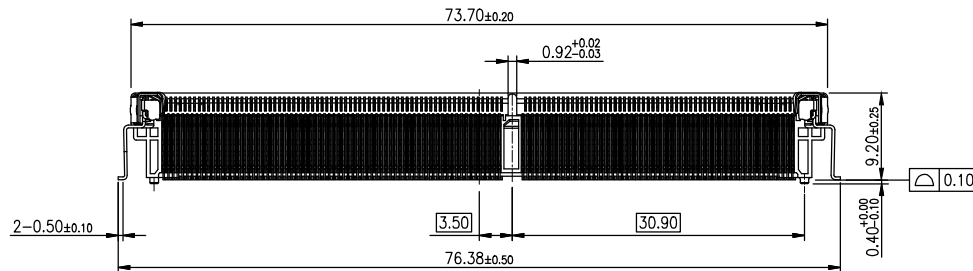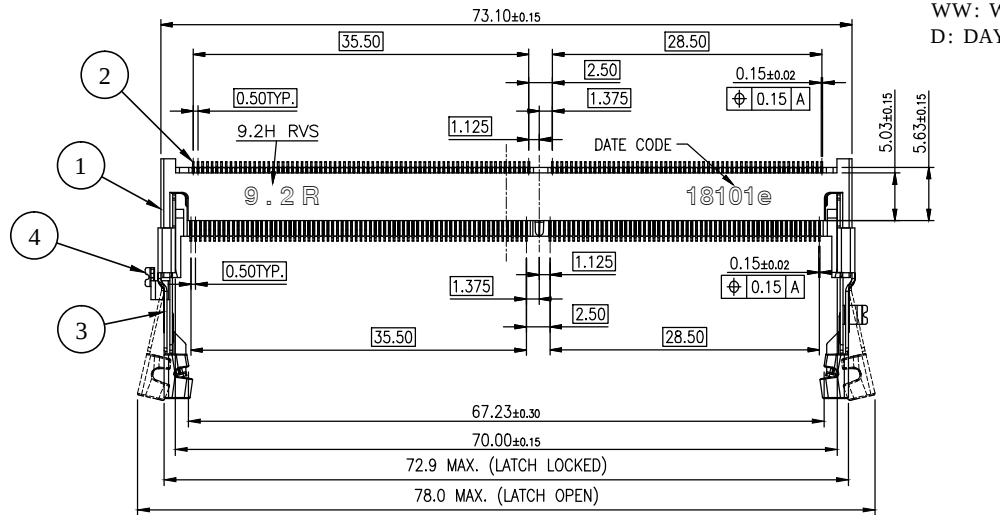


4	PEG	Stainless steel, 50u" min. tin plating over 50u" min. nickel plating
3	LATCH	Stainless steel
2	CONTACT	Copper alloy, contact area gold flash, solder area gold flash, under plating 50u" min. nickel
1	HOUSING	LCP, UL94V-0, black

NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
m m				www.attend.com.tw	
DRAWN		Fros		2019/05/30	
CHECKED		Tim		2019/05/30	
APPROVED		Ken		2019/05/30	
		SCALE 1.25/1		SHEET 1/2	
				SIZE A4	
				PRODUCT NO.	
				124A-92A13	
				FILE NAME	
				124A-92A13_B_1	


REV.	DESCRIPTION	DRAWN	DATE
	SEE SHEET ONE		

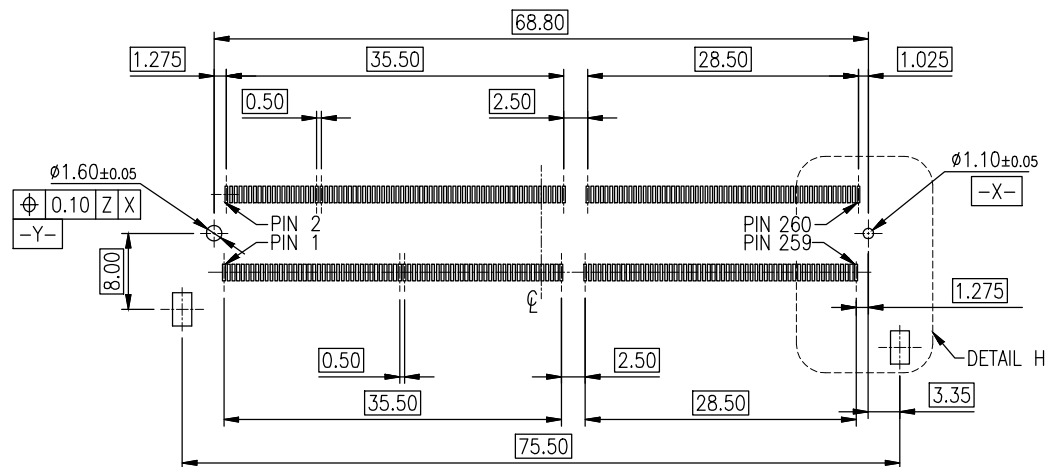

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ± 0.05

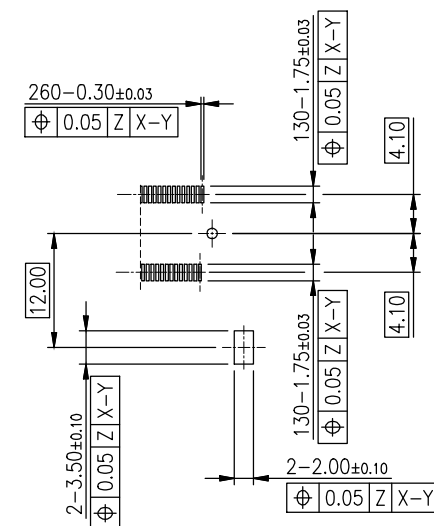

DETAIL H
SCALE 1/1



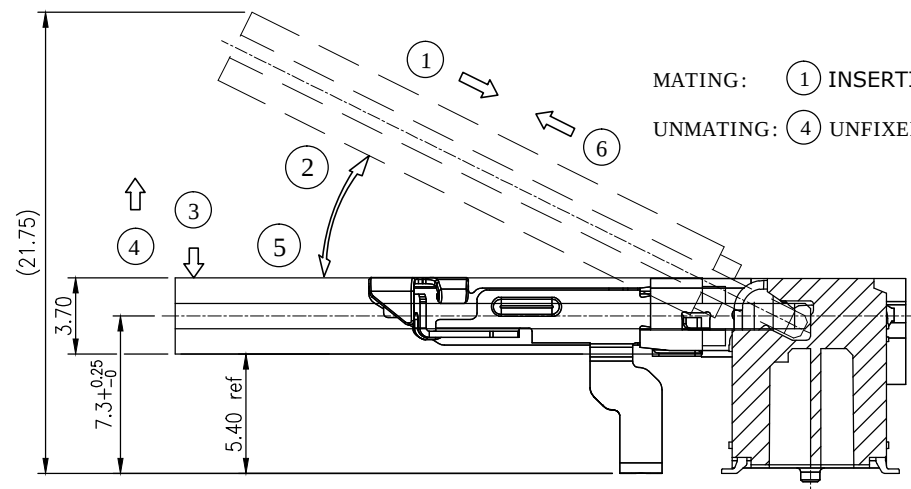


MATING/UNMATING VIEW

MATING: ① INSERTING(25°) → ② ROTATING(0°) → ③ FIXED
UNMATING: ④ UNFIXED → ⑤ RISE UP (25°) → ⑥ EXTRACTING

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				www.attend.com.tw	
DRAWN	Fros		2019/05/30	DRAWN NAME: DDR4 SODIMM Socket, Horizontal 9.2H, RVS, G/F, Black, Reel, Solder PEG	
CHECKED	Tim		2019/05/30		
APPROVED	Ken		2019/05/30	PRODUCT NO.	124A-92A13
	SCALE 1.6/1	SHEET 2/2	SIZE A4	FILE NAME	124A-92A13_B_1

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2019/06/10

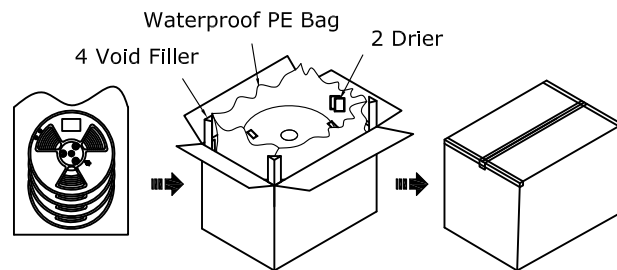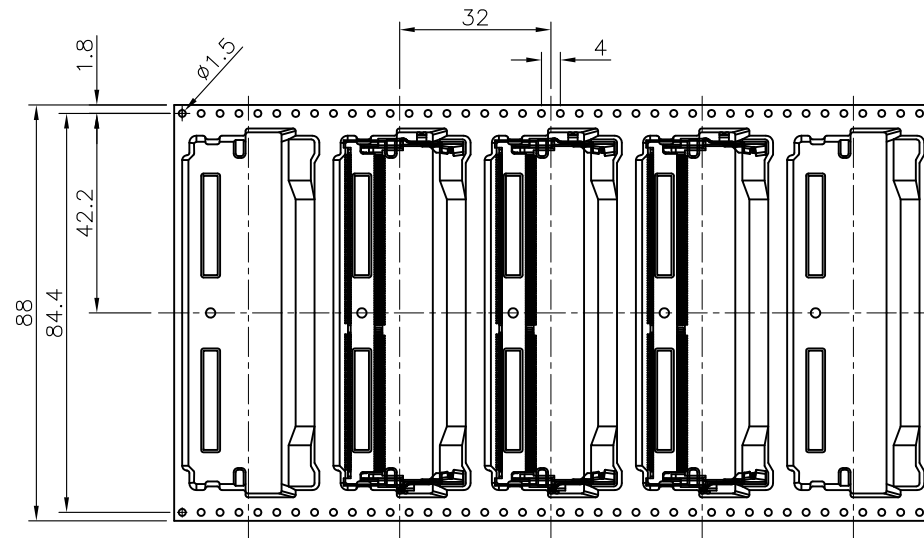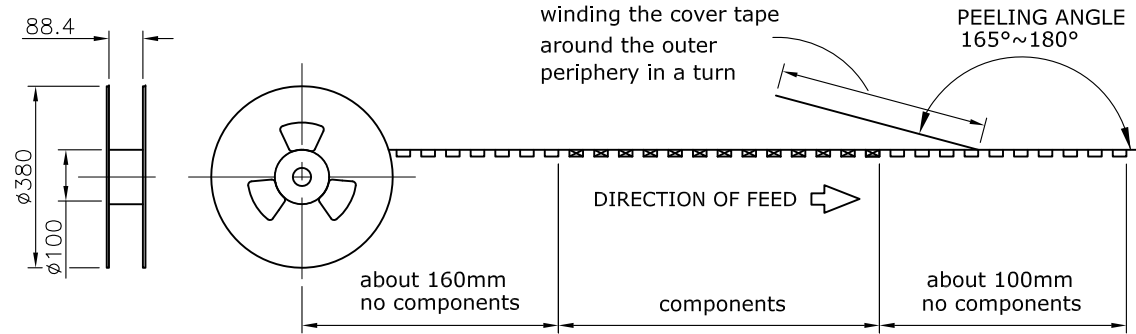

Carton L*W*H=405*405*320

PACKAGING SPECIFICATION:

1. MATERIAL

1.1 Embossed Carrier Tape: PS Black

1.2 Top Cover Tape: PET
20-80g(Peel Speed 300mm/Minute)

1.3 Taping Reel: Plastic

P/N		REEL	CARTON
124A-92A03		270PCS	810PCS
124A-92A13		270PCS	810PCS
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN		Fros	2019/06/10
CHECKED		Tim	2019/06/10
APPROVED		Ken	2019/06/10
SCALE		1/1	SHEET 1/1
SIZE		A4	FILE NAME
DRAWN NAME:		DDR4 SODIMM Socket, Horizontal 9.2H, G/F, Reel, Solder Latch	
PRODUCT NO.		SEE TABLE	
FILE NAME		124A-92AX3_D_1	

