




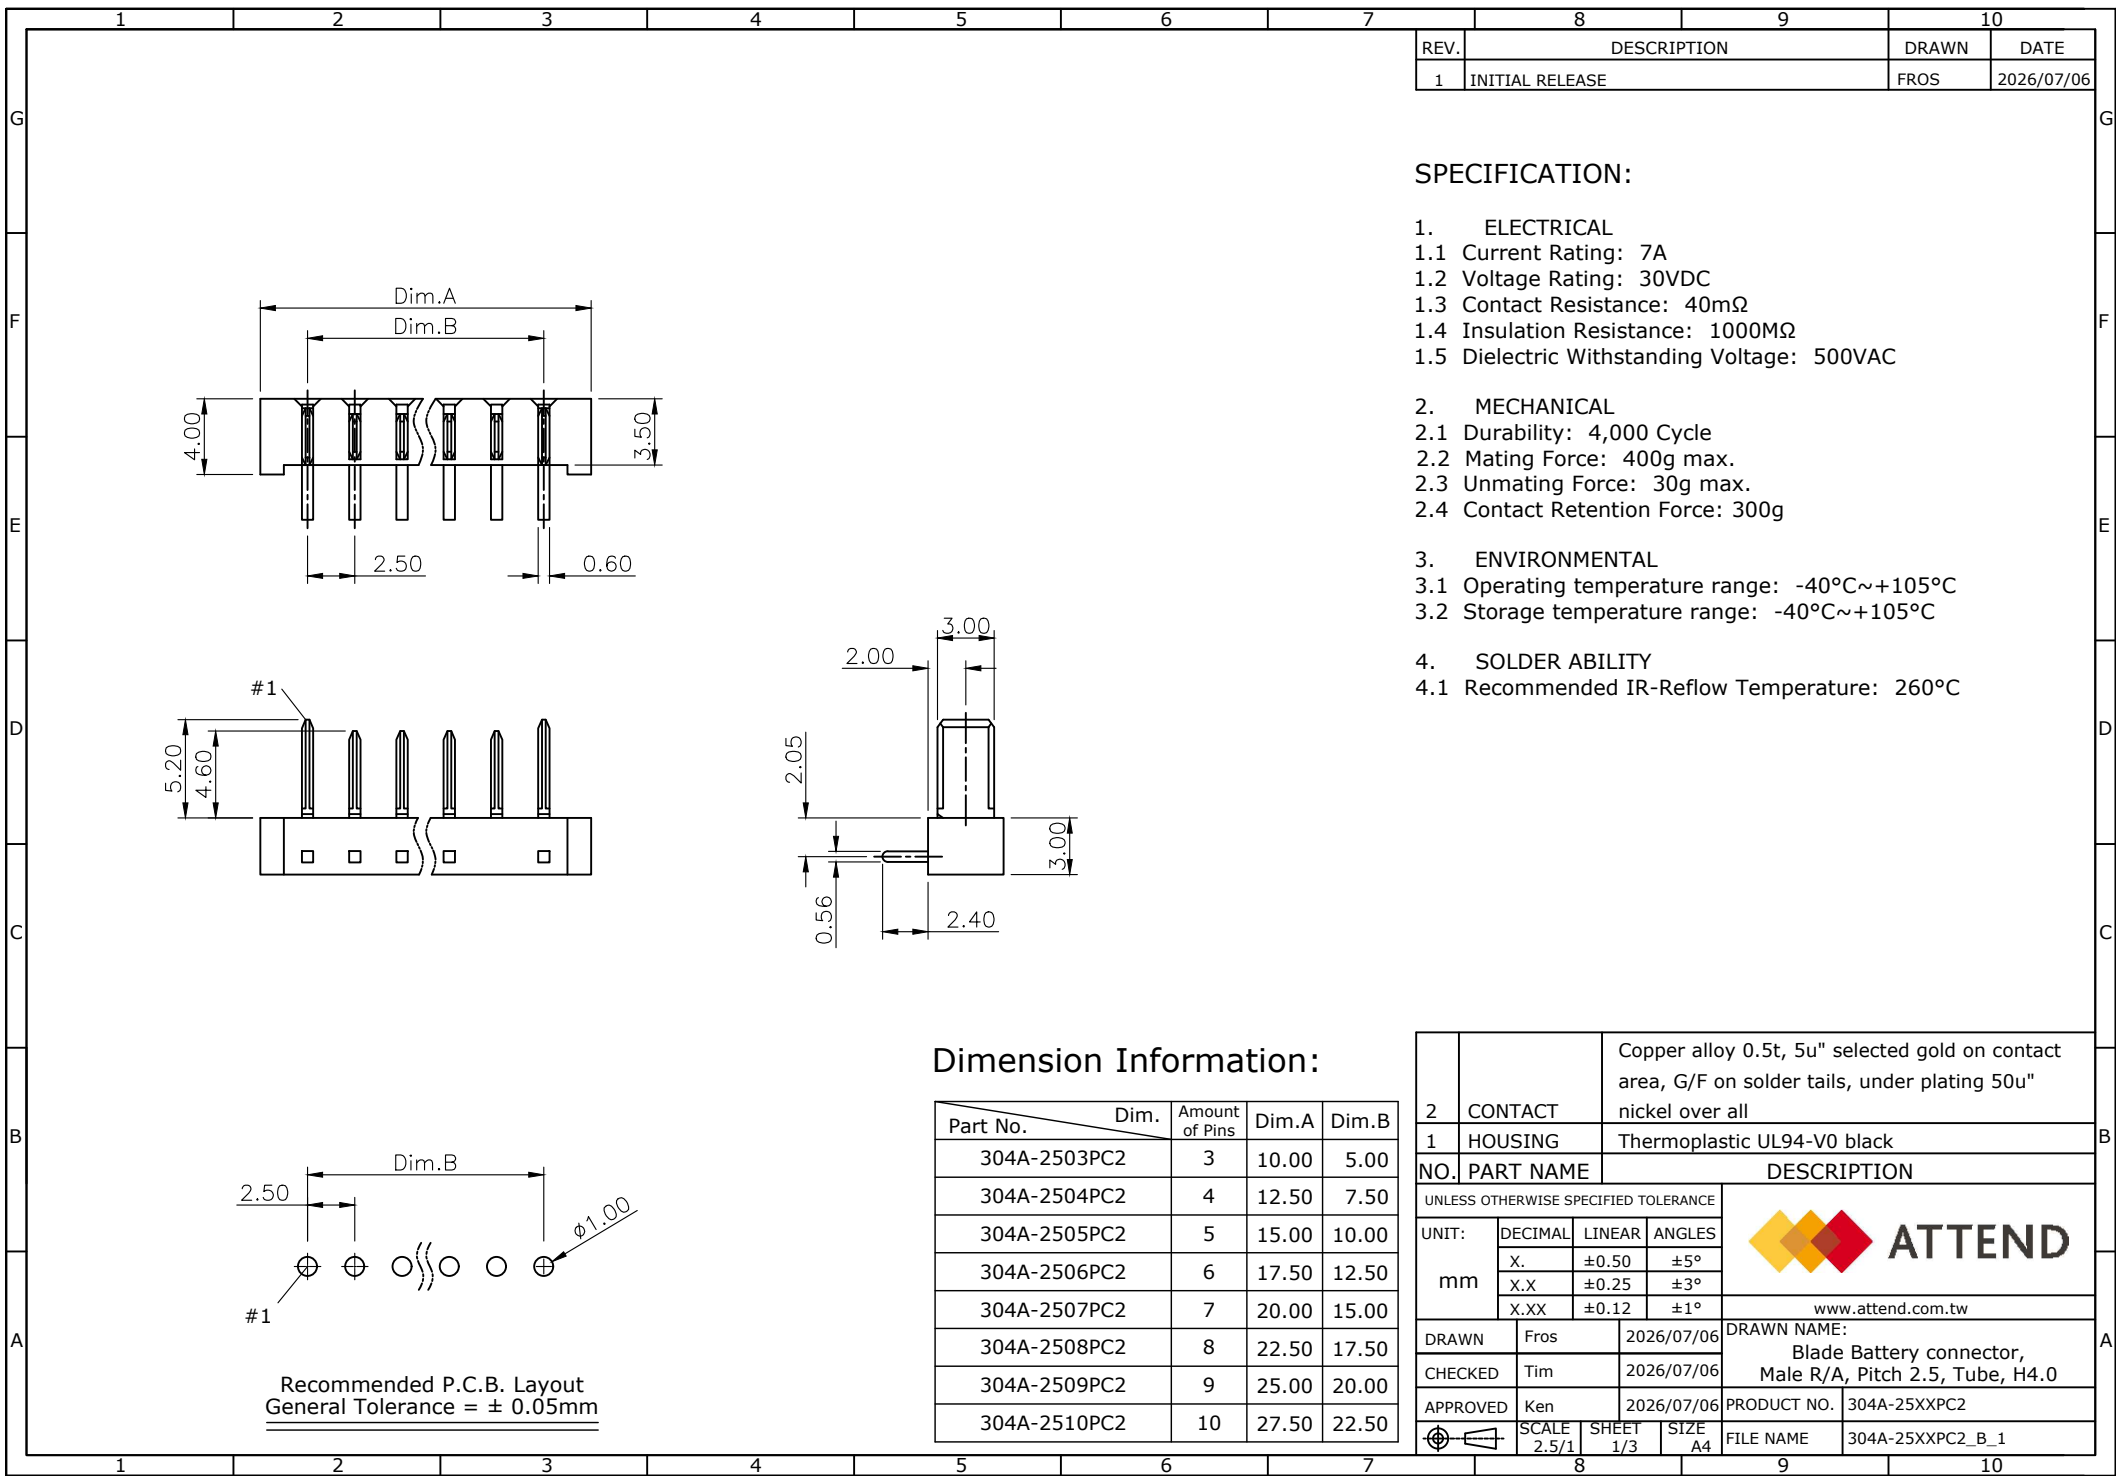

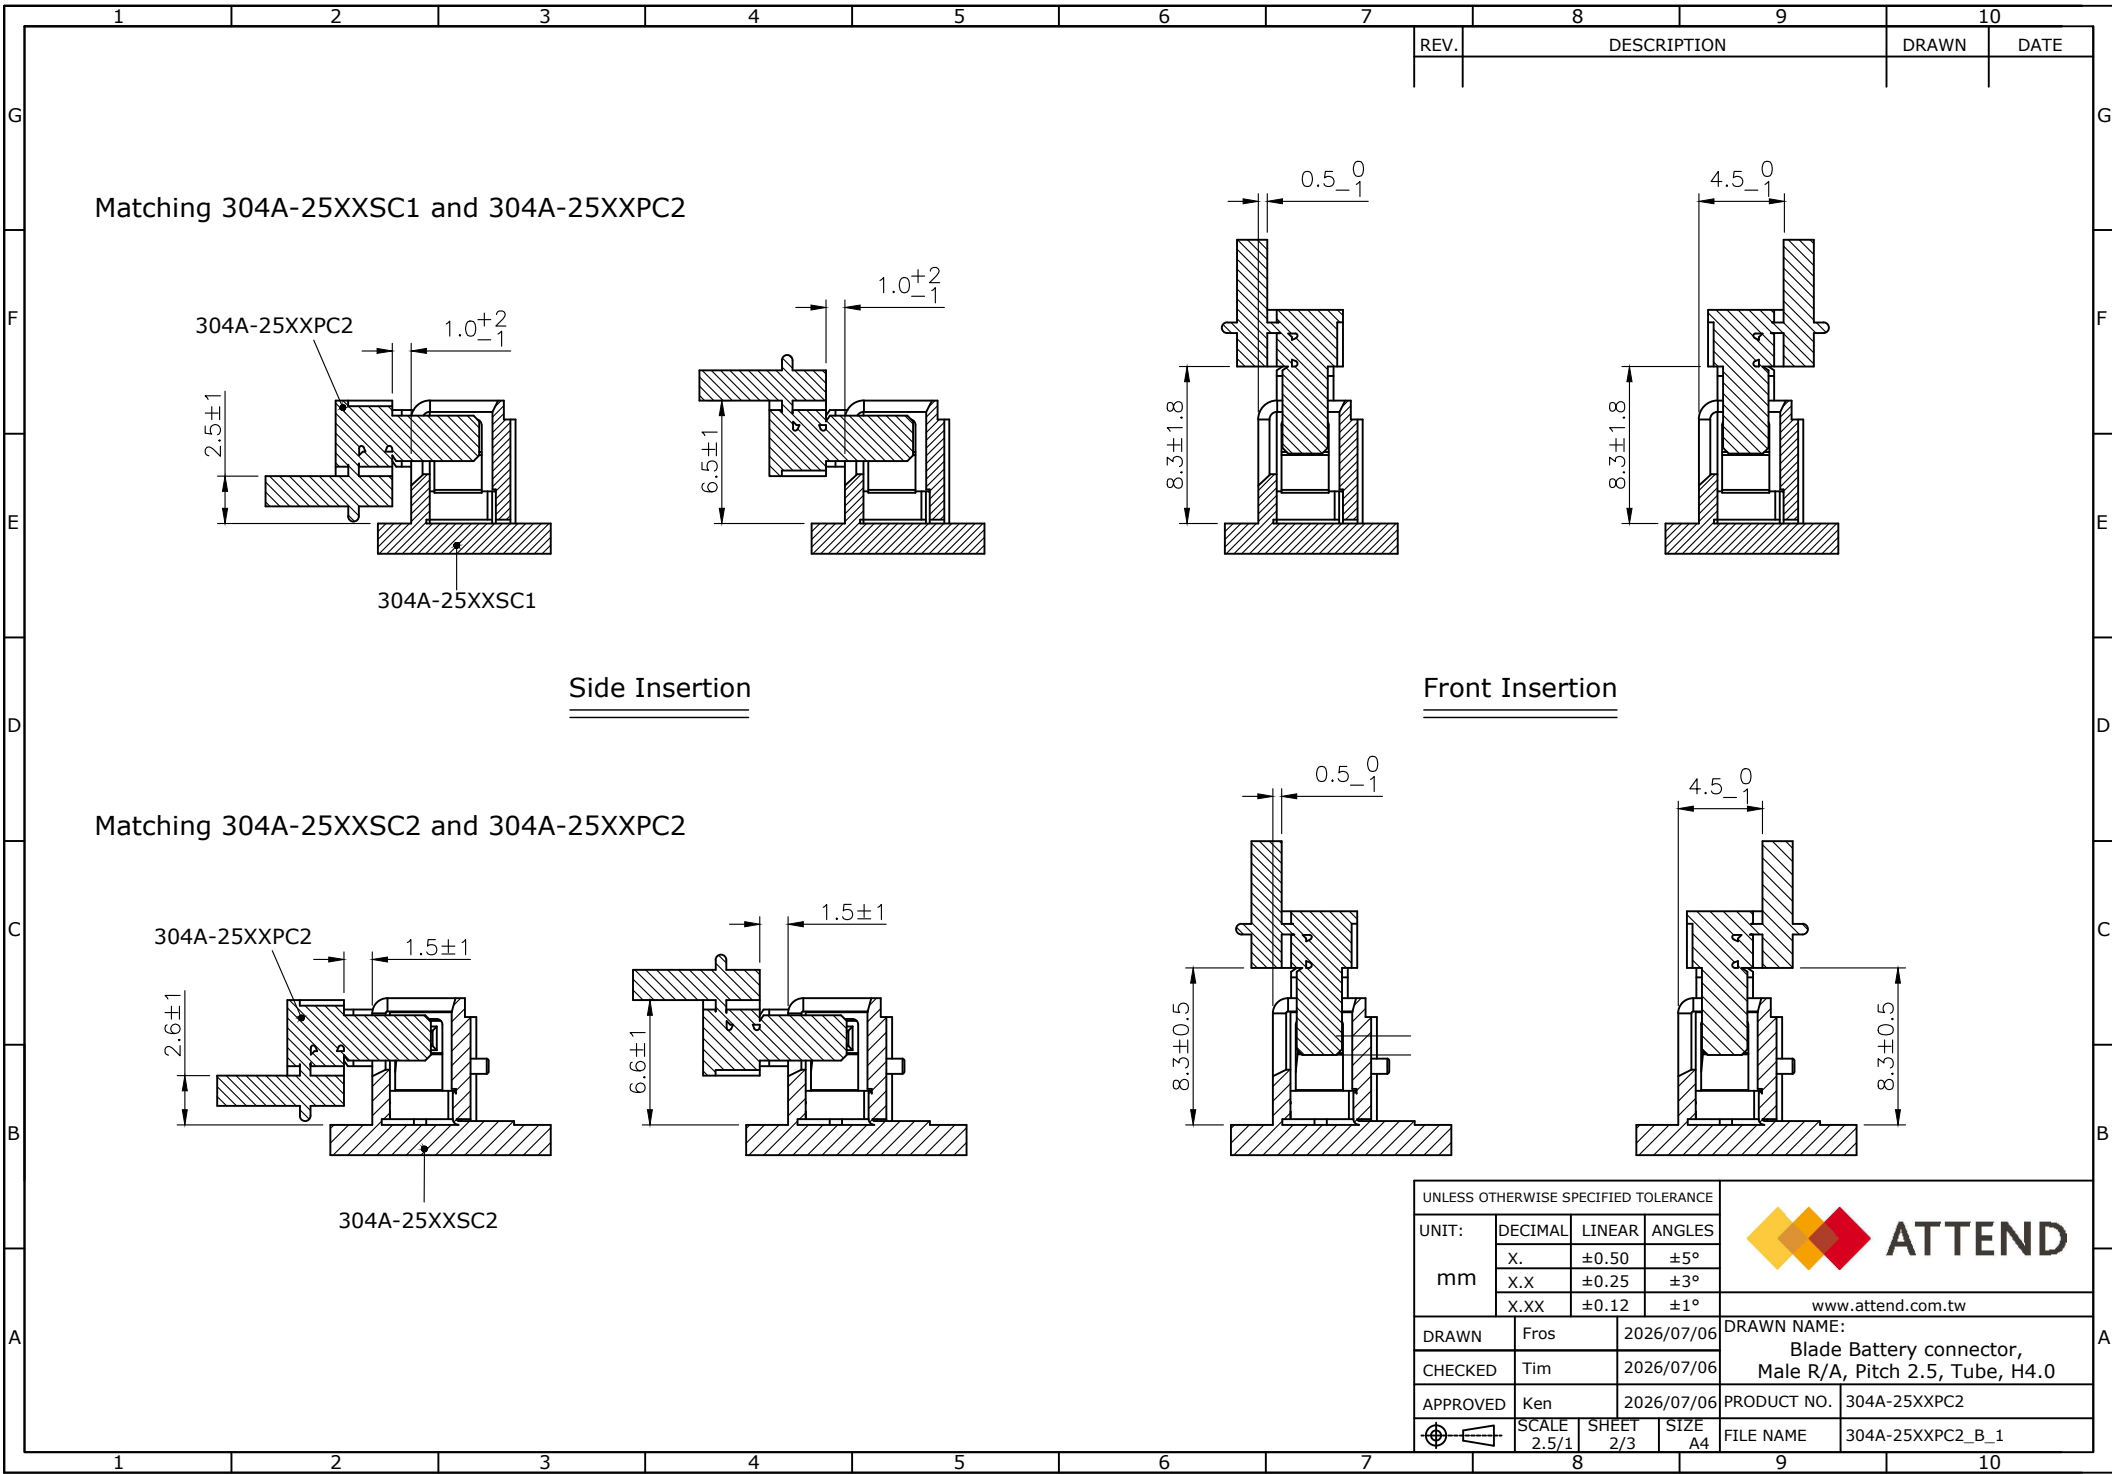


UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Fros	2026/07/06		DRAWN NAME: Blade Battery connector, Male R/A, Pitch 2.5, Tube, H4.0		
CHECKED	Tim	2026/07/06		PRODUCT NO. 304A-25XXPC2		
APPROVED	Ken	2026/07/06		FILE NAME 304A-25XXPC2_B_1		
	SCALE 2.5/1	SHEET 2/3	SIZE A4			

Matching 304A-25XXSC3 and 304A-25XXPC2

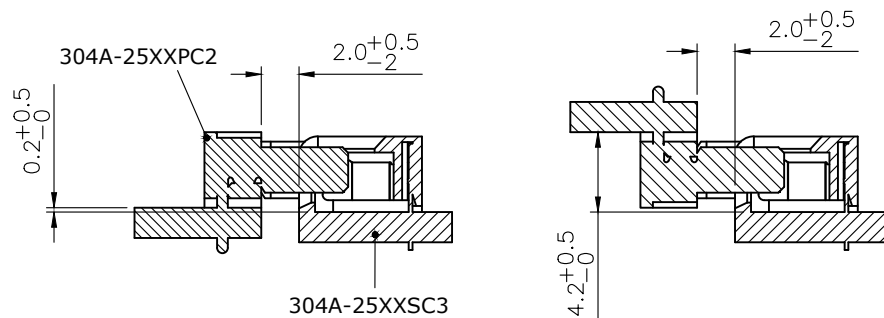

Side Insertion

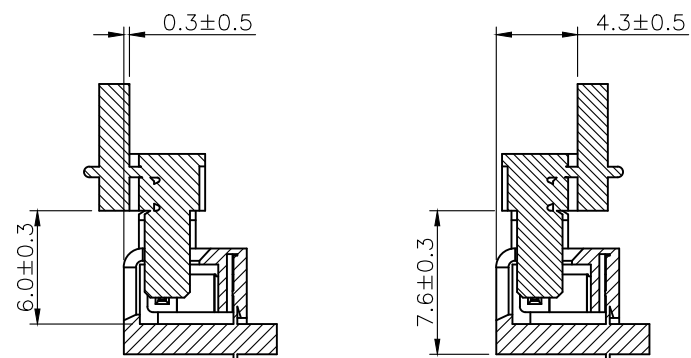

Front Insertion

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES			www.attend.com.tw
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
mm						
DRAWN	Fros	2026/07/06	DRAWN NAME: Blade Battery connector, Male R/A, Pitch 2.5, Tube, H4.0			
CHECKED	Tim	2026/07/06	PRODUCT NO. 304A-25XXPC2			
APPROVED	Ken	2026/07/06	FILE NAME 304A-25XXPC2_B_1			
	SCALE 2.5/1	SHEET 3/3	SIZE A4			