

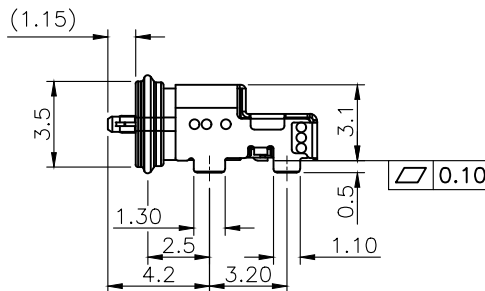

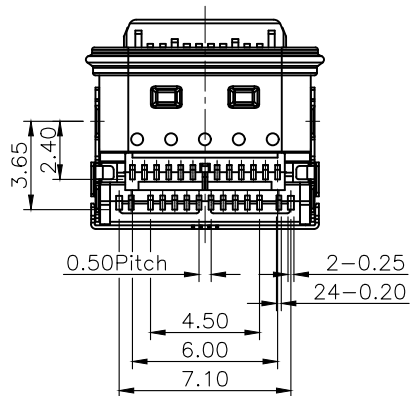
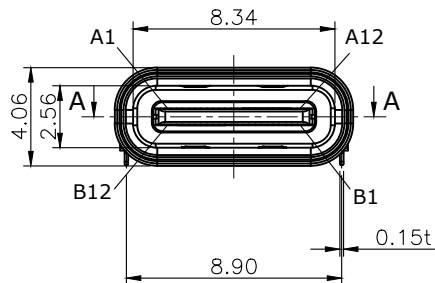


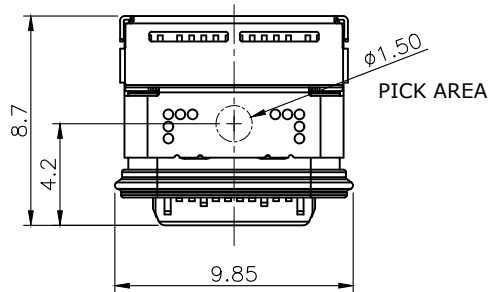

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2023/03/13
2	ECR260417001	Fros	2026/04/17

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 3A
- 1.2 Voltage Rating: 20V AC/DC
- 1.3 Contact Resistance: 40mΩ
- 1.4 Insulation Resistance: 100MΩ
- 1.5 Dielectric Withstanding Voltage: 100VAC

2. MECHANICAL

- 2.1 Durability: 10,000 Cycle
- 2.2 Mating Force: 5N to 20N
- 2.3 Un-mating Force: 8N to 20N



3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C to +105°C
- 3.2 Storage temperature range: -40°C to +105°C


4. SOLDER ABILITY

- 4.1 Recommended IR Reflow Temperature: 260°C

4	O-RING	Silicone	
3	SHELL	Stainless steel, Nickel plating	
2	CONTACT	Copper alloy, Gold plating over Nickel	
1	HOUSING	PA46, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT: mm	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND
			www.attend.com.tw
DRAWN	Tim	2023/03/13	DRAWN NAME: USB Type C Receptacle, Dual Row SMT Type, G/F, IP67 Waterproof
CHECKED	Fros	2023/03/13	
APPROVED	Ken	2023/03/13	
		PRODUCT NO.	217B-BA06
	SCALE 3.2/1	SHEET 1/2	SIZE A4
		FILE NAME	217B-BA06_B_2



www.attend.com.tw

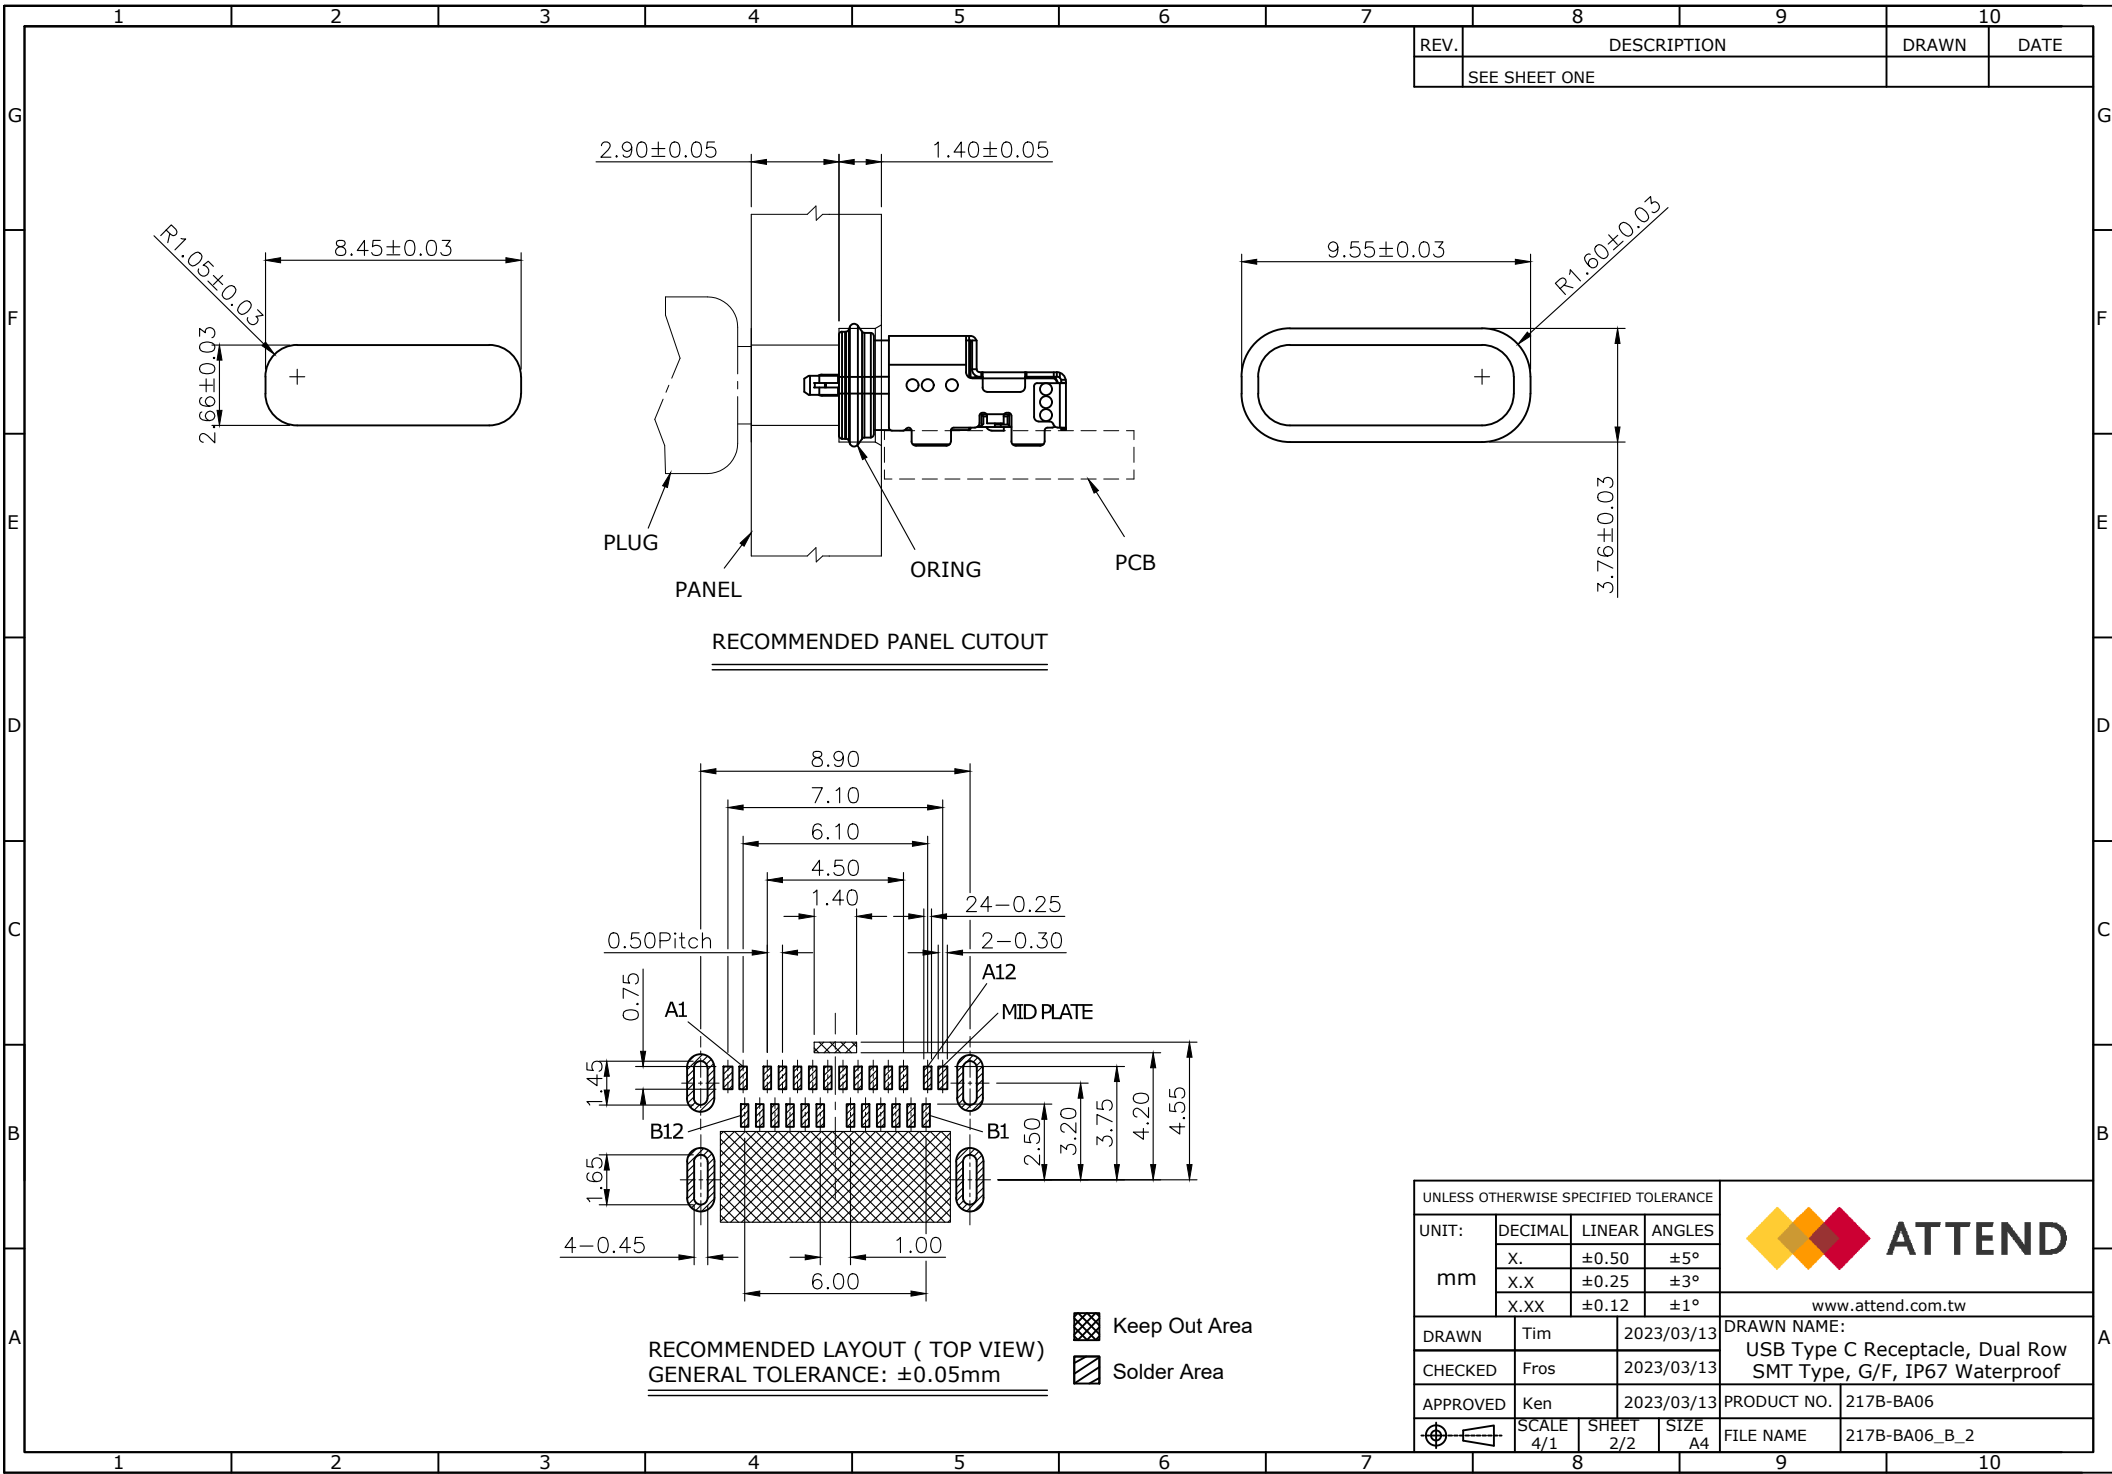

REV.	DESCRIPTION	DRAWN	DATE
	SEE SHEET ONE		

UNLESS OTHERWISE SPECIFIED TOLERANCE						 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES				
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
DRAWN	Tim		2023/03/13			DRAWN NAME: USB Type C Receptacle, Dual Row SMT Type, G/F, IP67 Waterproof	
CHECKED	Fros		2023/03/13			PRODUCT NO. 217B-BA06	
APPROVED	Ken		2023/03/13			FILE NAME 217B-BA06_B_2	
	SCALE 4/1	SHEET 2/2	SIZE A4				