



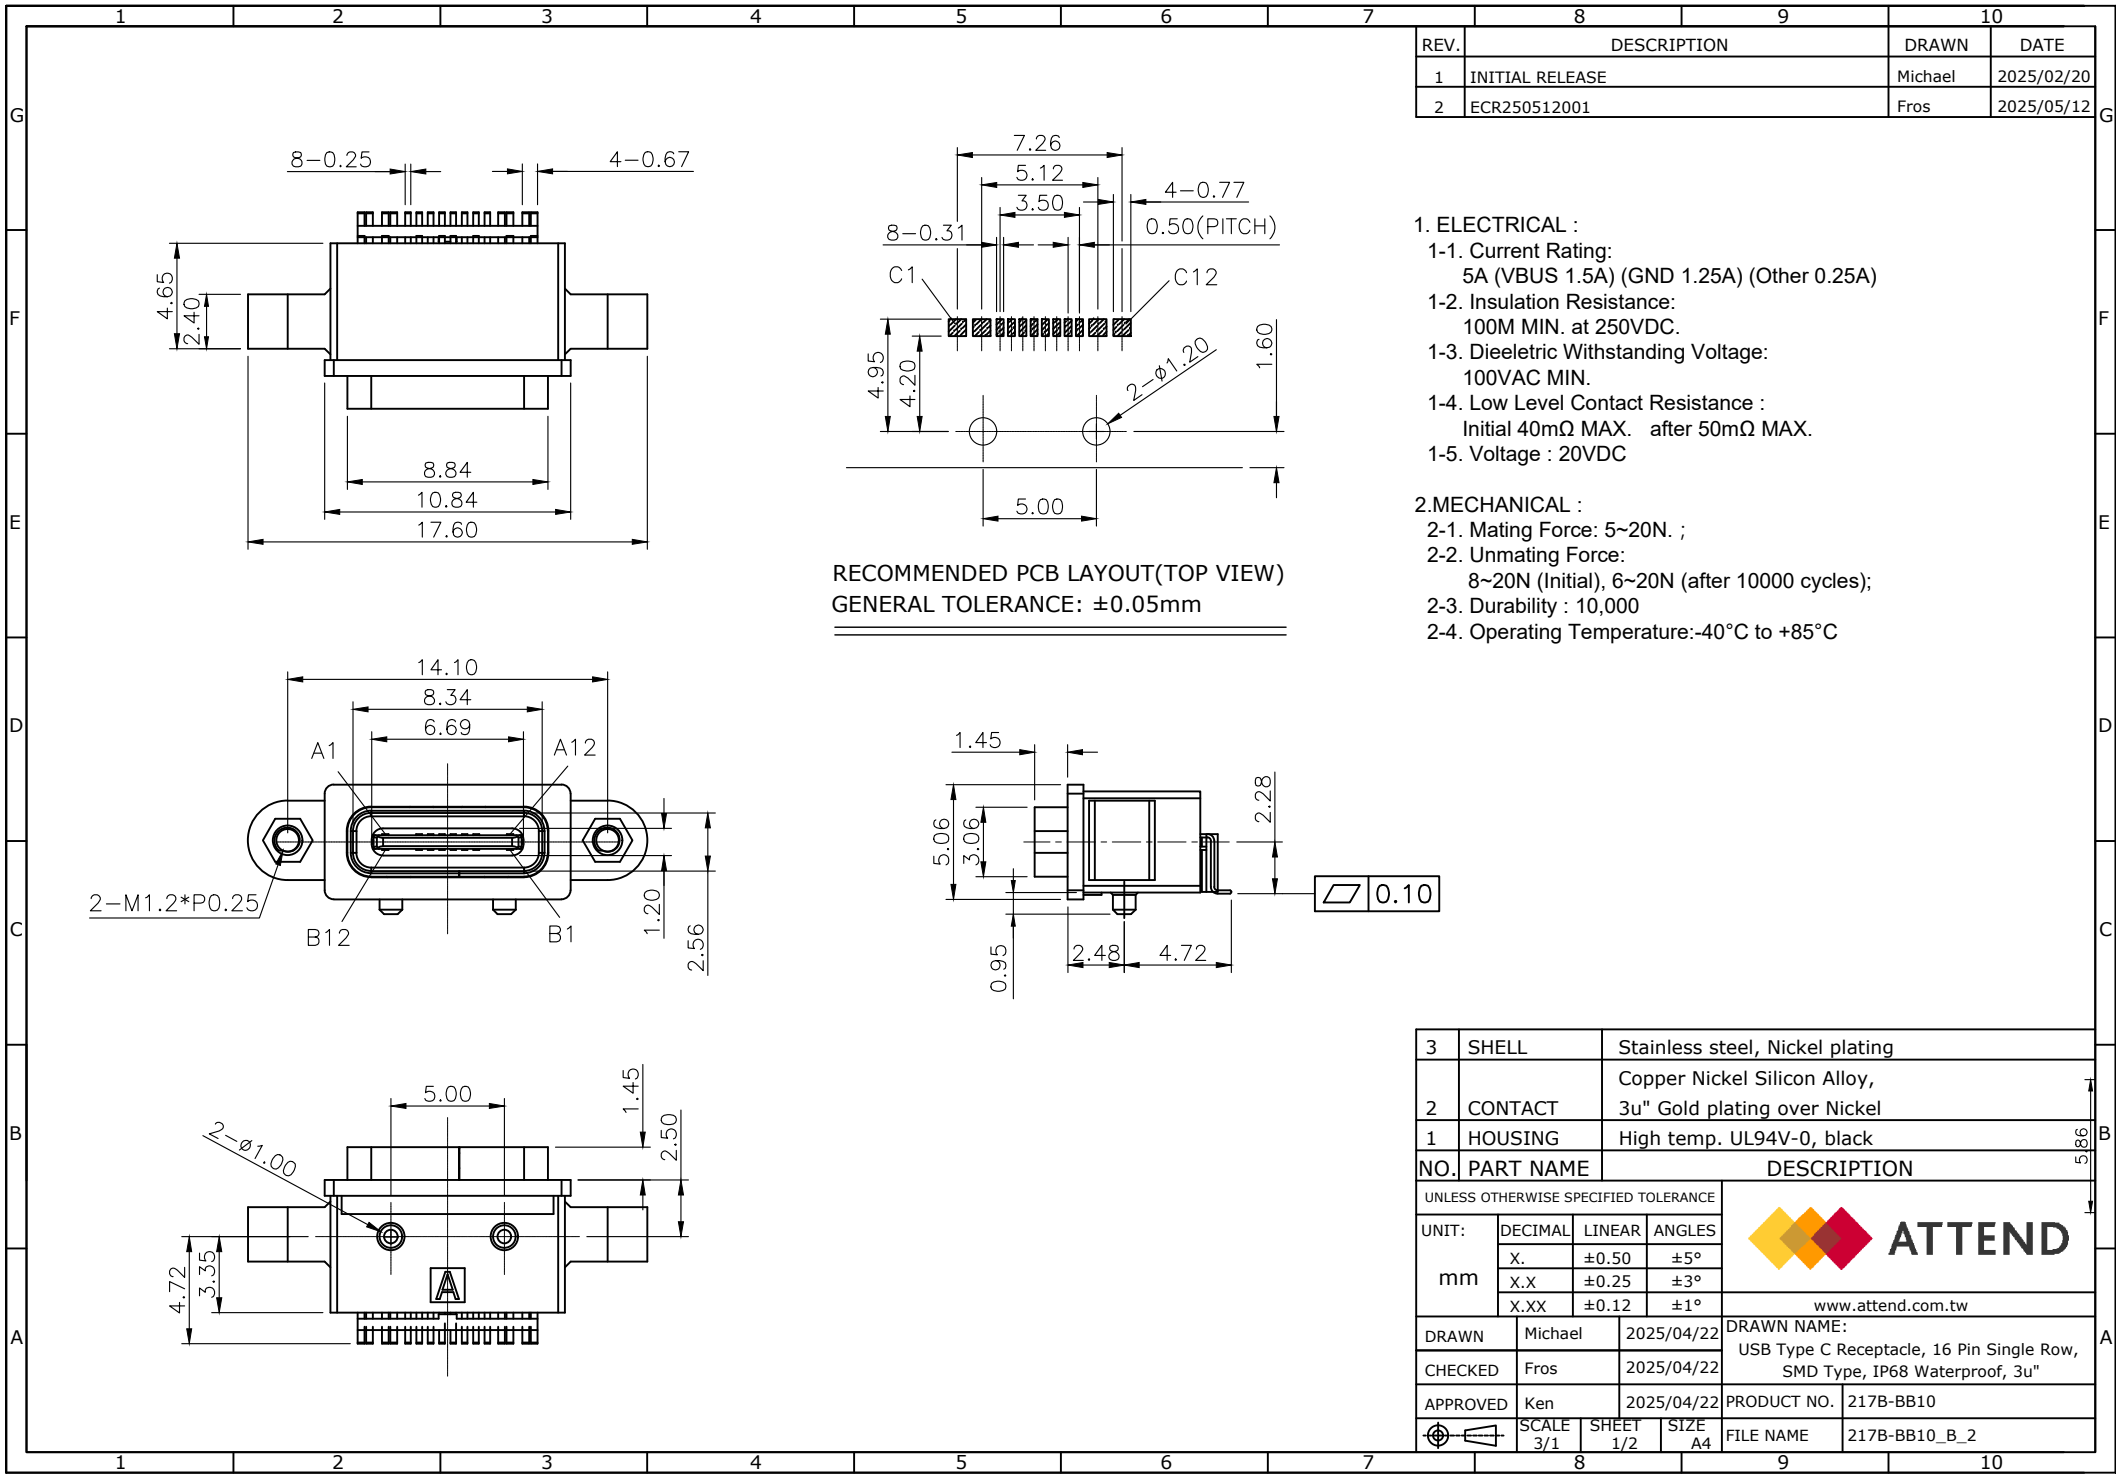


PIN ASSIGNMENT:

PIN NO.	A1 & B12	A4 & B9	B8	A5	B7	A6	A7	B6	A8	B5	A9 & B4	A12 & B1
SIGNAL NAME	GND	VBUS	SBU2	CC1	DN2	DP1	DN1	DP2	SBU1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

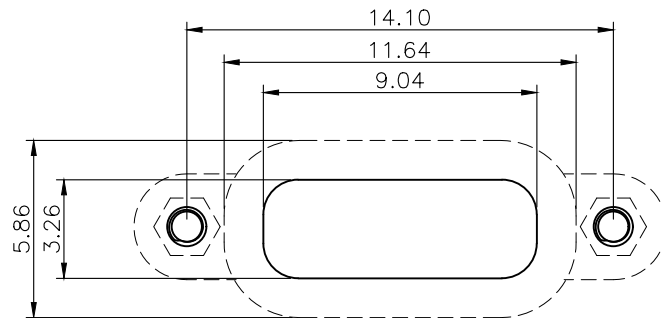


RECOMMENDED PANEL CUT

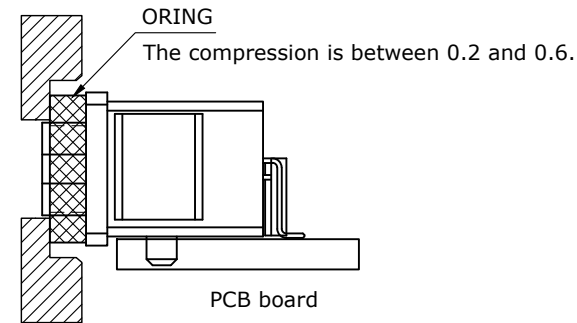


ORING:

PART NUMBER: 217-0010

The connector part number does not include ORING, so you must place an order separately when purchasing.

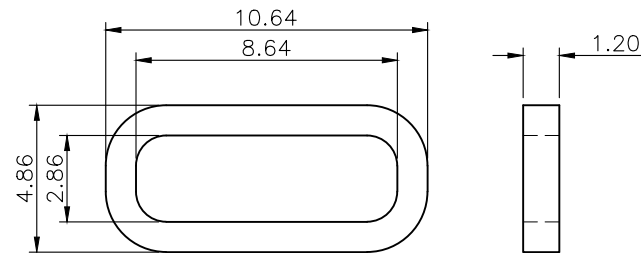

UNLESS OTHERWISE SPECIFIED TOLERANCE				ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Michael	2025/04/22	DRAWN NAME: USB Type C Receptacle, 16 Pin Single Row, SMD Type, IP68 Waterproof, 3u"		
CHECKED	Fros	2025/04/22			
APPROVED	Ken	2025/04/22	PRODUCT NO. 217B-BB10		
	SCALE 4/1	SHEET 2/2	SIZE A4	FILE NAME	217B-BB10_B_2

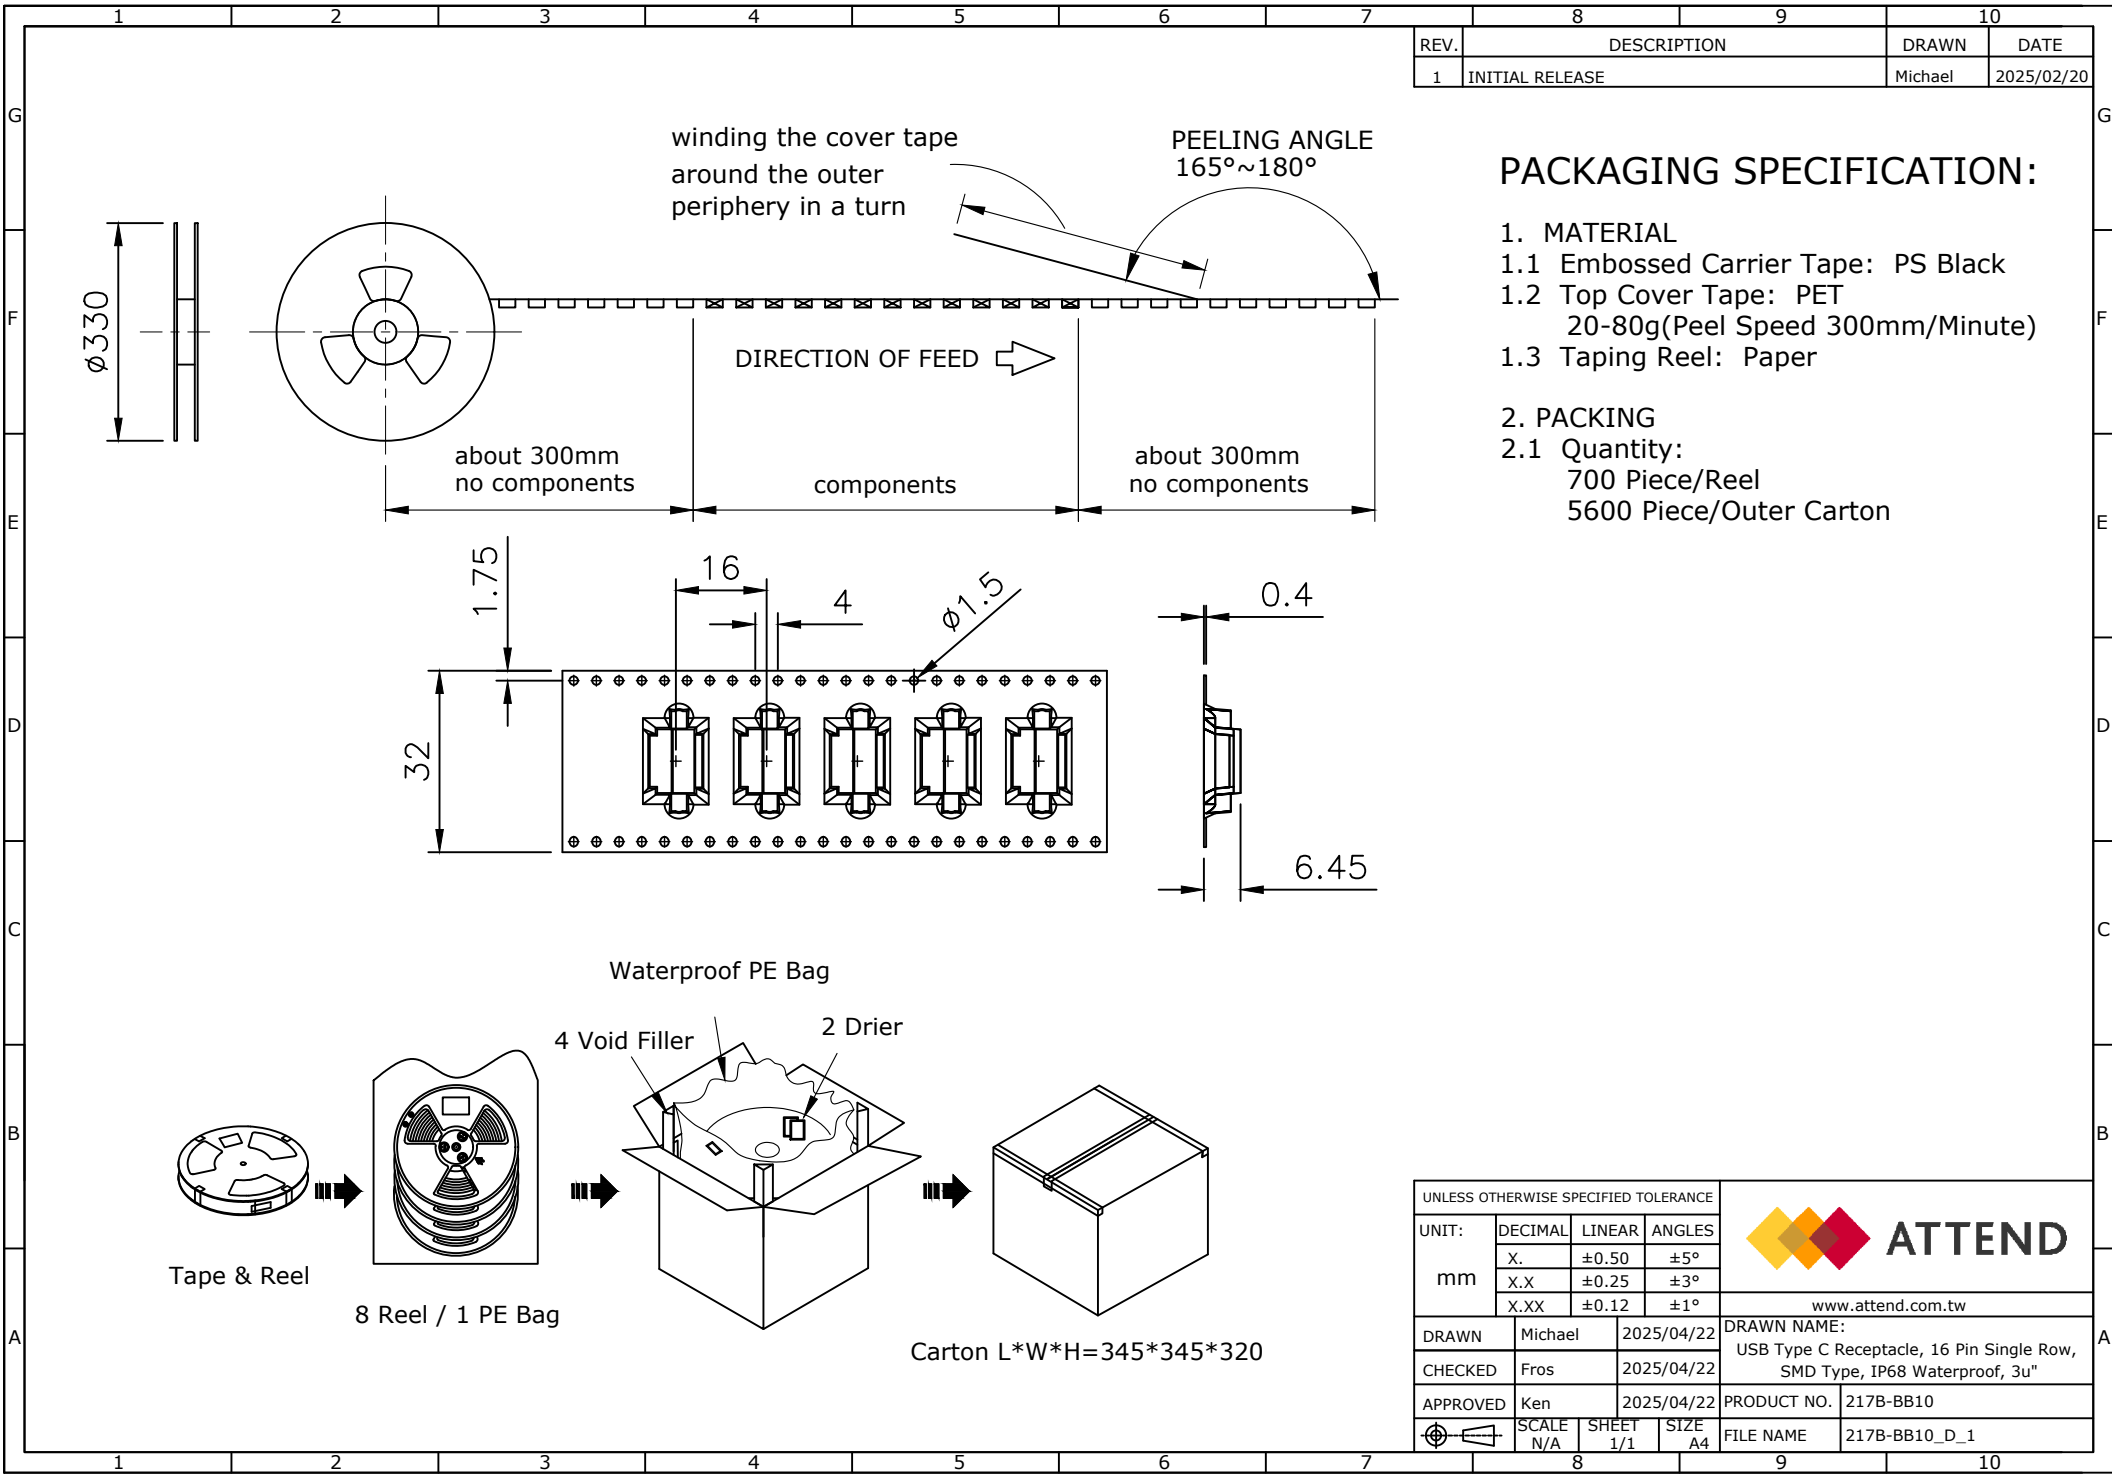

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/02/20

PACKAGING SPECIFICATION:

- 1. MATERIAL
 - 1.1 Embossed Carrier Tape: PS Black
 - 1.2 Top Cover Tape: PET 20-80g(Peel Speed 300mm/Minute)
 - 1.3 Taping Reel: Paper
- 2. PACKING
 - 2.1 Quantity:
 - 700 Piece/Reel
 - 5600 Piece/Outer Carton

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND www.attend.com.tw		
UNIT: mm	DECIMAL	LINEAR	ANGLES	DRAWN NAME: USB Type C Receptacle, 16 Pin Single Row, SMD Type, IP68 Waterproof, 3u"			
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
DRAWN	Michael	2025/04/22		PRODUCT NO. 217B-BB10			
CHECKED	Fros	2025/04/22					
APPROVED	Ken	2025/04/22					
	SCALE N/A	SHEET 1/1	SIZE A4	FILE NAME	217B-BB10_D_1		