




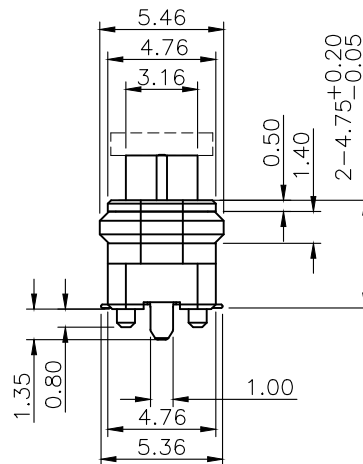


2.MECHANICAL :


- 2-1. Mating Force: 5~20N. ;
- 2-2. Unmating Force:
8~20N (Initial), 6~20N (after 10000 cycles);
- 2-3. Durability : 10,000
- 2-4. Operating Temperature:-40°C to +85°C

NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
mm				www.attend.com.tw	
DRAWN	Michael	2023/02/20	DRAWN NAME: USB Type C Straight Receptacle, 16 Pin Dual Row SMT 3u", IP68 Waterproof		
CHECKED	Fros	2023/02/20			
APPROVED	Ken	2023/02/20			
		SCALE 3/1	SHEET 1/3	SIZE A4	PRODUCT NO. 217D-AB12 FILE NAME 217D-AB12_B_3

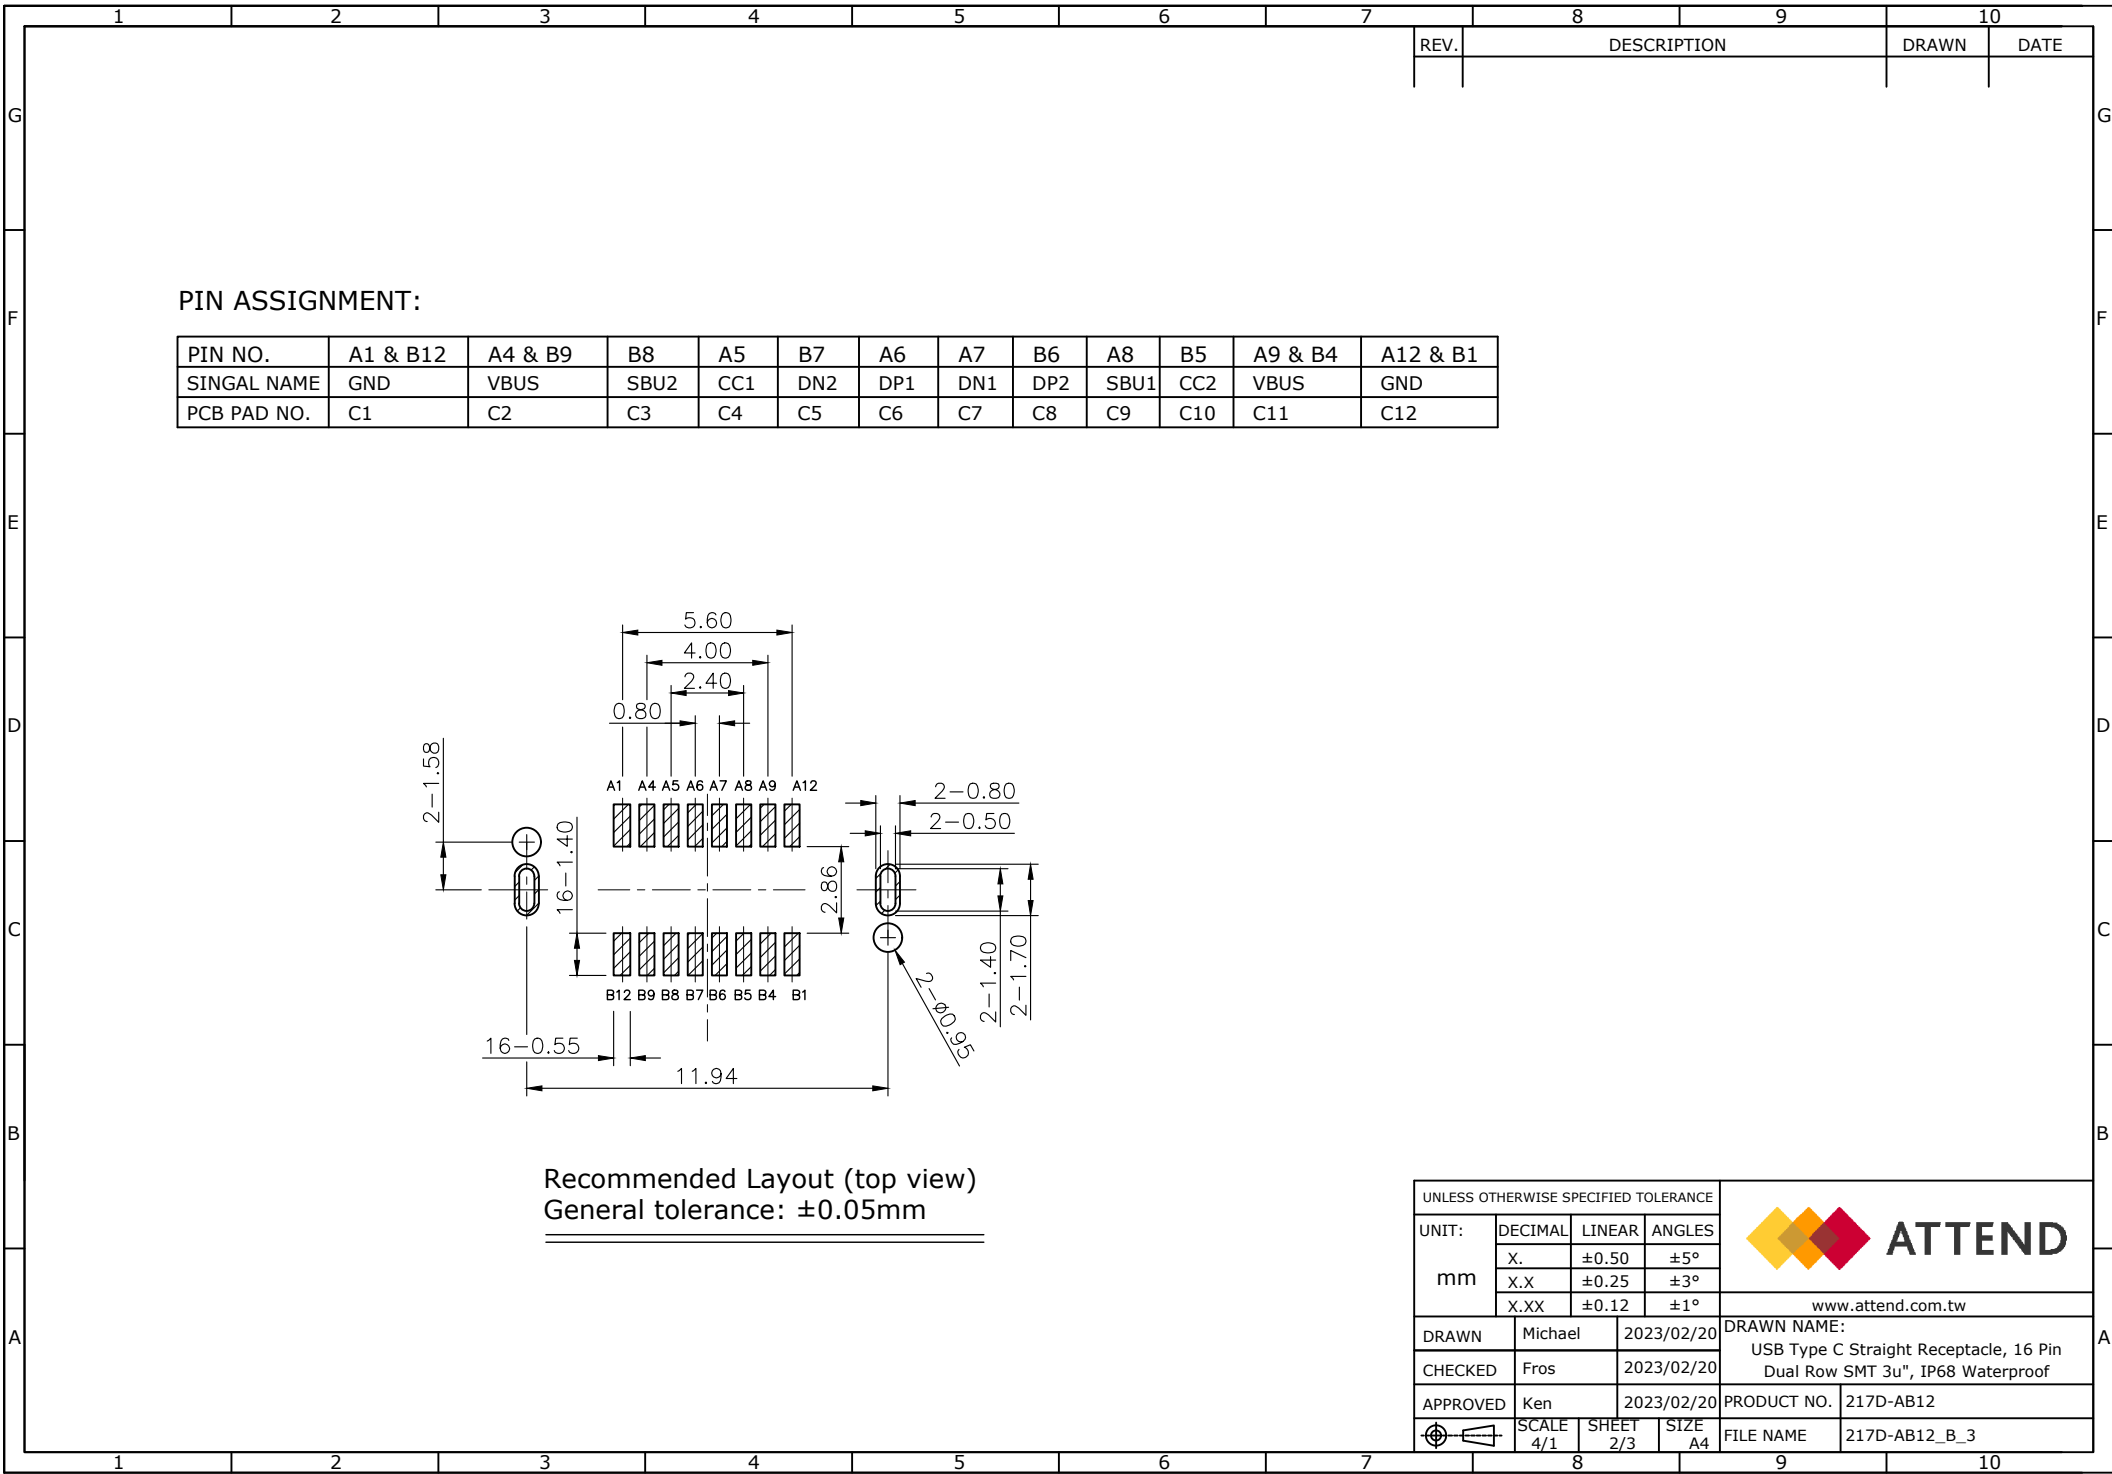

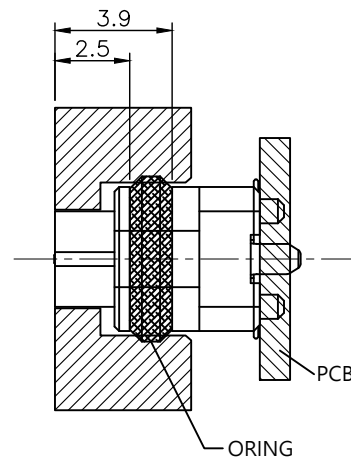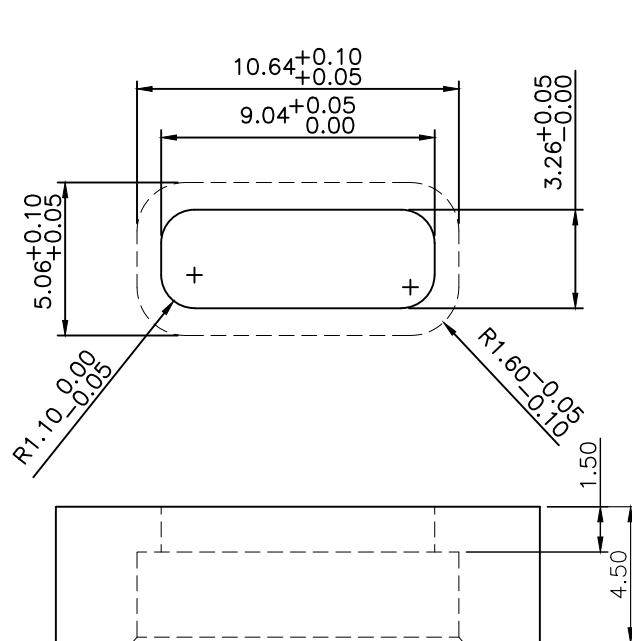

UNLESS OTHERWISE SPECIFIED TOLERANCE				ATTEND www.attend.com.tw			
UNIT: mm	DECIMAL	LINEAR	ANGLES				
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
DRAWN	Michael	2025/02/20	DRAWN NAME: USB Type C Straight Receptacle, 16 Pin Dual Row SMT 3u", IP68 Waterproof				
CHECKED	Fros	2025/02/20					
APPROVED	Ken	2025/02/20	PRODUCT NO.	217D-AB12			
	SCALE 4/1	SHEET 3/3	SIZE A4	FILE NAME	217D-AB12_B_3		

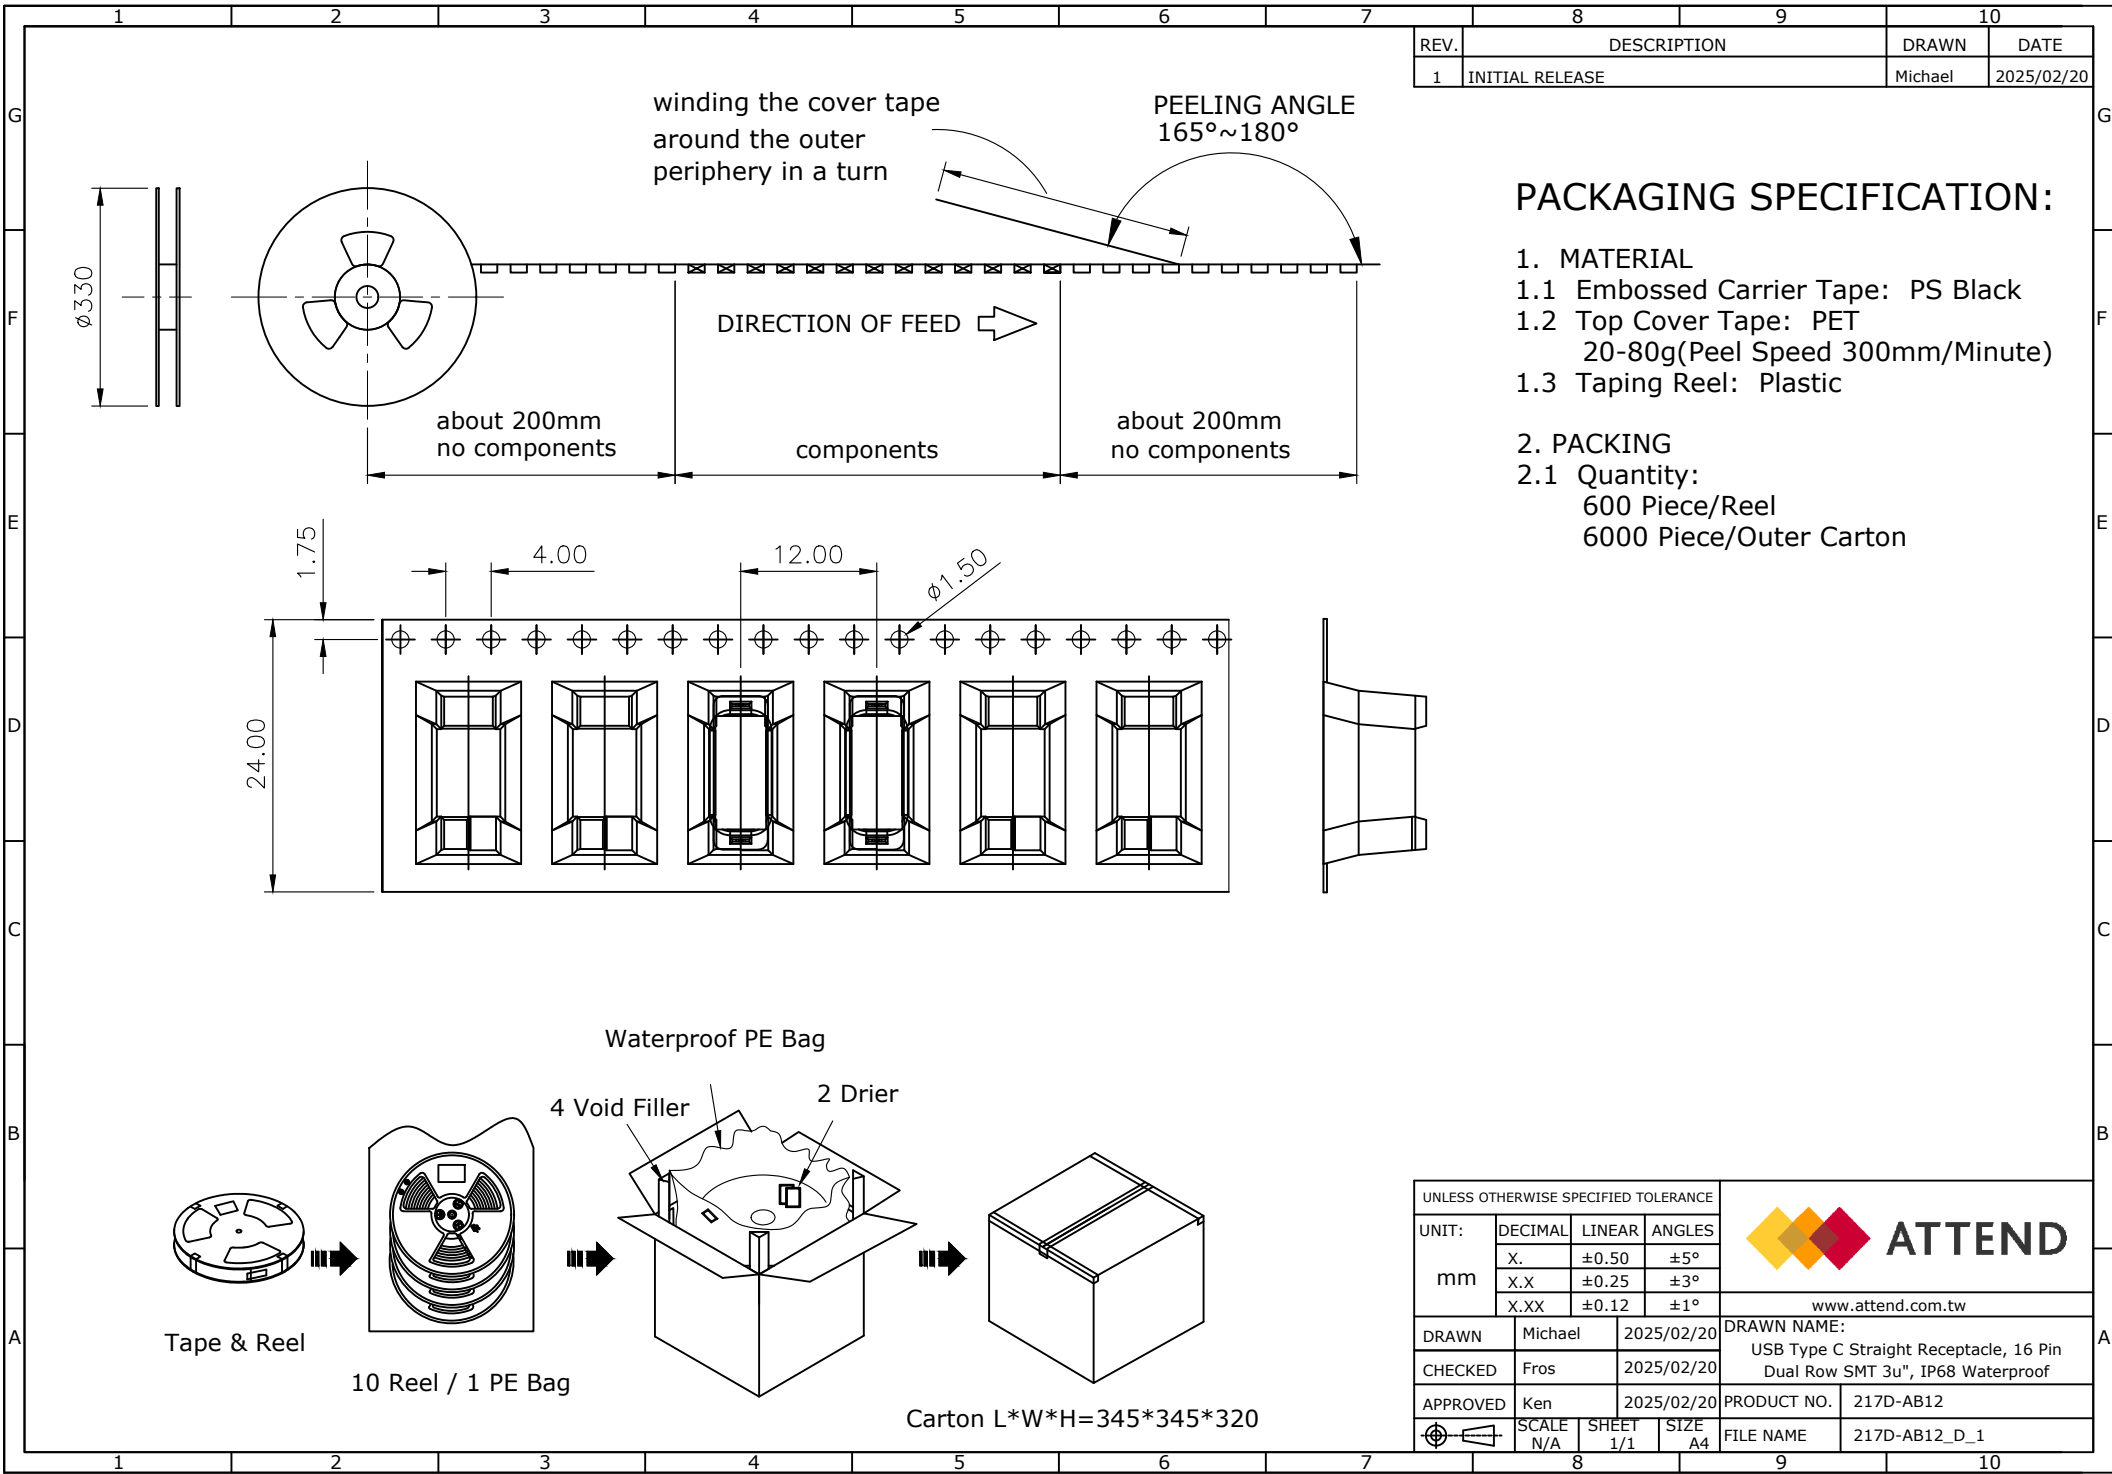

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/02/20

PACKAGING SPECIFICATION:

1. MATERIAL
- 1.1 Embossed Carrier Tape: PS Black
 - 1.2 Top Cover Tape: PET
20-80g(Peel Speed 300mm/Minute)
 - 1.3 Taping Reel: Plastic
2. PACKING
- 2.1 Quantity:
600 Piece/Reel
6000 Piece/Outer Carton

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw		
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Michael	2025/02/20		DRAWN NAME: USB Type C Straight Receptacle, 16 Pin Dual Row SMT 3u", IP68 Waterproof		
CHECKED	Fros	2025/02/20				
APPROVED	Ken	2025/02/20		PRODUCT NO.	217D-AB12	
	SCALE N/A	SHEET 1/1	SIZE A4	FILE NAME	217D-AB12_D_1	