
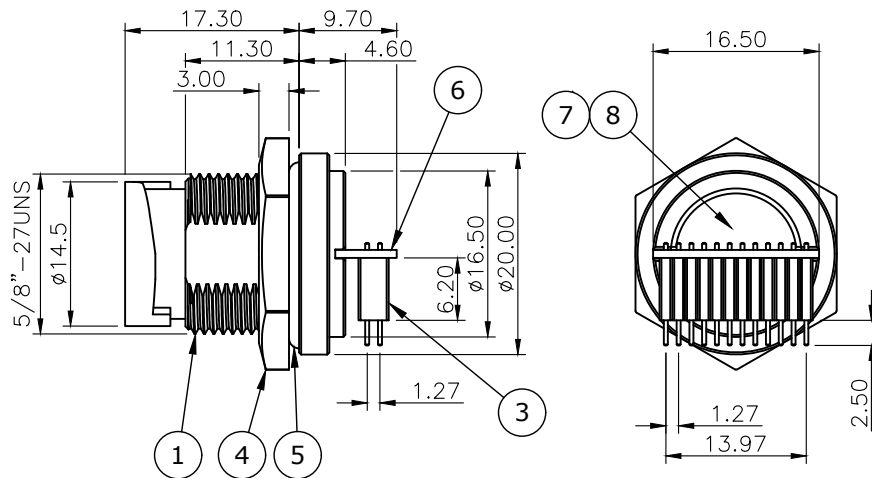
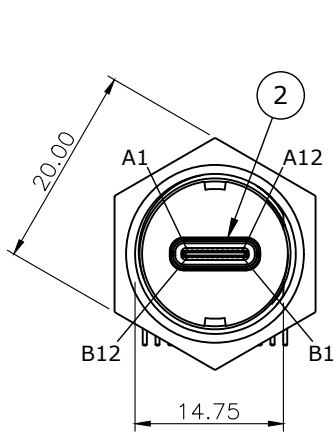
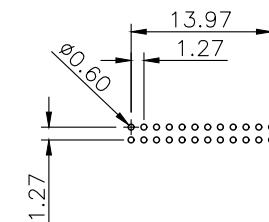


Recommended Panel Cut



Recommended Layout
General Tolerance: $\pm 0.05\text{mm}$

Pin Out:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX2-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

8	GLUE	EPORITE 5350A/B	
7	HOLD	EPDM	
6	PCB	FR-4	
5	ORING	Fluorocarbon Rubber	
4	NUT	Brass, Nickel Plating	
3	PIN HEADER	2x12 Pin, Pitch 1.27, Black	
2	USB CONN.	USB 3.2 Gen 2 Type C Receptacle	
1	HOUSING	Zn Alloy, Nickel Plating	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT: mm	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND
			www.attend.com.tw
DRAWN	Fros	2026/09/15	DRAWN NAME: USB 3.2 Gen 2 Type C Receptacle, Quick-Lock, 24 Pin , R/A DIP , IP68
CHECKED	Tim	2026/09/15	
APPROVED	Ken	2026/09/15	PRODUCT NO. 222A-04004
	SCALE 4/3	SHEET 1/1	SIZE A4
		FILE NAME	222A-04004_B_1