


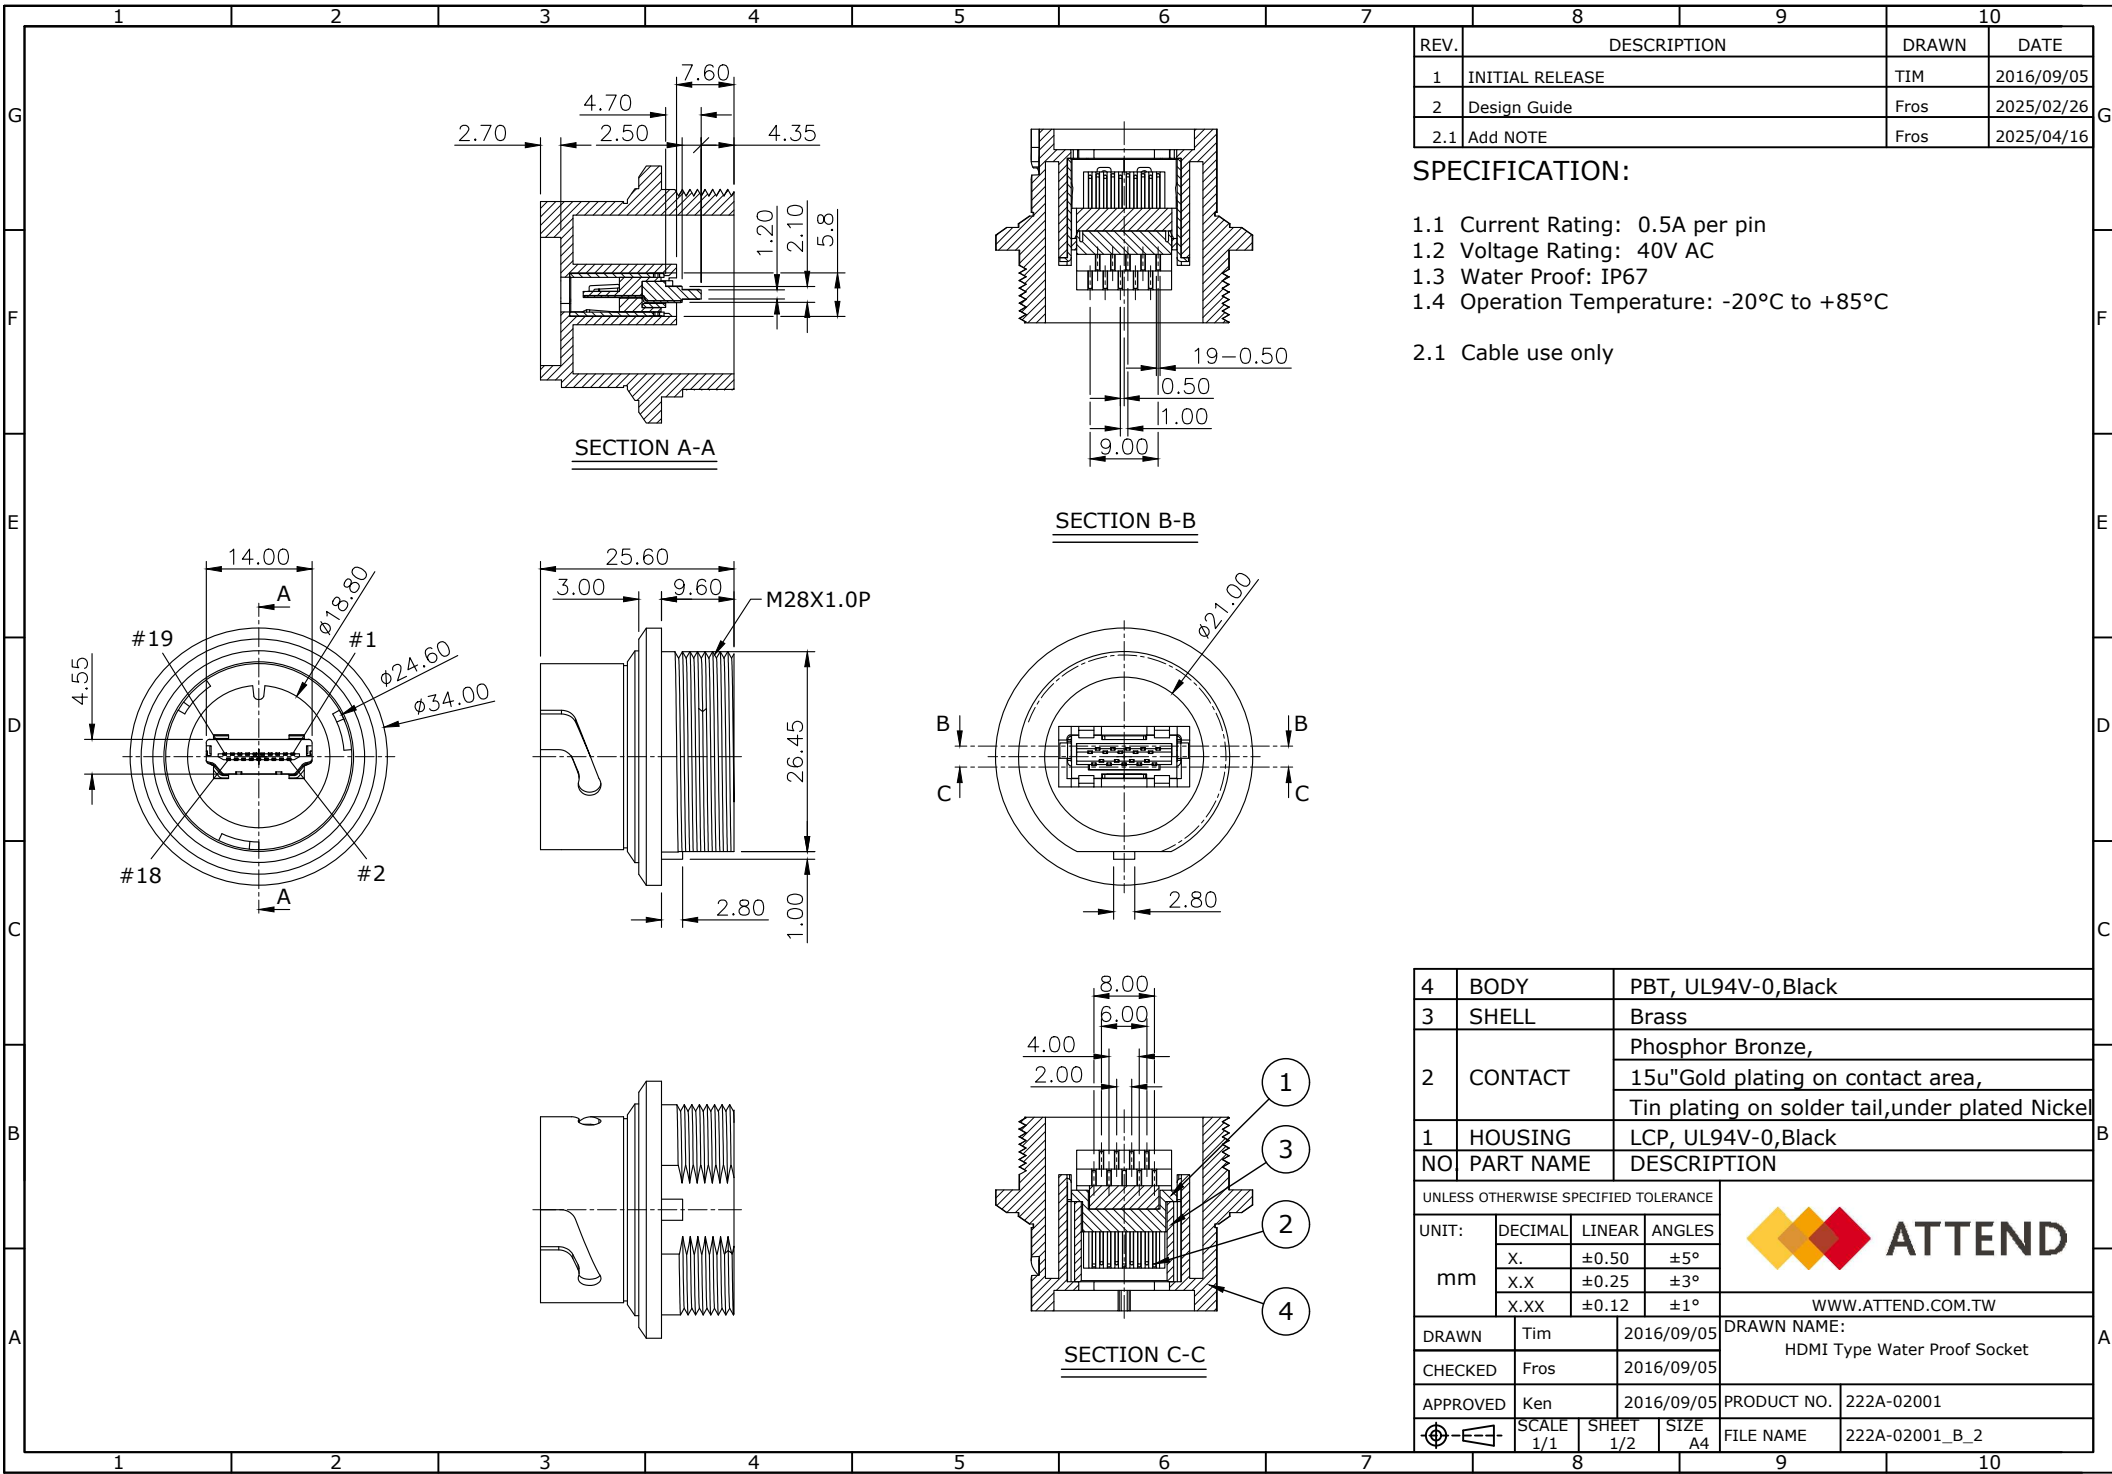


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/09/05
2	Design Guide	Fros	2025/02/26
2.1	Add NOTE	Fros	2025/04/16

SPECIFICATION:

- 1.1 Current Rating: 0.5A per pin
- 1.2 Voltage Rating: 40V AC
- 1.3 Water Proof: IP67
- 1.4 Operation Temperature: -20°C to +85°C
- 2.1 Cable use only

4	BODY	PBT, UL94V-0,Black
3	SHELL	Brass
2	CONTACT	Phosphor Bronze, 15u"Gold plating on contact area, Tin plating on solder tail,under plated Nickel
1	HOUSING	LCP, UL94V-0,Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE				 WWW.ATTEND.COM.TW	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
mm	X.XX	±0.12	±1°		
	DRAWN	Tim	2016/09/05	DRAWN NAME: HDMI Type Water Proof Socket	
	CHECKED	Fros	2016/09/05		
	APPROVED	Ken	2016/09/05	PRODUCT NO.	222A-02001
	SCALE	1/1	SHEET	1/2	FILE NAME
			SIZE	A4	222A-02001_B_2

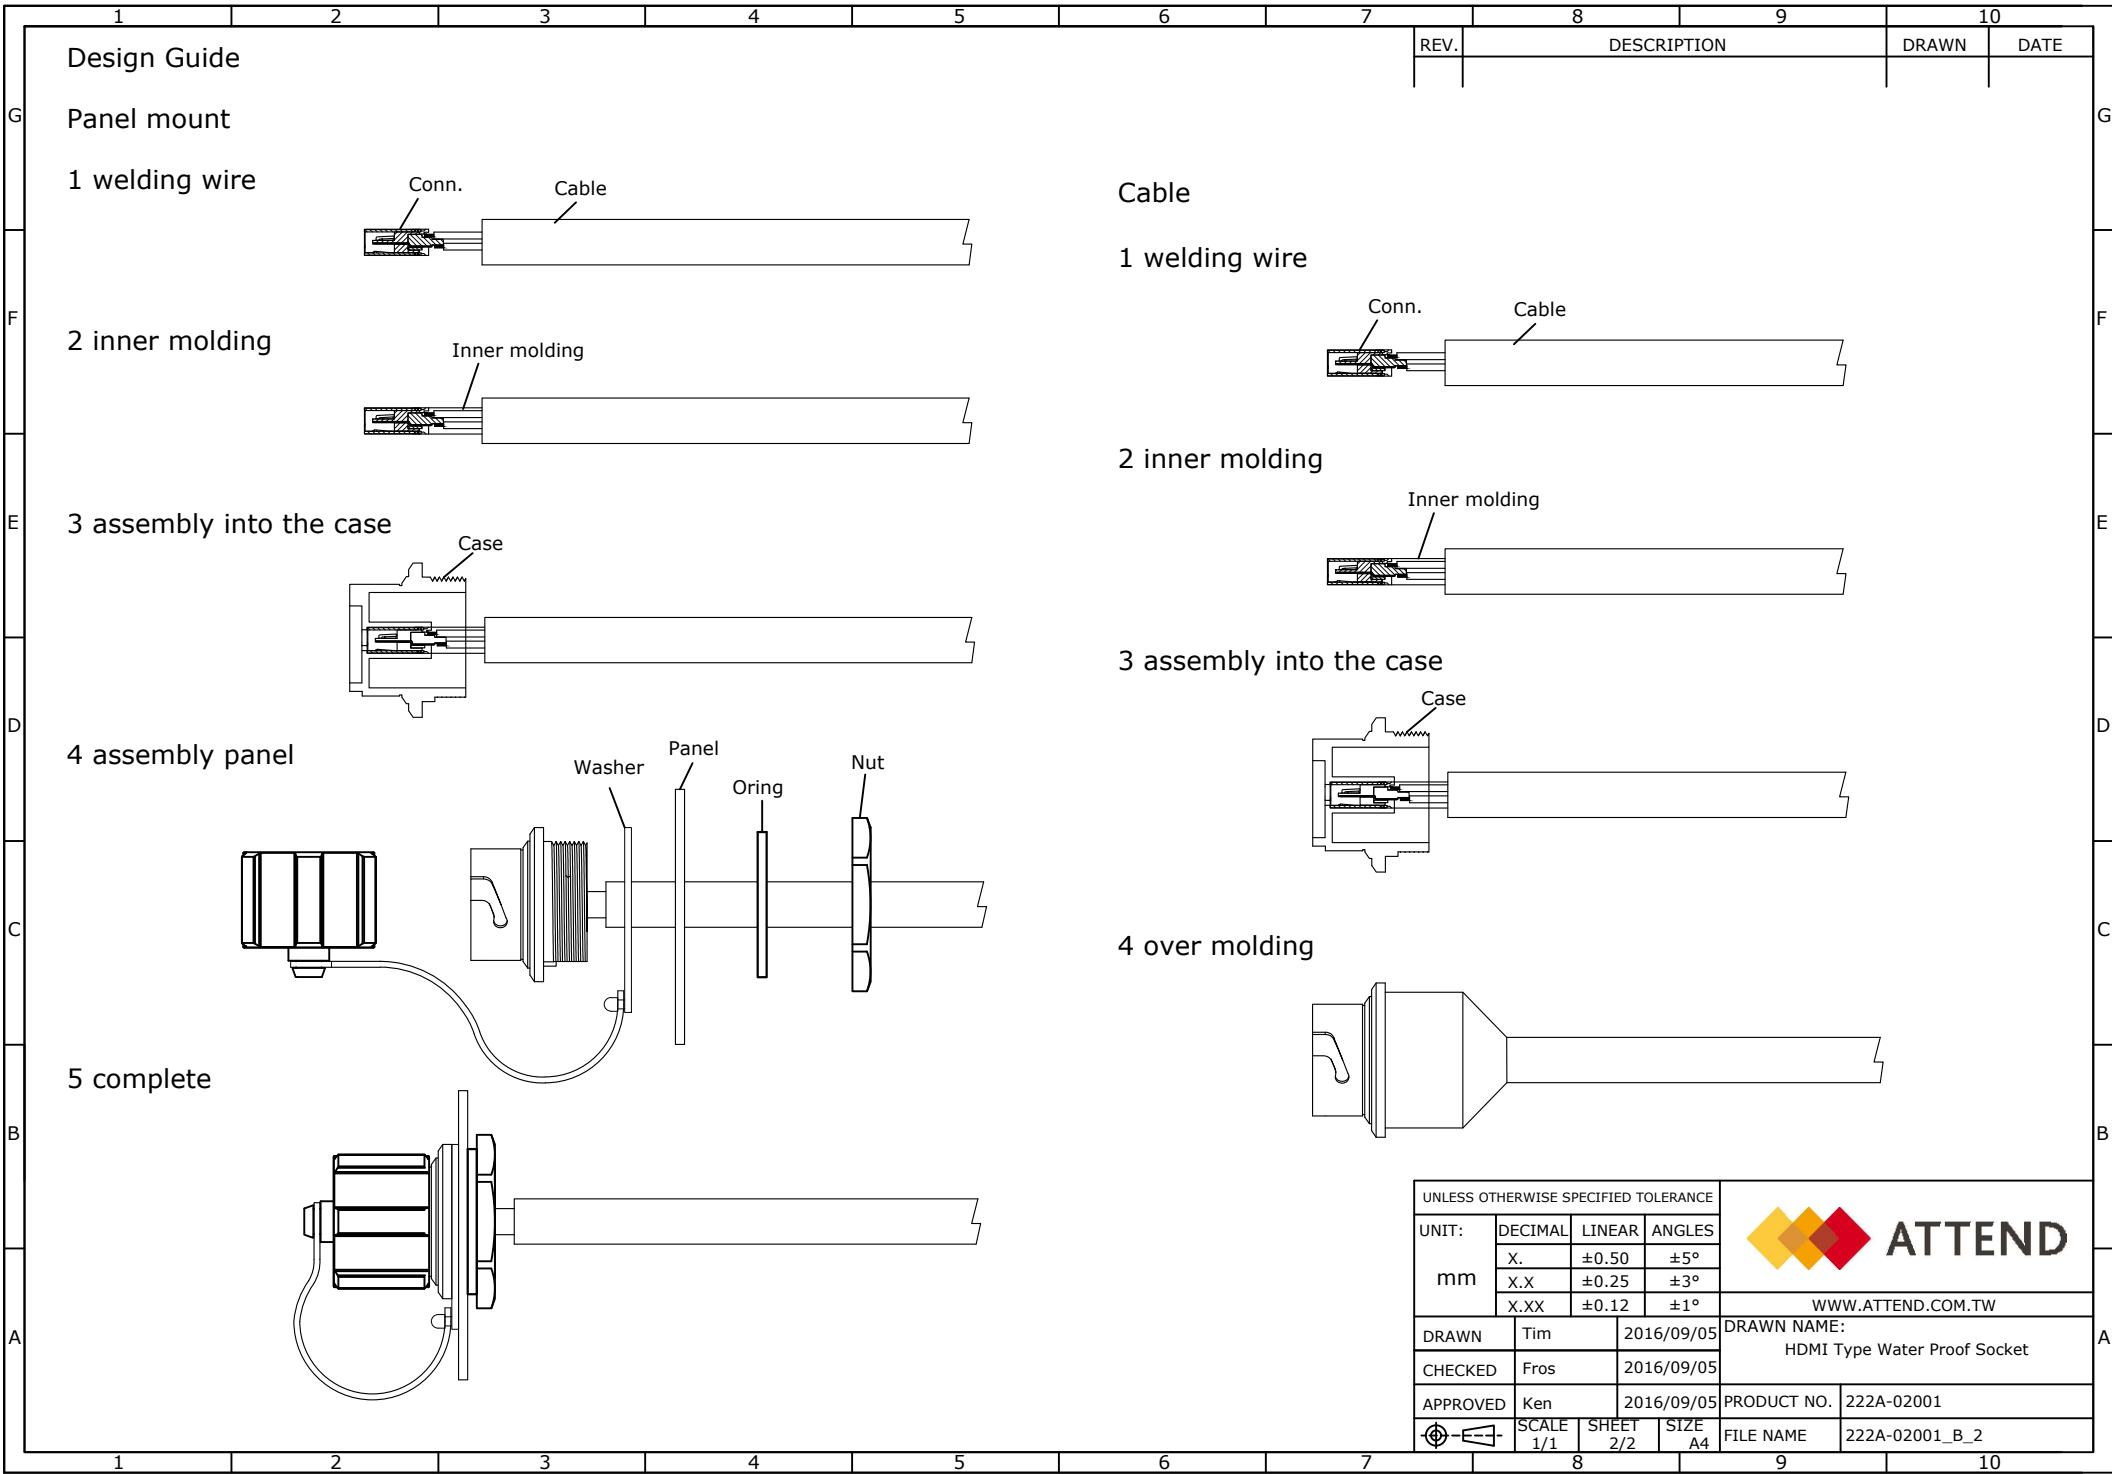

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND		
UNIT: mm	DECIMAL	LINEAR	ANGLES				
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
					WWW.ATTEND.COM.TW		
DRAWN		Tim		2016/09/05		DRAWN NAME: HDMI Type Water Proof Socket	
CHECKED		Fros		2016/09/05			
APPROVED		Ken		2016/09/05		PRODUCT NO.	222A-02001
		SCALE 1/1	SHEET 2/2	SIZE A4	FILE NAME	222A-02001_B_2	