
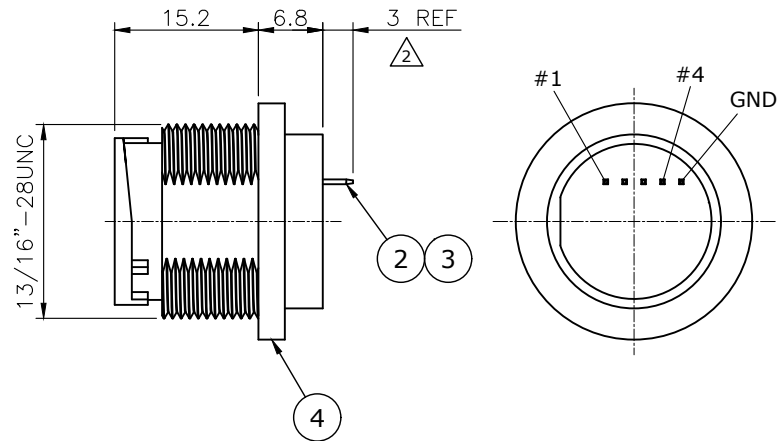
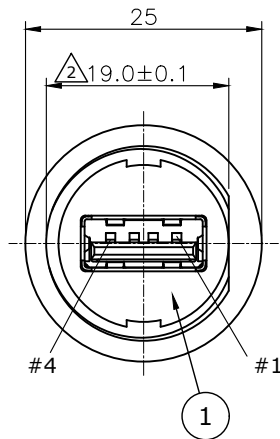


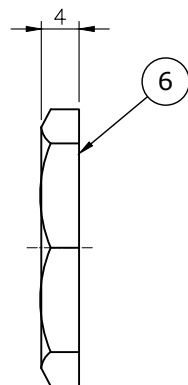


Recommended panel cut

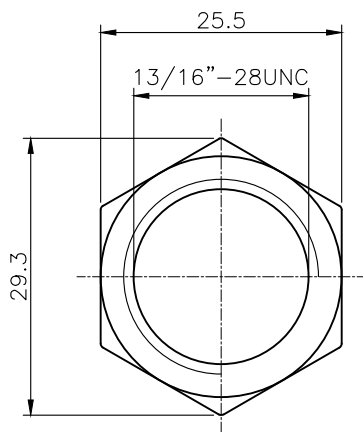

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2019/11/01
2	ECR2400002	FROS	2024/05/06
3	Design guide	FROS	2025/02/26

SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage Rating: 250VAC
3. Waterproof: IP67
4. Operating temperature range: -40°C~+85°C

6	NUT	PA66 UL94V-0, black
5	GASKET	Silicon, gray
4	SHELL	PA66 UL94V-0, black
3	GROUND	Stainless steel, Nickel plating over all
2	CONTACT	Phosphor Bronze, Gold flash over Nickel
1	HOUSING	PBT, UL94V-0, black


NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN		Fros	2019/11/01
CHECKED		Tim	2019/11/01
APPROVED		Ken	2019/11/01
SCALE		1.25	SHEET 1/2
SIZE		A4	FILE NAME
DRAWN NAME:		USB 2.0 A Type Waterproof Socket, Front Fastened Plastic, Quick-Lock, G/F	
PRODUCT NO.		222A-01003	
FILE NAME		222A-01003_B_3	




www.attend.com.tw

DESIGN GUIDE


Panel assembly
1 welding wire

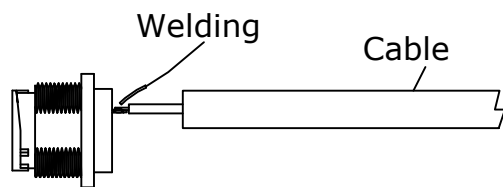


2 assembly inner molding

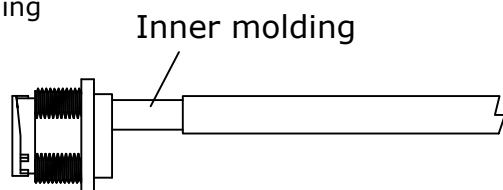


3 assembly

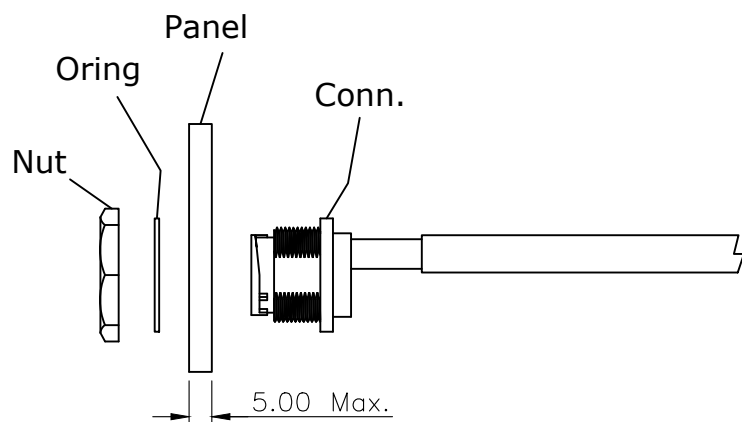


4 completion

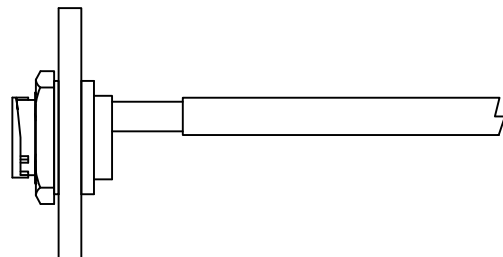


Cable assembly
1 welding wire

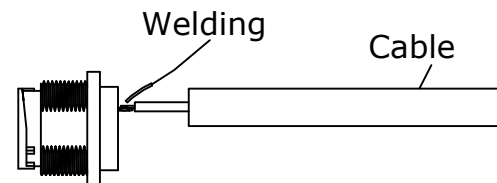

2 assembly inner molding

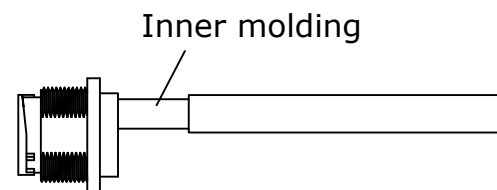

3 completion

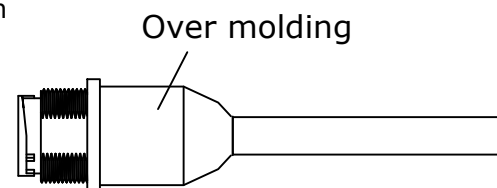

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2019/11/01	DRAWN NAME: USB 2.0 A Type Waterproof Socket, Front Fastened Plastic, Quick-Lock, G/F		
CHECKED	Tim	2019/11/01	PRODUCT NO. 222A-01003		
APPROVED	Ken	2019/11/01	FILE NAME 222A-01003_B_3		
	SCALE 1.25	SHEET 2/2	SIZE A4		