

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/05/27
2	Revised arrow and logo depth	FROS	2025/06/04
3	Update	TIM	2026/11/03


NOTES:

1. ELECTRICAL
   - Current Rating: Pin 1&2 2A, Pin 3&4 8A
   - Voltage Rating: 60VDC
   - Contact Resistance: 20mΩ max.
   - Shell Resistance: 100mΩ max.
   - Insulation Resistance: 500MΩ
   - Voltage Proof: 1000VDC (contact to contact), 2250VDC (contact to ground)
2. MECHANICAL
   - Durability: 100 Cycles
   - Insertion Force: 50N max.
   - Pull Out Force: 50N max.
   - Pull Out Force: 50N max.
3. ENVIRONMENTAL
   - Operating temperature range: -40°C~+85°C



CONN.1

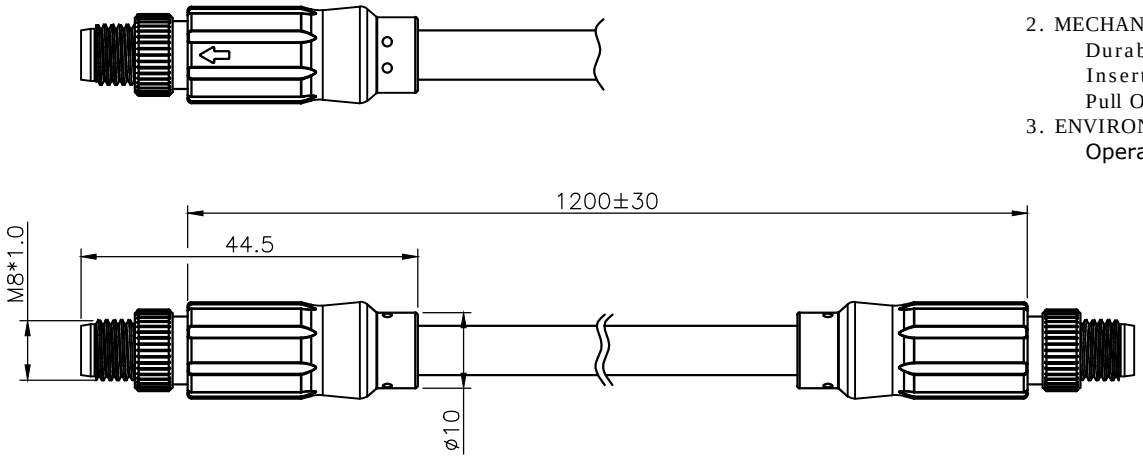



CONN.2

1	Blue	1	⚠3
2	White	2	
3	Red	3	
4	Black	4	
SHELL	Drain	SHELL	

CONN. 1 PIN ASSIGNMENTS CONN. 2

NO.	Q'ty	DESCRIPTION
⚠3 3	1PC	Cable, 26AWG*1P+AS+18AWG*2C, OD6.5, TPU green
2	2PC	Overmold, PVC black
1	2PC	M8 SPE 4 pin male molded with calbe

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT: mm

1~10 ±1
11~30 ±2
31~50 ±3
51~200 ±5
>401 ±10
ANGLE ±5°

ATTEND
www.attend.com.tw

DRAWN	Fros	2025/05/27
CHECKED	Allan	2025/05/27
APPROVED	Ken	2025/05/27

DRAWN NAME: M8 SPE Hybrid cable, Male to Male, L=120 cm

SCALE	SHEET	SIZE
1/1	1/1	A4

CUSTOMER NO.

PRODUCT NO. SPE-1P1P-12002