

REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	Fros	2025/05/07
2	Update	TIM	2026/11/03


NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance



Conn.1

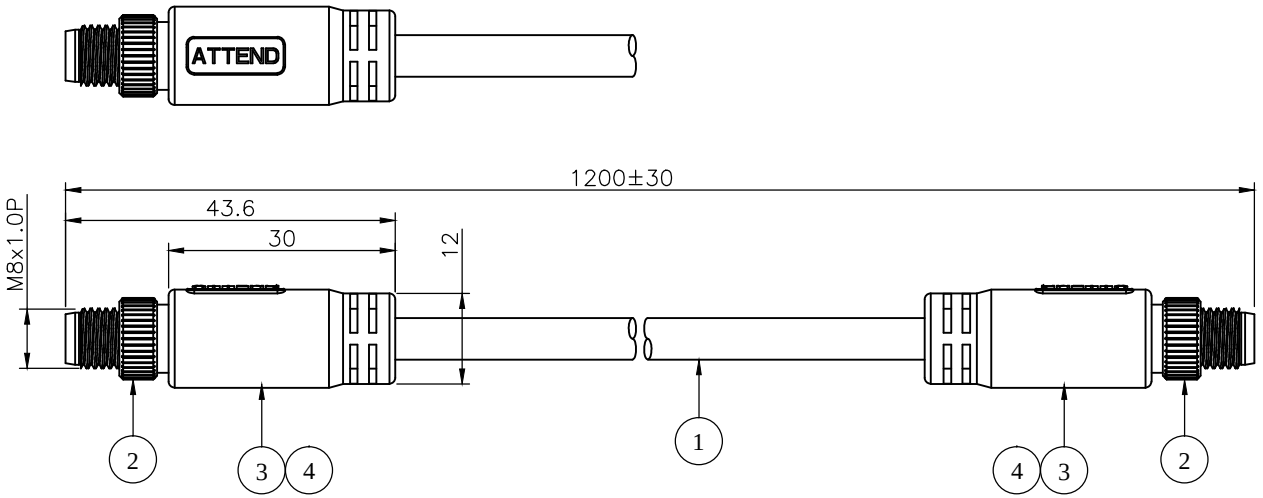



Conn.2

PIN ASSIGNMENT △2

Conn.1		Conn.2
1	Blue / White	1
2		2
3	Red	3
4	Black	4
SHELL	Drain	SHELL

NO.	Q'ty	DESCRIPTION
4	xg	Over Mold, TPU 50P, Black, T/N:HY-HX-0310
3	xg	Inner Mold, PE, T/N:HY-HX-0309
2	2PCS	CONN., SPE M8 4Pin Male, P/N: 229B-04MS01
△2 1	1PC	Cable, 26AWG*1P+AS+18AWG*2C, TPU Green

UNLESS OTHERWISE SPECIFIED TOLERANCE			ATTEND
UNIT: mm	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5	>401 ±10 ANGLE ±5°	www.attend.com.tw
DRAWN	Fros	2025/05/07	DRAWN NAME: M8 SPE Hybrid Male to Male CABLE L=1.2M
CHECKED	Allen	2025/05/07	
APPROVED	Ken	2025/05/07	CUSTOMER NO.
	SCALE 1/1 / SHEET 1/1 / SIZE A4		PRODUCT NO. SPE-1P1P-12001