

REV.	DESCRIPTION	DRAWN	DATE
3	add dimension	FROS	2021/07/12
4	ECR250418002	FROS	2025/04/18
5	Add waterproof cap part number description	FROS	2026/11/04


SPECIFICATION:


1. Current Rating: 0.5A
2. Voltage Rating: 50VAC/ 60VDC
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 85°C
5. This part can only be used with part number 216-0012; it cannot be used with other waterproof covers.

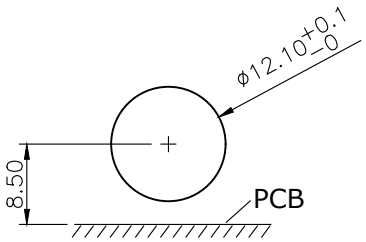



Recommend Panel Cut

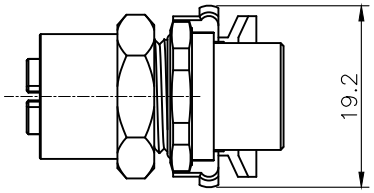


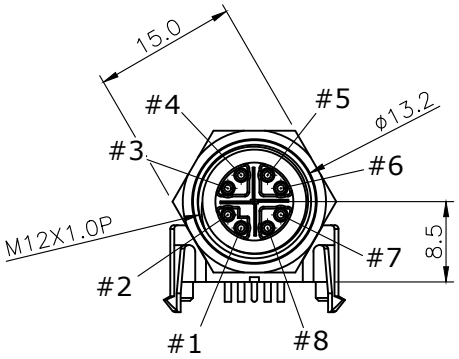


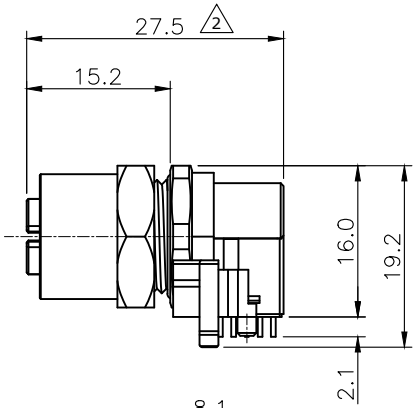




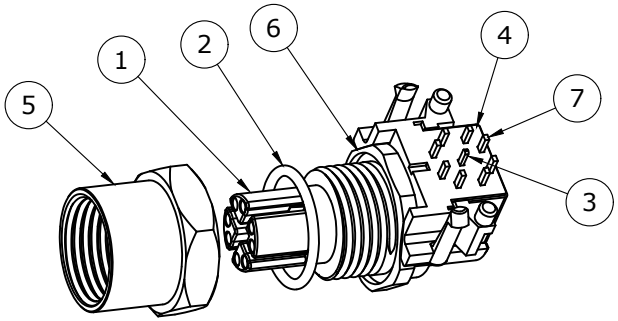

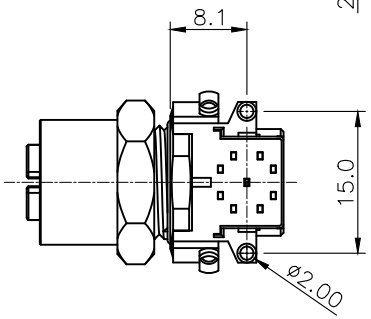

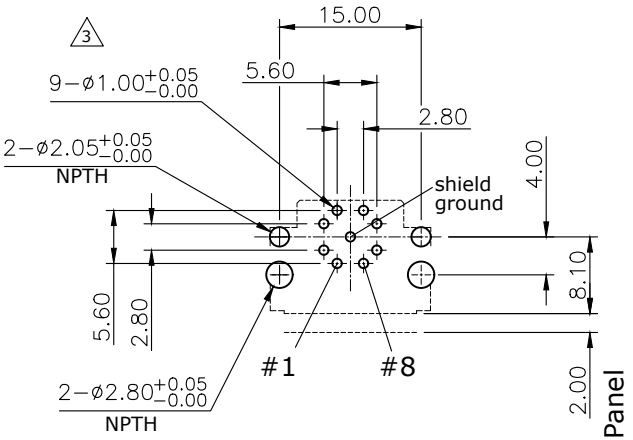

Recommend Layout (top view)
General Tolerance: ±0.05mm



NO.	PART NAME	DESCRIPTION
8	Glue	Epoxy
7	CONTACT	Phosphor Bronze, gold plating over nickel
6	NUT	Brass, Nickel plating
5	SCREW	Brass, Nickel plating
4	PIN HOLDER	PBT, UL94V-0, Black
3	SHIELD	Brass, Nickel plating
2	ORING	EPDM/NBR, Black
1	HOUSING	PBT, UL94V-0, Black

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°

ATTEND
www.attend.com.tw

DRAWN	Fros	2019/12/06	DRAWN NAME: M12 x-code Receptacle, 8 Pin Female, R/A DIP Front fastened, w/shield 10u"
CHECKED	Tim	2019/12/06	
APPROVED	Ken	2019/12/06	PRODUCT NO. 216X-08FRF
	SCALE 1.25	SHEET 1/1	SIZE A4 — FILE NAME 216X-08FRF_B_4