


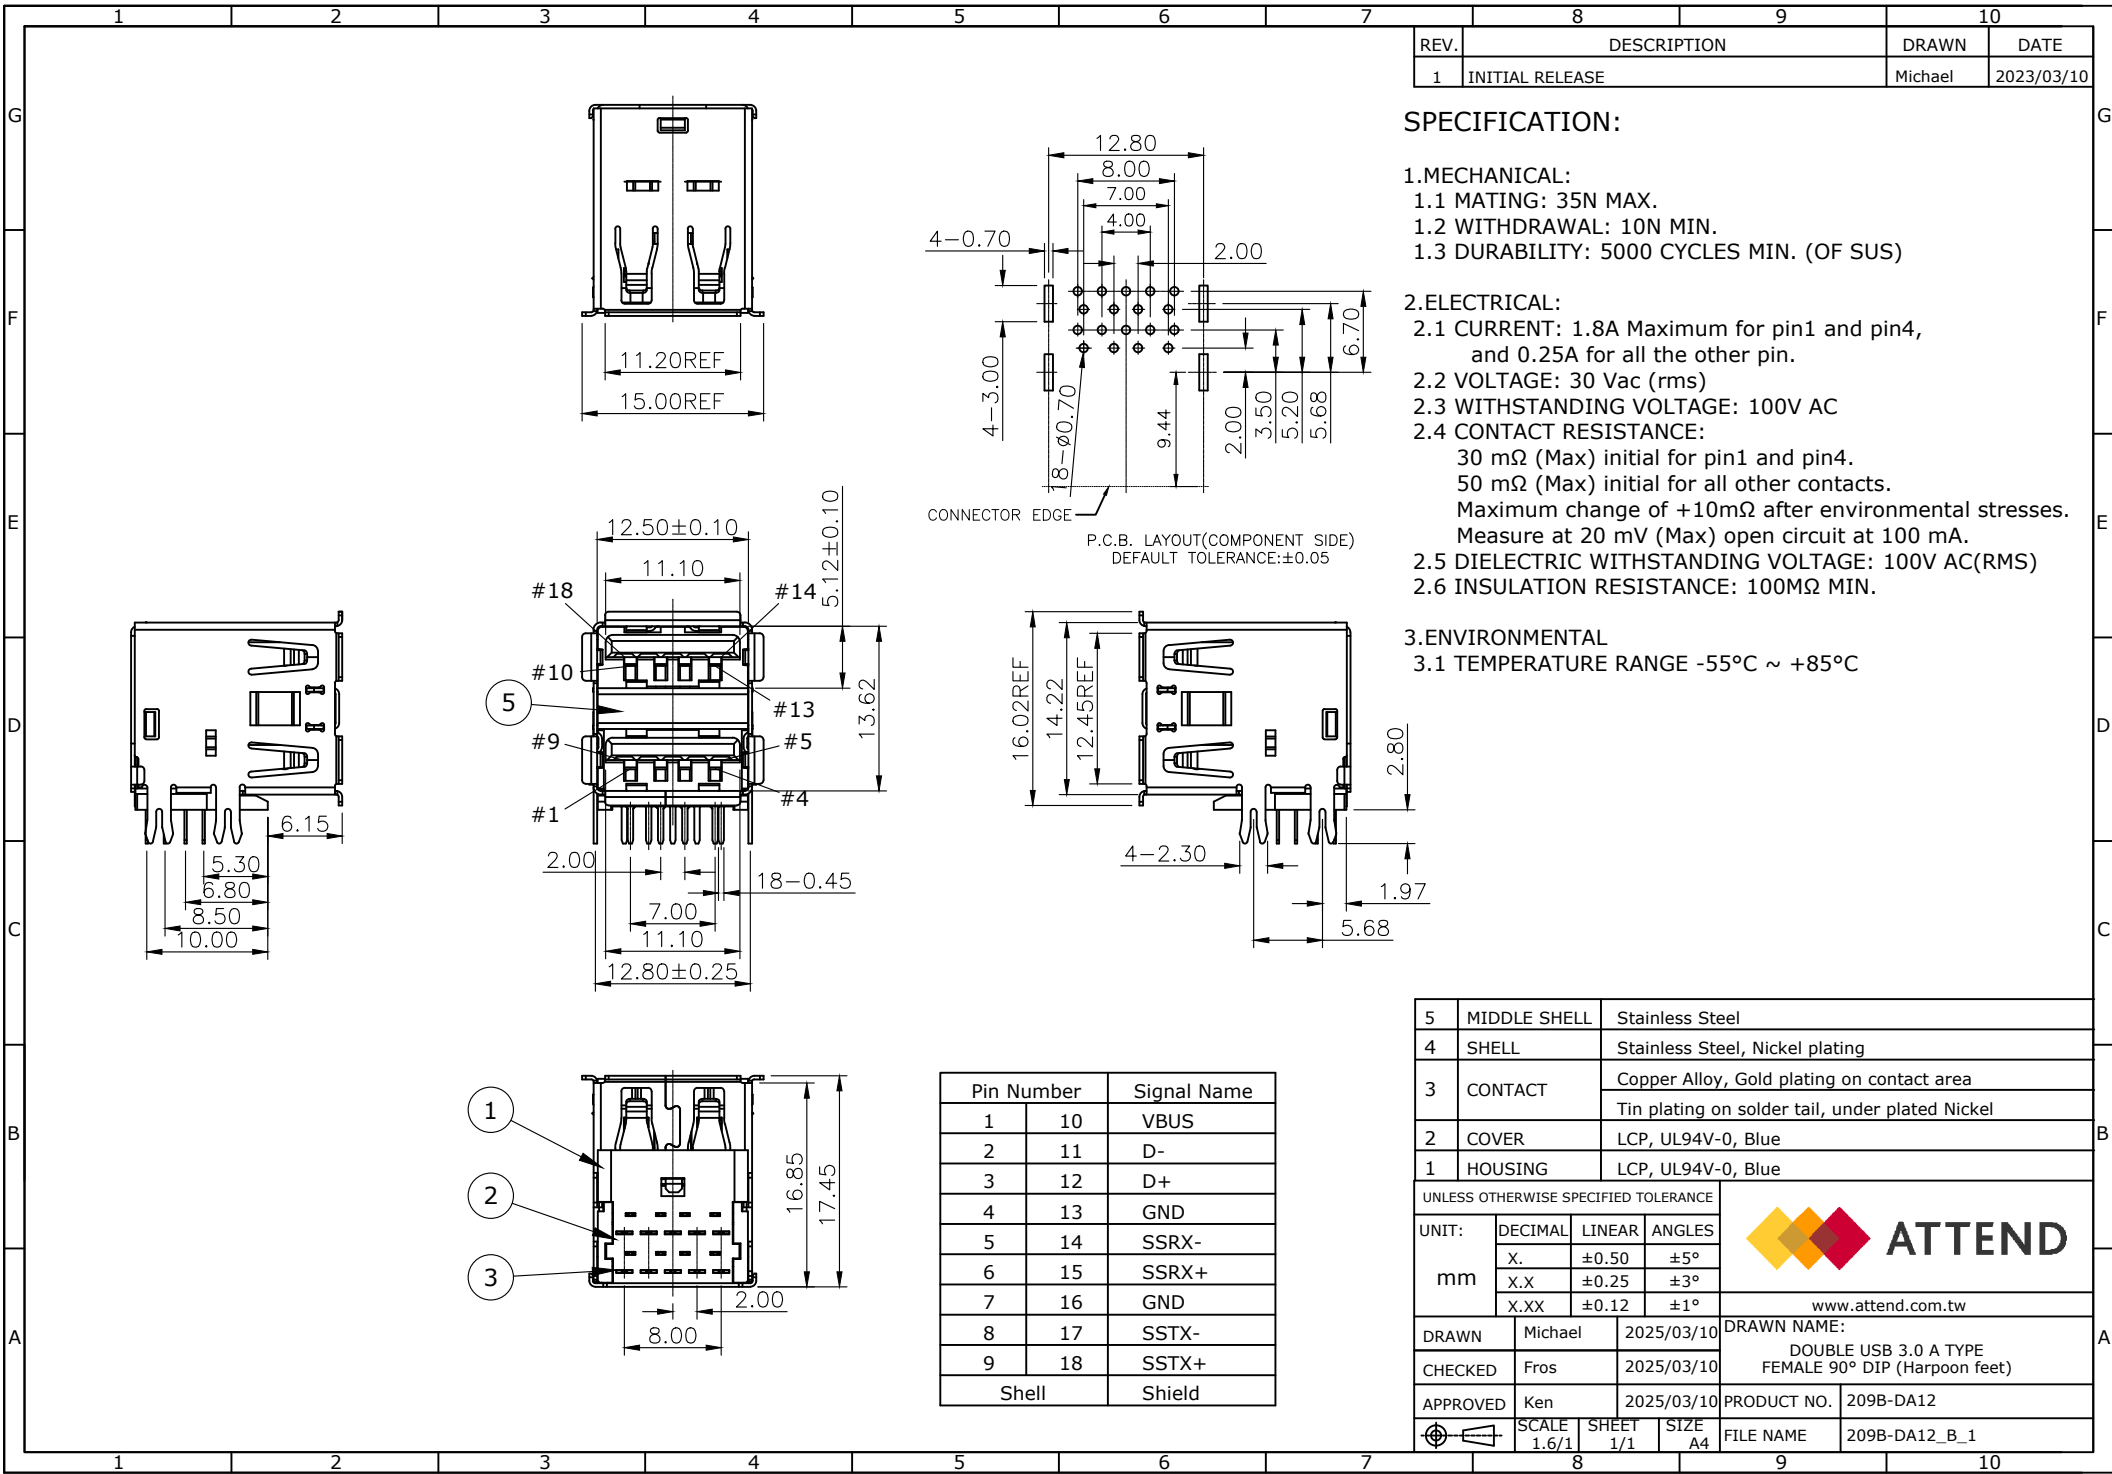

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2023/03/10

SPECIFICATION:

- MECHANICAL:
 - MATING: 35N MAX.
 - WITHDRAWAL: 10N MIN.
 - DURABILITY: 5000 CYCLES MIN. (OF SUS)
- ELECTRICAL:
 - CURRENT: 1.8A Maximum for pin1 and pin4, and 0.25A for all the other pin.
 - VOLTAGE: 30 Vac (rms)
 - WITHSTANDING VOLTAGE: 100V AC
 - CONTACT RESISTANCE:
 - 30 mΩ (Max) initial for pin1 and pin4.
 - 50 mΩ (Max) initial for all other contacts.Maximum change of +10mΩ after environmental stresses. Measure at 20 mV (Max) open circuit at 100 mA.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC(RMS)
 - INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE RANGE -55°C ~ +85°C

5	MIDDLE SHELL	Stainless Steel
4	SHELL	Stainless Steel, Nickel plating
3	CONTACT	Copper Alloy, Gold plating on contact area Tin plating on solder tail, under plated Nickel
2	COVER	LCP, UL94V-0, Blue
1	HOUSING	LCP, UL94V-0, Blue


UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



www.attend.com.tw

DRAWN	Michael	2025/03/10	DRAWN NAME:	
CHECKED	Fros	2025/03/10	DOUBLE USB 3.0 A TYPE FEMALE 90° DIP (Harpoon feet)	
APPROVED	Ken	2025/03/10	PRODUCT NO.	209B-DA12
	SCALE 1.6/1	SHEET 1/1	SIZE A4	FILE NAME 209B-DA12_B_1

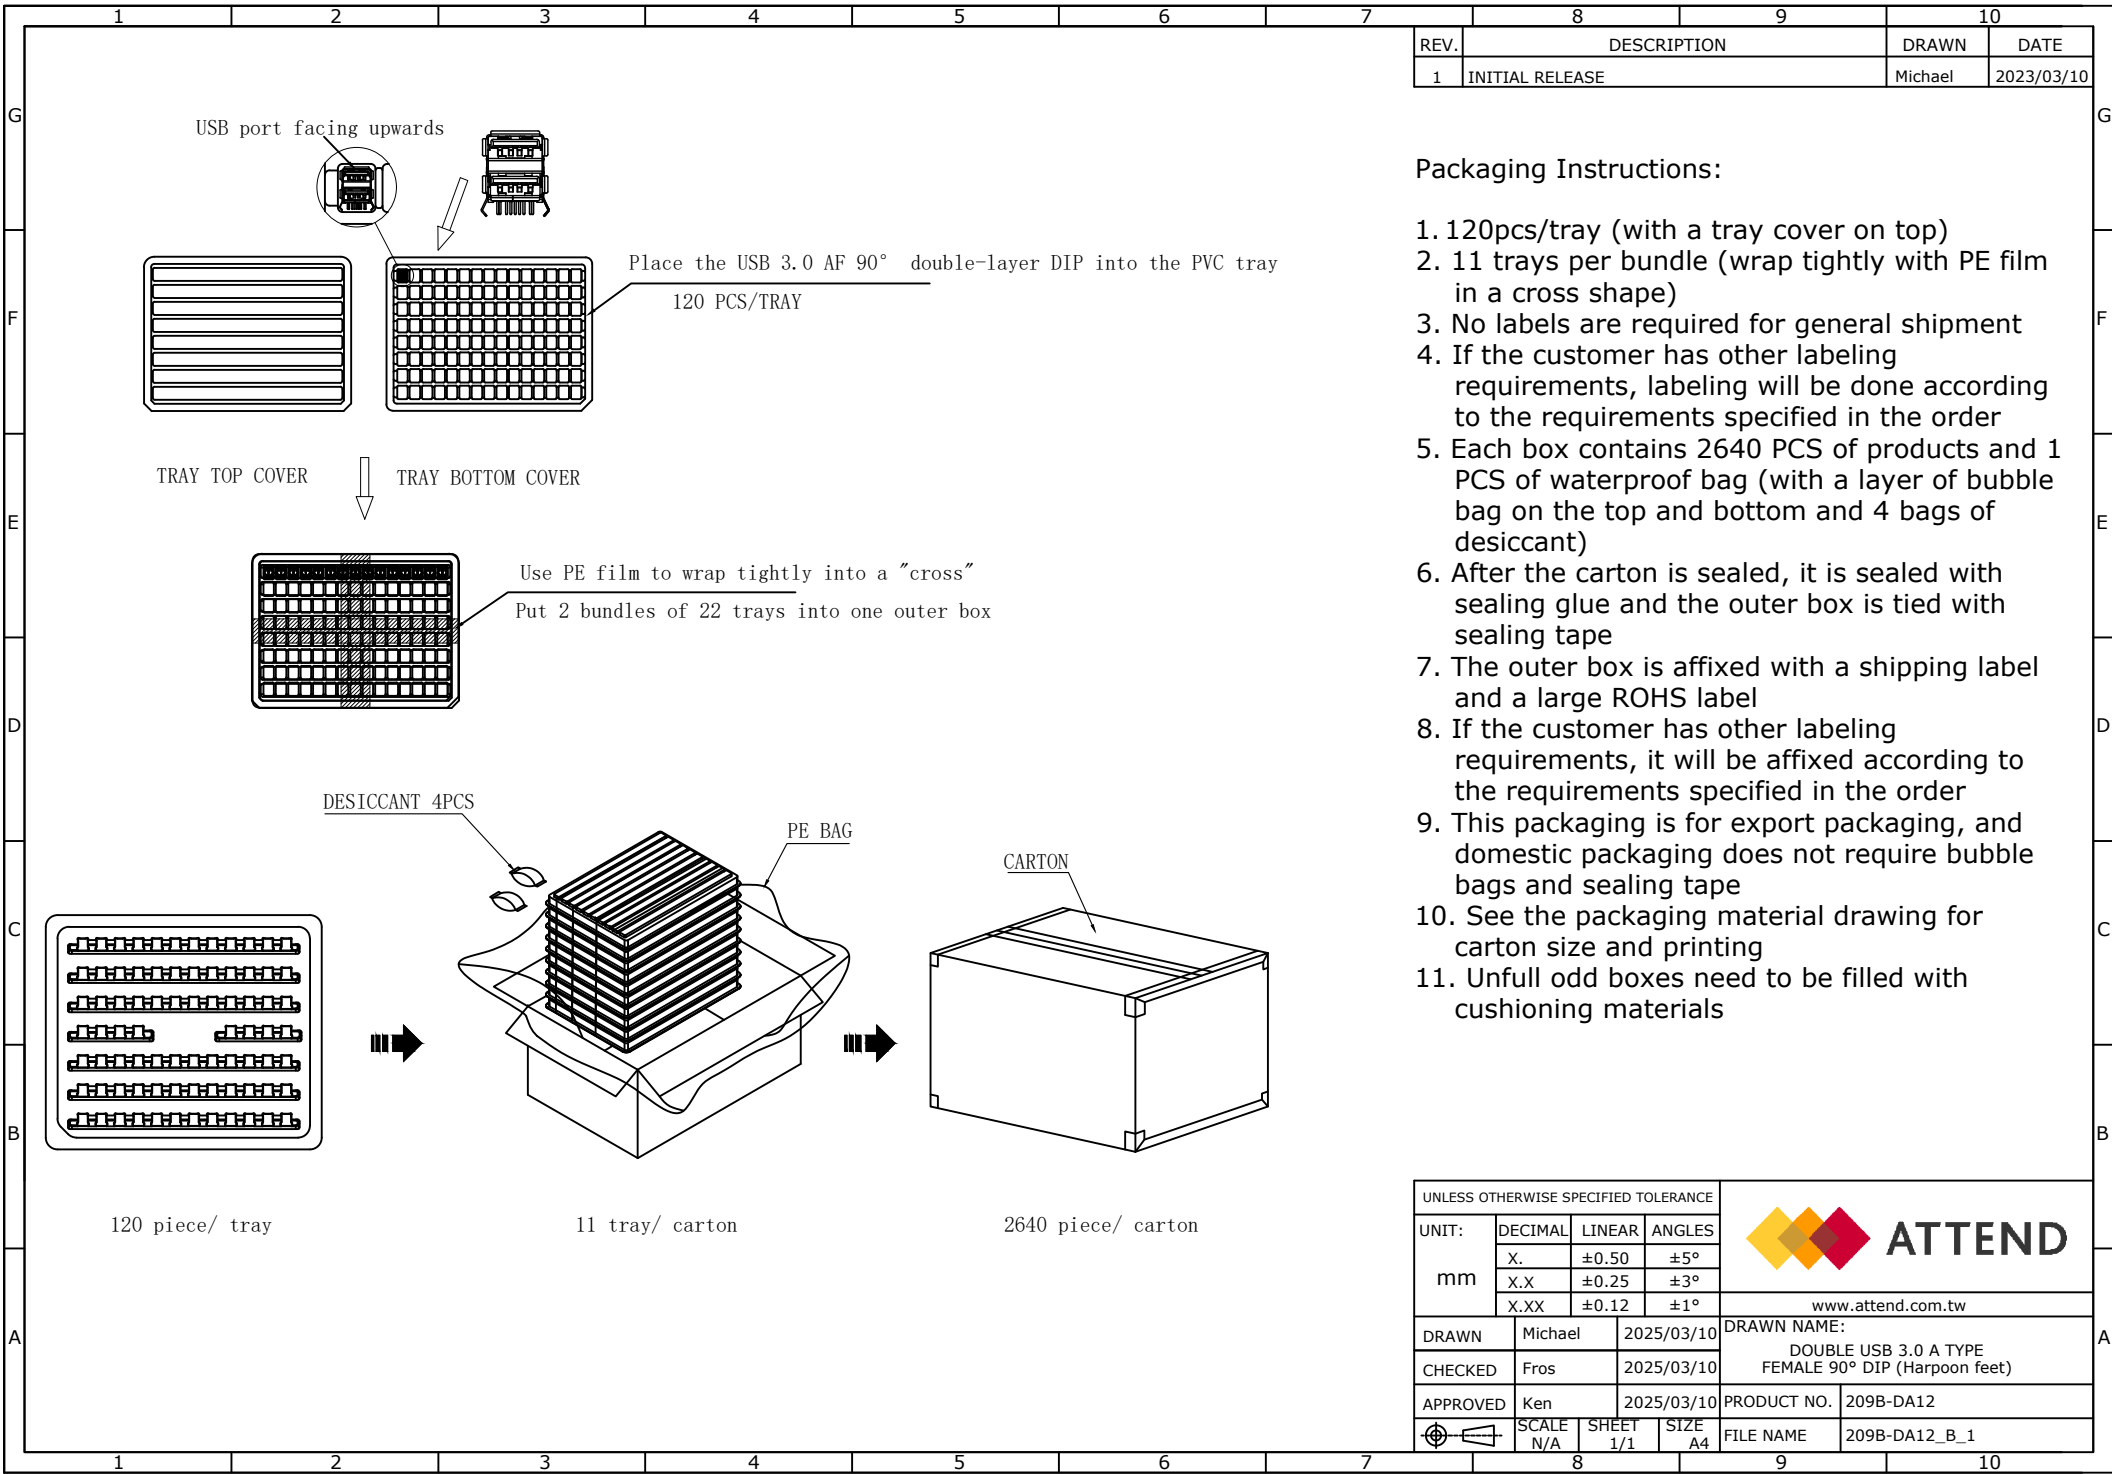

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2023/03/10

Packaging Instructions:

- 120pcs/tray (with a tray cover on top)
- 11 trays per bundle (wrap tightly with PE film in a cross shape)
- No labels are required for general shipment
- If the customer has other labeling requirements, labeling will be done according to the requirements specified in the order
- Each box contains 2640 PCS of products and 1 PCS of waterproof bag (with a layer of bubble bag on the top and bottom and 4 bags of desiccant)
- After the carton is sealed, it is sealed with sealing glue and the outer box is tied with sealing tape
- The outer box is affixed with a shipping label and a large ROHS label
- If the customer has other labeling requirements, it will be affixed according to the requirements specified in the order
- This packaging is for export packaging, and domestic packaging does not require bubble bags and sealing tape
- See the packaging material drawing for carton size and printing
- Unfull odd boxes need to be filled with cushioning materials

UNLESS OTHERWISE SPECIFIED TOLERANCE					ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Michael	2025/03/10		DRAWN NAME: DOUBLE USB 3.0 A TYPE FEMALE 90° DIP (Harpoon feet)		
CHECKED	Fros	2025/03/10				
APPROVED	Ken	2025/03/10		PRODUCT NO.	209B-DA12	
	SCALE N/A	SHEET 1/1	SIZE A4	FILE NAME	209B-DA12_B_1	