
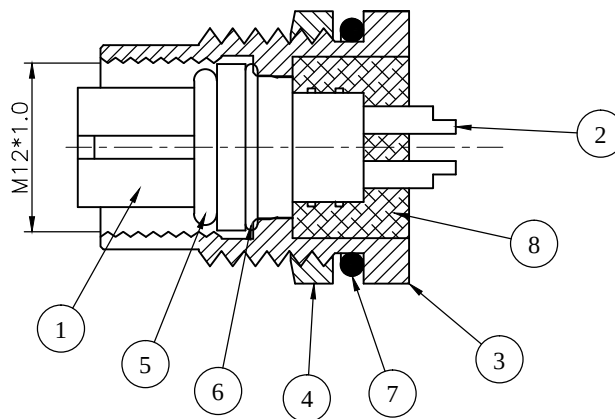
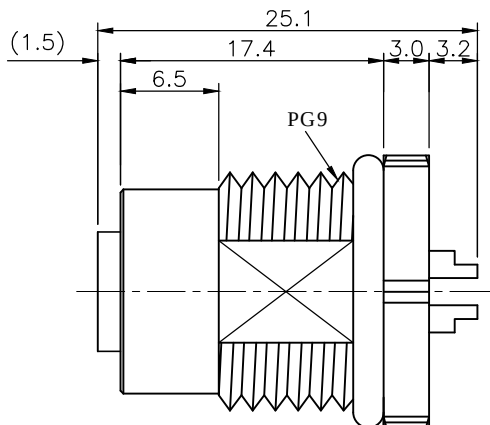
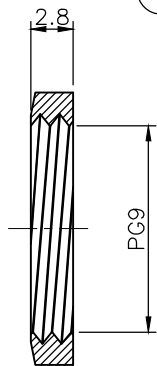
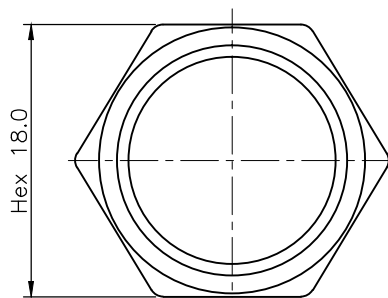



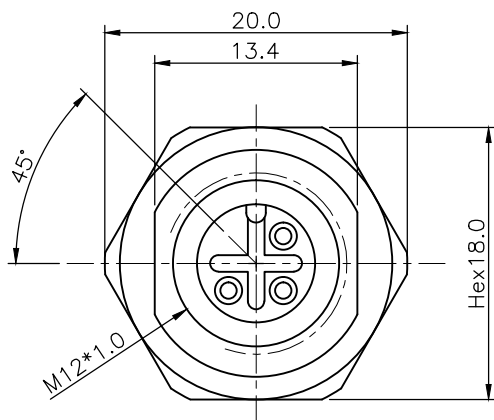

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2020/05/08
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:


1. Current Rating: 4A
2. Voltage Rating: 250V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C

8	EPOXY	EF400A & EF400B, Black
7	O-RING	EPDM
6	O-RING	EPDM
5	O-RING	EPDM
4	NUT	Brass, Nickel plating
3	SHELL	Brass, Nickel plating
2	CONTACT	Brass, 10u" Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black


NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: m m	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
WWW.ATTEND.COM.TW					
DRAWN	Fros	2020/05/08		DRAWN NAME: M12 A- Code Receptacle, 3Pin Female Straight Solder Type Front Fastened, PG9	
CHECKED	Tim	2020/05/08			
APPROVED	Ken	2020/05/08		PRODUCT NO.	216A-03FAF
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME	216A-03FAF_B_2




1. Wire Processing

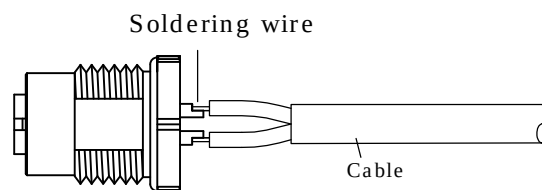

2. Installation Direction

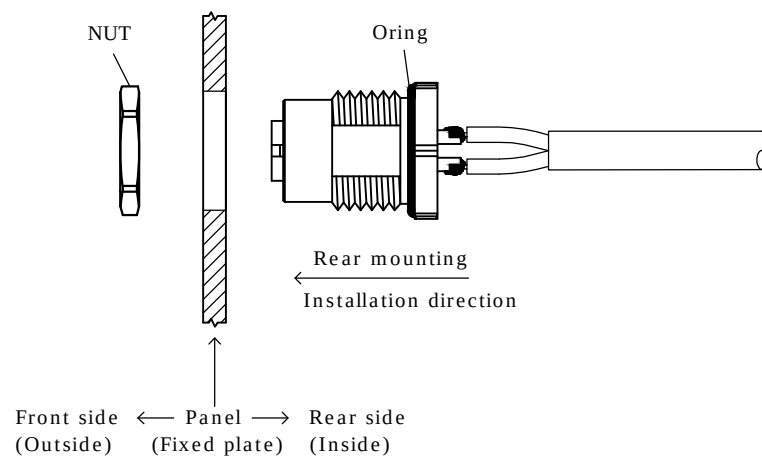

3. Connector Mated to Panel Mount

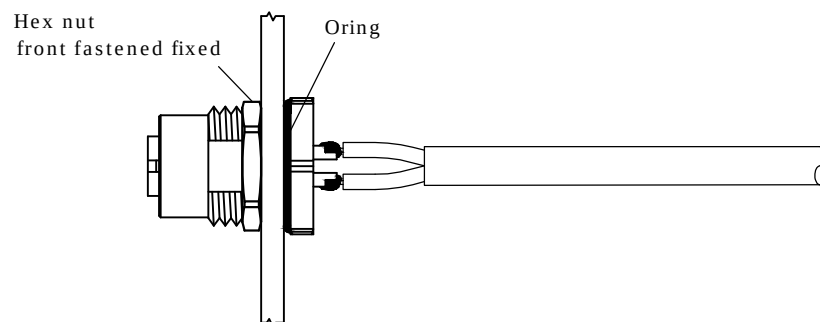

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Tim	2025/02/25	DRAWN NAME:			
CHECKED	Fros	2025/02/25	M Series For Female Solder Type Front Fastener Design Guide			
APPROVED	Ken	2025/02/25	PRODUCT NO.			
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FAF_DG	